

DOCKETED

Docket Number:	85-AFC-03C
Project Title:	Compliance - Application for Certification for Midway-Sunset Cogeneration Project
TN #:	270911
Document Title:	2026 Midway Sunset Report Unit A Annual Compliance and Accuracy Test
Description:	N/A
Filer:	Stephanie Urias
Organization:	Midway Sunset Cogeneration Company
Submitter Role:	Applicant
Submission Date:	6/22/2026 10:02:03 AM
Docketed Date:	6/22/2026



June 19, 2026

CC-2299

Dave Born
Supervising Air Quality Inspector
SJVAPCD
34946 Flyover Court
Bakersfield, CA 93308

Subject: Annual Compliance and Relative Accuracy Testing of Unit A

Dear Mr. Born,

Please find attached the Annual Compliance and RATA test reports for Unit A PTO # S-1135-224-30.

If you have any questions or comments, please contact Greg Jans at 661-768-3018 or Corey Lahammer at 661-768-3021.

I declare that, based on information and belief formed after reasonable inquiry, the information provided in this letter is true, accurate and complete.

Sincerely,

A handwritten signature in dark ink, appearing to read "Lowell Pollema", is written over a light blue horizontal line.

Lowell Pollema
Executive Director

*Annual Compliance and Relative Accuracy Testing of Unit A was submitted using PAS Facility Portal.

cc: File CC-2299 (1 Hard Copy & CD Unit A)
 Library (1 Hard Copy Unit A)
 R. Eddy CEC (Supplied on CEC Portal)
 Director EPA (Uploaded into EPA's Central Data Exchange (CDX))
 Chief CARB (1 CD Unit A)

**Source Test Report for 2026 Compliance Test and
Relative Accuracy Test Audit
Unit A
Midway Sunset Cogeneration Company
Fellows, California**

Prepared For:

**Midway Sunset Cogeneration Company
3466 W. Crocker Springs Road
Fellows, CA 93224-0457**

Prepared By:

**Montrose Air Quality Services, LLC
19479 Creek Road
Bakersfield, California 93314**

For Submission To:

**San Joaquin Valley Air Pollution Control District
34946 Flyover Court
Bakersfield, California 93308**

Document Number: PROJECT-066225-RT-8482

Test Dates: April 21-22, 2026

Submittal Date: 6/19/2026





Review and Certification

All work, calculations, and other activities and tasks performed and presented in this document were carried out by me or under my direction and supervision. I hereby certify that, to the best of my knowledge, Montrose operated in conformance with the requirements of the Montrose Quality Management System and ASTM D7036-04 during this test project.

Signature: _____ **Date:** 6/19/2026

Name: Jim Polhamus **Title:** Client Project Manager

I have reviewed, technically and editorially, details, calculations, results, conclusions, and other appropriate written materials contained herein. I hereby certify that, to the best of my knowledge, the presented material is authentic, accurate, and conforms to the requirements of the Montrose Quality Management System and ASTM D7036-04.


Signature: _____ **Date:** 6/19/2026

Name: Amber Little **Title:** Reporting Hub Manager, Antioch/PNW



Table of Contents

<u>Section</u>	<u>Page</u>
1.0 Introduction	5
1.1 Summary of Test Program	5
1.2 Key Personnel	9
2.0 Plant and Sampling Location Descriptions	11
2.1 Process Description, Operation, and Control Equipment	11
2.2 CEM System Description	11
2.3 Data Acquisition System	12
2.4 Flue Gas Sampling Location	12
2.5 Operating Conditions and Process Data	12
3.0 Sampling and Analytical Procedures	13
3.1 Test Methods	13
3.1.1 EPA Methods 3A, 7E, and 10 – Gaseous Emissions	13
3.1.2 EPA Method 18 – Measurement of Gaseous Organic Compound Emissions by Gas Chromatography	14
3.1.3 Relative Accuracy Test Audit	15
3.1.4 ASTM D1945/D3246 – Fuel F _d , and HHV	16
3.1.5 EPA Method 19 – Volumetric Flow Rate	16
3.2 Process Test Methods	16
4.0 Test Discussion and Results	17
4.1 Field Test Deviations and Exceptions	17
4.2 Presentation of Results	17
5.0 Internal QA/QC Activities	28
5.1 QA/QC Audits	28
5.2 QA/QC Discussion	28
5.3 Quality Statement	28

List of Appendices

A	Field Data and Calculations	29
A.1	VOC Data Sheets	30
A.2	Instrumental Test Method Data	32
A.3	Emission Calculations/Results	59
A.4	RATA Calculations/Results	62
A.5	Example Calculations	77
A.6	General Equations	83
B	Facility Process Data	89



C	Laboratory Analysis Data	103
C.1	VOC Analyses	107
C.2	Fuel Gas Analyses	110
D	Quality Assurance/Quality Control	112
D.1	Units and Abbreviations.....	113
D.2	Calibration Gas Certs	121
D.3	Strip Charts.....	129
D.4	Accreditation Information/Certifications	141
D.5	Quality Assurance Program Summary and Equipment Calibration Schedule	146
E	Regulatory Information	152
E.1	Regulatory Permit to Operate	154

List of Tables

1-1	Summary of Test Program	6
1-2	Summary of Average Compliance Results – Unit A.....	7
1-3	Summary of Average RATA Results – Unit A	8
1-4	Test Personnel and Observers.....	10
4-1	Gaseous Emissions Results - Compliance Unit A	18
4-2	Relative Accuracy Test Results NO _x , ppm @ 15% O ₂ - Unit A.....	19
4-3	Relative Accuracy Test Results NO _x , lb/hr - Unit A	20
4-4	Relative Accuracy Test Results CO, ppm @ 15% O ₂ - Unit A	21
4-5	Relative Accuracy Test Results CO, lb/hr - Unit A.....	22
4-6	Relative Accuracy Test Results O ₂ , % - Unit A	23
4-7	Relative Accuracy Test Results CO ₂ , % - Unit A	24
4-8	Relative Accuracy Test Results NO _x , ppm @ 15% O ₂ – Old Horiba Unit A	25
4-9	Relative Accuracy Test Results CO, ppm - Old Horiba Unit A.....	26
4-10	Relative Accuracy Test Results O ₂ , % - Old Horiba Unit A	27

List of Figures

3-1	EPA METHODS 3A (O ₂ /CO ₂), 7E, 10 SAMPLING SYSTEM.....	15
-----	--	----



1.0 Introduction

1.1 Summary of Test Program

Midway Sunset Cogeneration Company (MSCC) contracted Montrose Air Quality Services, LLC (MAQS) to perform a series of emission tests on one 78.2 MW, GE Frame 7E, with ultra-dry low NO_x combustor cans (DLN+TE), and unfired Heat Recovery Steam Generator (HRSG) at the Midway Sunset Cogeneration facility located near Taft, California. The tests were conducted on Unit A to determine compliance with the source testing limitations of the San Joaquin Valley Air Pollution Control District (SJVAPCD) Permit to Operate (PTO) No. S-1135-224-30. Additional tests were performed to audit the performance of the continuous emission monitoring system (CEMS) in accordance with all applicable regulatory requirements, including but not limited to 40 CFR Part 75 (where applicable) and 40 CFR Part 60, Appendix B.

The tests were conducted by Mr. Jim Polhamus and Mr. Sergio Figueroa of Montrose Air Quality Services, LLC (MAQS) on April 21-22, 2026. Mr. Corey Lahammer of MSCC coordinated the testing program. The tests were conducted according to the test plan dated March 16, 2026 that was submitted to and approved by SJVAPCD. Montrose Air Quality Services, LLC (MAQS) performed the tests to measure the following emission parameters:

- Emission Compliance:
 - CO (ppm @ 15% O₂, lb/hr, lb/MMBtu)
 - NO_x (ppm @ 15% O₂, lb/hr, lb/MMBtu)
 - Volatile Organic Compounds (VOC's as CH₄) (lb/hr, lb/MMBtu)
 - Sulfur Dioxide (SO₂) (lb/hr, lb/MMBtu)
- O₂ and CO₂ (% volume dry)
- Part 60 Relative Accuracy Test Audit (O₂, CO₂, CO, and NO_x)
- Fuel Analysis ("F_d" factor, HHV, Sulfur Content)
- Turbine Efficiency (%)

Montrose performed the tests to measure the emission parameters listed in Table 1-1.



Table 1-1
Summary of Test Program

Test Date(s)	Unit ID/ Source Name	Activity/Parameters	Test Methods	No. of Runs	Duration (Minutes)
April 21-22, 2026	MSCC / Unit A	Compliance / RATA O ₂ , CO ₂	EPA 3A	10	30
April 21-22, 2026	MSCC / Unit A	Compliance / RATA NO _x	EPA 7E	10	30
April 21-22, 2026	MSCC / Unit A	Compliance / RATA CO	EPA 10	10	30
April 21, 2026	MSCC / Unit A	Compliance VOC	EPA 18	3	30
April 21, 2026	MSCC / Unit A	Compliance VOC	ASTM D1945/D3588	1	Fuel Sample
April 21, 2026	MSCC / Unit A	Compliance SO ₂	ASTM D3246	1	Fuel Sample
April 23-22, 2026	MSCC / Unit A	Stoichiometric Calculations	EPA 19	--	--

To simplify this report, a list of Units and Abbreviations is included in Appendix D.1. Throughout this report, chemical nomenclature, acronyms, and reporting units are not defined. Please refer to the list for specific details.

This report presents the test results and supporting data, descriptions of the testing procedures, descriptions of the facility and sampling locations, and a summary of the quality assurance procedures used by Montrose. The average compliance emission test results are summarized and compared to their respective permit limits in Table 1-2. The RA test results are summarized and compared to their respective regulatory requirements in Table 1-3. Detailed results for individual test runs can be found in Section 4.0. All supporting data can be found in the appendices.

The testing was conducted by the Montrose personnel listed in Table 1-4.



Table 1-2
Summary of Average Compliance Results – Unit A
April 21, 2026

Parameter/Units	Average Results	Permit Limits
Unit Data		
Efficiency %	30.7	--
Load, Megawatts	83.7	--
Fuel Flow Rate, scfh	907,505	--
Fd factor @ 68°F, dscf/MMBtu	8,624	--
HHV @ 68°F, btu/scf	1,025	--
Stack flow rate, dscfm	444,983	--
Nitrogen Oxides (NO_x)		
ppmvd	4.80	--
ppmvd @ 15% O ₂	4.51	5.0
lb/hr	15.29	17.66
lb/MMBtu	0.016	0.018
Carbon Monoxide (CO)		
ppmvd	1.56	--
ppmvd @ 15% O ₂	1.47	25
lb/hr	3.04	54.91
lb/MMBtu	0.003	0.057
Volatile Organic Compounds (VOC)		
ppmvd	<0.50	--
ppmvd @ 15% O ₂	<0.47	--
lb/hr	<0.56	9.00
lb/MMBtu	<0.001	0.009
Sulfur Dioxide (SO₂)		
gr/100 scf	0.030	--
ppmvd @ 15% O ₂	0.02	--
lb/hr	0.08	0.92
lb/MMBtu	0.0001	0.001



Table 1-3
Summary of Average RATA Results – Unit A
April 21-22, 2026

Parameter/Units	Unit A Results	Performance Specification, Part 60	Allowable
Oxygen (O₂) Analyzer			
% volume dry	0.01% difference	PS-3	≤ 1.0% O ₂
Carbon Dioxide (CO₂) Analyzer			
% volume dry	0.17% difference	PS-3	≤ 1.0% CO ₂
Nitrogen Oxides (NO_x) Analyzer			
ppmvd @ 15% O ₂	1.42% of RM	PS-2	≤ 20% of RM
lb/hr	1.49% of RM	PS-2	≤ 20% of RM
Carbon Monoxide (CO) Analyzer			
ppmvd @ 15% O ₂	2.91% of AS	PS-4	≤ 5% of AS
lb/hr	15.7% of RM	PS-6	≤ 20% of AS

Table1-4
Summary of Average RATA Results – Old Horbia CEMS Unit A
April 21-22, 2026

Parameter/Units	Unit A Results	Performance Specification, Part 60	Allowable
Oxygen (O₂) Analyzer			
% volume dry	0.06% difference	PS-3	≤ 1.0% O ₂
Nitrogen Oxides (NO_x) Analyzer			
ppmvd @ 15% O ₂	8.81% of RM	PS-2	≤ 20% of RM
Carbon Monoxide (CO) Analyzer			
ppmvd	1.58% of AS	PS-4A	≤ 5 ppm of Difference



1.2 Key Personnel

A list of project participants is included below:

Facility Information

Source Location: Midway Sunset Cogeneration Company
3466 W. Crocker Springs Road
P.O Box 457
Fellows, California 93224-0457

Project Contact: Stephanie Urias
Role: Environmental Supervisor
Company: Midway Sunset Cogeneration Company
Telephone: 661-768-3037
Email: SUrias@midwaysunset.com

Agency Information

Regulatory Agency: San Joaquin Valley Air Pollution Control District-Southern Region
Agency Contact: Mr. Dave Born
Telephone: 661-392-5559
Email: Dave.Born@valleyair.org

Testing Company Information

Testing Firm: Montrose Air Quality Services, LLC
Contact: Jim Polhamus
Title: Client Project Manager
Telephone: 661-333-6245
Email: jpolhamus@montrose-env.com

Laboratory Information

Laboratory: PGT
City, State: Bakersfield, California
Method: EPA 18, ASTM D1945/D3588,
ASTM D3246



Test personnel and observers are summarized in Table 1-4.

Table 1-4
Test Personnel and Observers

Name	Affiliation	Role/Responsibility
Jim Polhamus	Montrose	Project Manager/Field Team Leader/Qualified Individual (QI)/Trailer operator
Sergio Figueroa	Montrose	Sr. Technician /Sample recovery/Sample train operator
Jim Polhamus	Montrose	Calculations and report preparation
Corey Lahammer	Midway Sunset Cogeneration	Client Liaison/Test Coordinator



2.0 Plant and Sampling Location Descriptions

2.1 Process Description, Operation, and Control Equipment

The Midway Sunset Cogeneration facility is located at 3466 W. Cocker Springs Road, Fellows, California. The facility includes three 78.2 megawatt General Electric 7E natural gas-fired turbine engine/generators with Unit A serving as either energy peaking or Cogen unit. The turbines are served by inlet air filtration and cooling systems, dry Low-NO_x combustors, selective catalytic reduction (SCR) systems and Horiba dry extractive continuous emissions monitoring systems (CEMS) to measure O₂, CO₂, CO, and NO_x.

2.2 CEM System Description

All flue gas pollutant and diluent measurements are made on a dry basis. Effluent gas from the sampling location is filtered and transported through a heated sample line to the sample conditioning system in the main analyzer cabinet. The sample conditioning system again filters the effluent gas and a chilled condenser removes the moisture. The dry, particulate-free effluent gas is then routed to the analyzers. The analog outputs of the analyzers and certain plant inputs are transmitted to a system controller.

A Horiba ENDA controls the CEMS and provides timing and control of the sampling system, receives analog inputs from the analyzers, and provides corrected and calculated analog outputs. Automatic zero and span calibrations are performed on the CEMS monitors every twenty-four hours. Certified EPA Protocol calibration gases are injected at a valve box behind the probe. Table 2-1 outlines the make, model and operating ranges of the individual analyzers.

**TABLE 2-1
ANALYZER INFORMATION
MIDWAY SUNSET COGENERATION FACILITY
UNIT A**

Analyzer	Manufacturer / Model	Analyzer Range
O ₂	Horiba Instruments / ENDA E4420L / CMA-EC662L1	0-25%
CO	Horiba Instruments / ENDA E4420L / CMA-EC662L1	0-10 / 0-100 ppm
NO _x	Horiba Instruments / ENDA E4420L / CMA-EC662L1	0-10 / 0-150 ppm
CO ₂	Horiba Instruments / ENDA E4420L / CMA-EC662L1	0-20%



2.3 Data Acquisition System

The CEMS data acquisition and reporting system is controlled by the data acquisition and handling system (DAHS). The DAHS is a PC-based, multi-user, multi-tasking system. The DAHS provide automated data monitoring and management capabilities to the CEMS using ESC supplied software. The DAHS is utilized for operator interface, data storage, report generation, and data display. The Horiba ENDA system transmits data from the analyzers to the DAHS and polls the Horiba ENDA system every ten seconds. The system generates one-minute averages, from which 15-minute values are then calculated. All data is then reduced to 1-hour averages to comply with 40 CFR, Part 60.

The DAHS will indicate any occurrence of specification limit exceedances or CEM operational problems and will generate reports in the required format for submittal to the applicable regulatory agencies. These reports may be produced in either hard copy or electronic format and can be made available for telemetry transmission.

2.4 Flue Gas Sampling Location

The Reference Method (RM) CEMS sampling location was taken from a sampling tee installed on facilities CEMS prior to the CEMS condenser. Since these units currently operate in the simple cycle mode, the stack gas samples were taken from each unit's CEMS multi-point probe located across the transition duct. The probe consists of sixteen sampling locations which feeds into a common header. The RM sample was withdrawn from a tee installed on the unit's probe line prior to the CEMS sample conditioner.

2.5 Operating Conditions and Process Data

The emission tests were conducted while the turbine was operating at 90%-100% of baseload specified by PTO. Test conditions were established by MSCC personnel. The unit was fired exclusively on PUC-quality natural gas throughout the emission tests. Test conditions changed slightly from run to run due primarily to the change in ambient conditions and Cal ISO requirements.

Plant personnel were responsible for establishing the test conditions and collecting all applicable unit-operating data. The process data that was provided is presented in Appendix B.



3.0 Sampling and Analytical Procedures

3.1 Test Methods

The test methods for this test program have been presented in Table 1-1. Additional information regarding specific applications or modifications to standard procedures is presented below.

3.1.1 EPA Methods 3A, 7E, and 10 – Gaseous Emissions

Concentrations of O₂, CO₂, NO_x, and CO are measured simultaneously using EPA Methods 3A, 7E, and 10, which are instrumental test methods. Conditioned gas is sent to a series of analyzers to measure the gaseous emission concentrations. The performance requirements of the method must be met to validate the data.


Pertinent information regarding the performance of the method is presented below:

- Method Options:
 - A dry extractive sampling system is used to report emissions on a dry basis
 - A paramagnetic analyzer is used to measure O₂
 - A nondispersive infrared analyzer is used to measure CO₂
 - A chemiluminescent analyzer is used to measure NO_x
 - A gas filter correlation nondispersive infrared analyzer is used to measure CO
- Method Exceptions:
 - A stratification test is not performed since the stack gas samples were taken from the CEMS multi-point probe located across the transition duct
- Target and/or Minimum Required Sample Duration: 30 minutes

The typical sampling system is detailed in Figure 3-1.



**Figure 3-1
EPA METHODS 3A (O₂/CO₂), 7E, 10 SAMPLING SYSTEM**

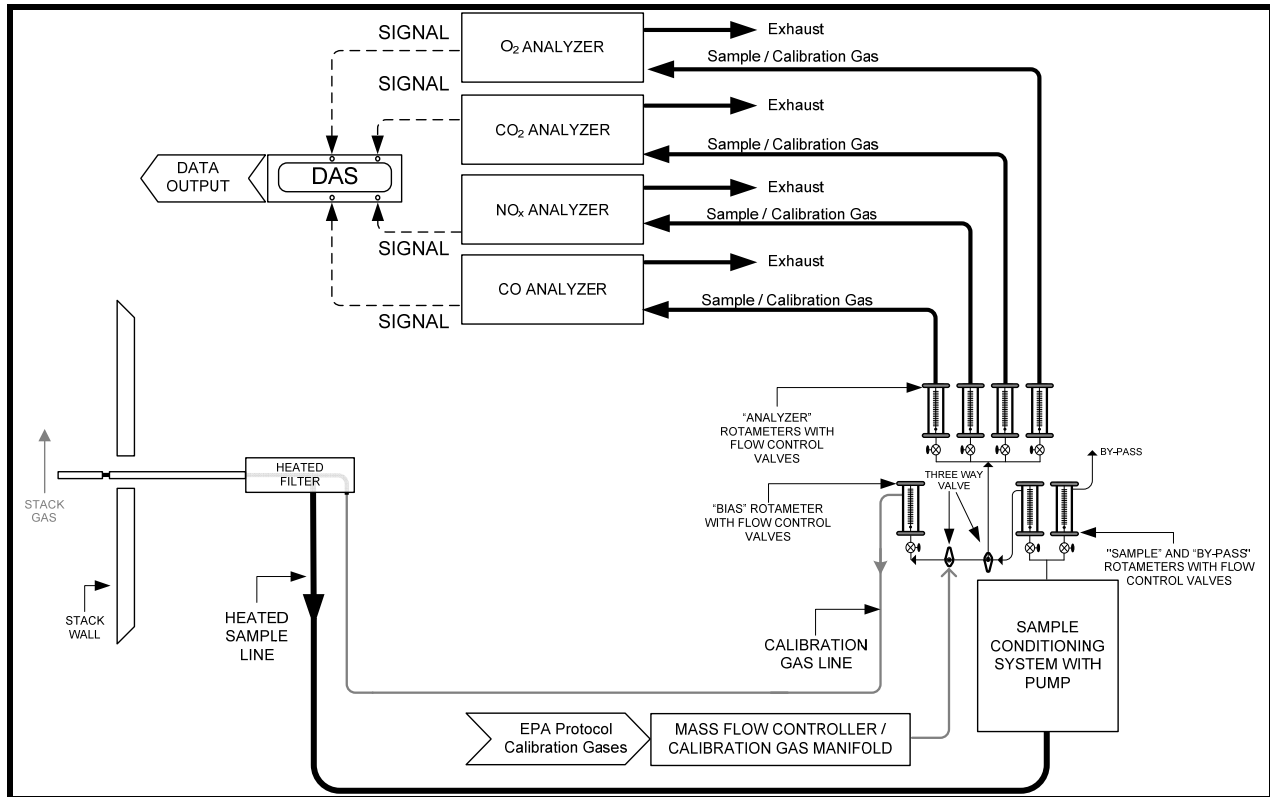

3.1.2 EPA Method 18 – Measurement of Gaseous Organic Compound Emissions by Gas Chromatography

EPA Method 18 is used to measure gaseous organic compounds from stationary sources. The major organic components of a gas mixture are separated by gas chromatography (GC) and are individually quantified using a flame ionization detector (FID), photoionization detector (PID), electron capture detector (ECD), or other appropriate detection principles. The retention times of each separated component are compared with those of known compounds under identical conditions. The GC analyst confirms the identity and approximate concentrations of the organic emission components beforehand. With this information, the analyst then prepares or purchases commercially available standard mixtures to calibrate the GC under conditions identical to those of the samples. The analyst also determines the need for sample dilution to avoid detector saturation, gas stream filtration to eliminate particulate matter, and prevention of moisture condensation.

Pertinent information regarding the performance of the method is presented below:

- Method Options:
 - Integrated bag sampling and analysis is performed



- Method Exceptions:
 - No pre-survey samples are collected since the expected ranges of concentrations of the samples have been determined
- Target Analytes: Methane, ethane, propane, n-butane, n-pentane, n-hexane, excluding exempt compounds as defined by SJVAPCD
- Target and/or Minimum Required Sample Duration: 30 minutes
- Analytical Laboratory: PGT, Bakersfield, CA

3.1.3 Relative Accuracy Test Audit

The turbine unit incorporates its own CEMS measuring dry-basis concentrations of O₂, CO₂, CO, and NO_x. Results of the compliance test runs and the supplementary RATA test runs were used in the RATA of each system. Relative accuracy was calculated in units of ppm volume dry, ppm @ 15% O₂, and lb/hr for the CO and NO_x analyzers, and % difference for the O₂ / CO₂ analyzers. Ten 30-minute test runs were performed to complete the RATA as specified in 40 CFR, Part 60, Appendices B.

For each reference method (RM) determination, the flue gas was taken from a single sampling point located at the tee of facilities CEMS probe. The differences between the RM sample and the pollutant monitor's readings were evaluated from nine sets of paired monitor and RM test data. From these differences, the 95% confidence coefficient was calculated, and the relative accuracy determined. The test runs not included in the calculations for the determination of relative accuracy are still included in this report.

In accordance with 40 CFR, Part 60, Appendix B, Performance Specification 2, NO_x relative accuracy test results are acceptable if NO_x relative accuracy does not exceed 20% of the mean value of the RM test data in terms of units of the emission standard (if the average RM results are greater than 50% of the applicable standard). The results must be within 10% of the applicable standard (if the average RM results are less than 50% of the applicable standard).

In accordance with 40 CFR, Part 60, Appendix B, Performance Specification 4 (span values of 1,000 ppmv), CO relative accuracy test results are acceptable if the relative accuracy of the CEMS is no greater than 10% when the average RM value is used or 5% when the applicable emission standard is used. Alternately, 40 CFR, Part 60, Appendix B, Performance Specification 4A (CEMS that comply with low emission standards, less than 200 ppmv) states that CO relative accuracy test results are acceptable if within 5 ppmv when the relative accuracy is calculated as the absolute average difference between the RM and CEMS plus the 2.5% confidence coefficient.

Since the CO and NO_x analyzers incorporate equipment for determination and reporting of pollutant mass emission rates (in terms of mass per unit of time), the systems are technically defined as continuous emission rate monitoring systems (CERMS). In accordance with 40 CFR, Part 60, Appendix B, Performance Specification 6, relative accuracy test results for mass emissions are acceptable if relative accuracy does not exceed 20% of the mean value of the RM test data in terms of units of the emission standard (if the average RM



results are greater than 50% of the applicable standard). The results must be within 10% of the applicable standard (if the average RM results are less than 50% of the applicable standard).

The relative accuracy of the O₂ and CO₂ analyzers was determined in accordance with 40 CFR, Part 60, Appendix B, Performance Specification 3. The O₂ and CO₂ RATA results are acceptable if relative accuracy does not exceed 20.0% of the mean value of the RM test data. Alternately, results are acceptable if the mean difference of the O₂ monitor measurements and the corresponding RM measurements are within $\pm 1.0\%$ O₂.

3.1.4 ASTM D1945/D3246 – Fuel F_d, and HHV

Fuel sample was collected from the facility fuel supply into Tedlar bags and or fuel containers using a modified Gas Processors Association (GPA) 2166-86 method for sampling of natural gas. Analysis is performed by ASTM D1945 and D3588 for F_d, HHV (GCV). Pertinent information regarding the performance of the method is presented below:

- F Factor: Oxygen based F-factor, dry basis (F_d).
- F Factor Source: Analysis of fuel sample.
- Heat Input Data: Calculated based on fuel flow rate and higher heating value.
- Higher Heating Value Source: Analysis of fuel Sample.

3.1.5 EPA Method 19 – Volumetric Flow Rate

Stack gas volumetric flow rates were determined by stoichiometric calculations based on fuel flow rates (from the plant's certified fuel flow meters), fuel composition (from gas analysis data), and excess O₂ (%) measured from the flue gas. Calculations were performed using an "F" factor and higher heating value for natural gas as outlined in EPA Method 19. The results, presented in dry standard cubic feet per minute (dscfm), were used with the measured emission concentrations to calculate mass emission rates in lb/hr and lb/MMBtu.

3.2 Process Test Methods

The plant's unit operating data was used to document process conditions during the test runs. Unit operating data was provided by MSCC personnel. Data presented in this report includes fuel flow rates, and power output to document load conditions. The data also includes CEMS averages during the RATA runs required to calculate relative accuracy results. MAQS provided barometric pressure and ambient temperature data throughout the day if required.



4.0 Test Discussion and Results

4.1 Field Test Deviations and Exceptions

No field deviations or exceptions from the test plan or test methods occurred during this test program.

4.2 Presentation of Results

The average results are compared to the permit limits in Table 1-2. The results of individual compliance and RATA test runs performed are presented in Tables 4-1 and through 4-10. Emissions are reported in units consistent with those in the applicable regulations or requirements. Additional information is included in the appendices as presented in the Table of Contents.



Table 4-1
Gaseous Emissions Results - Unit A

Test No.	1	2	3	Average	Permit Limits
Date:	04/21/26	04/21/26	04/21/26	--	--
Start Time:	1855-1925	1938-2008	2020-2050	--	--
Process Data:					
Unit load, MW	83.4	83.6	84.0	83.7	--
Unit fuel flow @ 60 °F, scfh	905,353	907,153	910,010	907,505	--
"F _d " factor @ 68 °F, dscf/MMBtu	8,624	8,624	8,624	8,624	--
HHV @ 60 °F, btu/scf	1,025	1,025	1,025	1,025	--
Stack flow rate - based on fuel, dscfm	451,040	437,769	446,141	444,983	--
Flue gas:					
O ₂ , % volume dry	14.72	14.52	14.62	14.62	--
CO ₂ , % volume dry	3.56	3.70	3.57	3.61	--
CO Emissions:					
ppm volume dry	1.58	1.54	1.58	1.56	--
ppm dry @ 15% O ₂	1.50	1.42	1.48	1.47	25
lb/hr	3.10	2.93	3.07	3.04	54.91
lb/MMBtu	0.003	0.003	0.003	0.003	0.057
NO_x Emissions:					
ppm volume dry	4.73	4.88	4.78	4.80	--
ppm dry @ 15% O ₂	4.51	4.51	4.49	4.51	5.0
lb/hr	15.28	15.31	15.29	15.29	17.66
lb/MMBtu	0.016	0.016	0.016	0.016	0.018
VOC Emissions:					
ppm volume dry	<0.50	<0.50	<0.50	<0.50	--
ppm @ 15% O ₂	<0.48	<0.46	<0.47	<0.47	-
lb/hr as CH ₄	<0.56	<0.55	<0.56	<0.56	9.00
lb/MMBtu as CH ₄	<0.001	<0.001	<0.001	<0.001	0.009
SO₂ Emissions:					
gr/100 scf	0.030	0.030	0.030	0.030	0.31
ppm volume dry	0.02	0.02	0.02	0.02	--
ppm dry @ 15% O ₂	0.02	0.02	0.02	0.02	--
lb/hr	0.08	0.08	0.08	0.08	0.92
lb/MMBtu	0.0001	0.0001	0.0001	0.0001	0.0010

Note(s): VOC's are non-detect < 0.50 ppm



Table4-2
Relative Accuracy Test Results
NO_x, ppm @ 15% O₂ - Unit A

Run Number	Date	Time	RM CEMS	Plant CEMS	Difference
Run 1	4/21/26	1855-1925	4.51	4.44	0.073
Run 2	4/21/26	1938-2008	4.51	4.42	0.095
Run 3	4/21/26	2020-2050	4.49	4.45	0.045
Run 4	4/21/26	2110-2140	4.47	4.45	0.016
Run 5	4/21/26	2155-2225	4.45	4.44	0.009
Run 6	4/21/26	2237-2307	4.52	4.43	0.085
Run 7	4/21/26	2318-2348	4.51	4.45	0.067
Run 8	4/22/26	2359-0029	4.44	4.42	0.023
Run 9	4/22/26	0039-0109	4.44	4.44	0.002
Run 10	4/22/26	0138-0208	4.38	4.44	-0.064
AVERAGES:			4.47	4.44	0.028
STANDARD DEVIATION:					0.046
CONFIDENCE COEFFICIENT:					0.035
RELATIVE ACCURACY, %:					1.42

Note: Percent relative accuracy is based on the reference method using nine of the ten available test runs.



Table 4-3
Relative Accuracy Test Results
NO_x, lb/hr - Unit A

Run Number	Date	Time	RM CEMS	Plant CEMS	Difference
Run 1	4/21/26	1855-1925	15.28	15.02	0.264
Run 2	4/21/26	1938-2008	15.31	14.97	0.338
Run 3	4/21/26	2020-2050	15.29	15.16	0.131
Run 4	4/21/26	2110-2140	13.87	14.02	-0.149
Run 5	4/21/26	2155-2225	13.79	13.92	-0.128
Run 6	4/21/26	2237-2307	14.01	13.98	0.027
Run 7	4/21/26	2318-2348	14.01	14.04	-0.034
Run 8	4/22/26	2359-0029	13.78	13.92	-0.140
Run 9	4/22/26	0039-0109	13.79	14.00	-0.210
Run 10	4/22/26	0138-0208	13.58	13.98	-0.398
AVERAGES:			14.30	14.33	-0.030
STANDARD DEVIATION:					0.238
CONFIDENCE COEFFICIENT:					0.183
RELATIVE ACCURACY, %:					1.49

Note: Percent relative accuracy is based on the reference method using nine of the ten available test runs.



Table 4-4
Relative Accuracy Test Results
CO, ppm @ 15% O₂ - Unit A

Run Number	Date	Time	RM CEMS	Plant CEMS	Difference
Run 1	4/21/26	1855-1925	1.50	0.93	0.573
Run 2	4/21/26	1938-2008	1.42	0.88	0.544
Run 3	4/21/26	2020-2050	1.48	0.91	0.574
Run 4	4/21/26	2110-2140	3.60	3.00	0.595
Run 5	4/21/26	2155-2225	4.16	3.55	0.604
Run 6	4/21/26	2237-2307	5.30	4.61	0.696
Run 7	4/21/26	2318-2348	5.62	4.83	0.794
Run 8	4/22/26	2359-0029	5.85	5.10	0.751
Run 9	4/22/26	0039-0109	6.77	6.04	0.736
Run 10	4/22/26	0138-0208	6.28	5.63	0.645
AVERAGES:			4.51	3.84	0.663
STANDARD DEVIATION:					0.083
CONFIDENCE COEFFICIENT:					0.064
RELATIVE ACCURACY, (Based on Applicable Std) %:					2.91

Note: Percent relative accuracy is based on the Applicable Standard using nine of the ten available test runs.



Table 4-5
Relative Accuracy Test Results
CO, lb/hr - Unit A

Run Number	Date	Time	RM CEMS	Plant CEMS	Difference
Run 1	4/21/26	1855-1925	3.10	2.01	1.093
Run 2	4/21/26	1938-2008	2.93	1.90	1.033
Run 3	4/21/26	2020-2050	3.07	1.93	1.141
Run 4	4/21/26	2110-2140	6.80	5.78	1.023
Run 5	4/21/26	2155-2225	7.85	6.75	1.098
Run 6	4/21/26	2237-2307	10.01	8.82	1.191
Run 7	4/21/26	2318-2348	10.62	9.27	1.345
Run 8	4/22/26	2359-0029	11.05	9.75	1.301
Run 9	4/22/26	0039-0109	12.79	11.54	1.248
Run 10	4/22/26	0138-0208	11.86	10.73	1.129
AVERAGES:			7.72	6.58	1.140
STANDARD DEVIATION:					0.093
CONFIDENCE COEFFICIENT:					0.072
RELATIVE ACCURACY, %:					15.69

Note: Percent relative accuracy is based on the reference method using nine of the ten available test runs



Table 4-6
Relative Accuracy Test Results
O₂, % - Unit A

Run Number	Date	Time	RM CEMS	Plant CEMS	Difference
Run 1	4/21/26	1855-1925	14.72	14.67	0.051
Run 2	4/21/26	1938-2008	14.52	14.66	-0.137
Run 3	4/21/26	2020-2050	14.62	14.65	-0.033
Run 4	4/21/26	2110-2140	14.83	14.89	-0.060
Run 5	4/21/26	2155-2225	14.82	14.90	-0.083
Run 6	4/21/26	2237-2307	14.96	14.94	0.017
Run 7	4/21/26	2318-2348	14.99	14.94	0.047
Run 8	4/22/26	2359-0029	14.98	14.93	0.050
Run 9	4/22/26	0039-0109	14.98	14.96	0.023
Run 10	4/22/26	0138-0208	14.87	14.93	-0.057
AVERAGES:			14.86	14.87	-0.005
STANDARD DEVIATION:					0.053
CONFIDENCE COEFFICIENT:					0.041
RELATIVE ACCURACY (Based on Absolute Difference),%:					0.01

Note: Percent relative accuracy is based on the absolute difference using nine of the ten available test runs.



Table 4-7
Relative Accuracy Test Results
CO₂, % - Unit A

Run Number	Date	Time	RM CEMS	Plant CEMS	Difference
Run 1	4/21/26	1855-1925	3.56	3.79	-0.232
Run 2	4/21/26	1938-2008	3.70	3.80	-0.102
Run 3	4/21/26	2020-2050	3.57	3.80	-0.227
Run 4	4/21/26	2110-2140	3.37	3.60	-0.230
Run 5	4/21/26	2155-2225	3.41	3.60	-0.189
Run 6	4/21/26	2237-2307	3.55	3.60	-0.054
Run 7	4/21/26	2318-2348	3.38	3.60	-0.223
Run 8	4/22/26	2359-0029	3.40	3.60	-0.205
Run 9	4/22/26	0039-0109	3.35	3.60	-0.254
Run 10	4/22/26	0138-0208	3.55	3.60	-0.048
AVERAGES:			3.50	3.67	-0.168
STANDARD DEVIATION:					0.08
CONFIDENCE COEFFICIENT:					0.060
RELATIVE ACCURACY (Based on Absolute Difference), %:					0.17

Note: Percent relative accuracy is based on the absolute difference using nine of the ten available test runs



Table 4-8
Relative Accuracy Test Results
NO_x, ppm @ 15% O₂ – Old Horiba Unit A

Run Number	Date	Time	RM CEMS	Plant CEMS	Difference
Run 1	4/21/26	1855-1925	4.51	4.17	0.345
Run 2	4/21/26	1938-2008	4.51	4.18	0.335
Run 3	4/21/26	2020-2050	4.49	4.20	0.295
Run 4	4/21/26	2110-2140	4.47	4.16	0.306
Run 5	4/21/26	2155-2225	4.45	4.05	0.395
Run 6	4/21/26	2237-2307	4.52	4.13	0.388
Run 7	4/21/26	2318-2348	4.51	4.07	0.443
Run 8	4/21/26	2359-0029	4.44	4.04	0.403
Run 9	4/22/26	0039-0109	4.44	4.06	0.385
Run 10	4/22/26	0138-0208	4.38	4.11	0.266
AVERAGES:			4.48	4.13	0.351
STANDARD DEVIATION:					0.057
CONFIDENCE COEFFICIENT:					0.044
RELATIVE ACCURACY, %:					8.81

Note: Percent relative accuracy is based on the reference method using nine of the ten available test runs



Table 4-9
Relative Accuracy Test Results
CO, ppm - Old Horiba Unit A

Run Number	Date	Time	RM CEMS	Plant CEMS	Difference
Run 1	4/21/26	1855-1925	1.58	0.81	0.765
Run 2	4/21/26	1938-2008	1.54	0.71	0.826
Run 3	4/21/26	2020-2050	1.58	0.78	0.800
Run 4	4/21/26	2110-2140	3.70	2.51	1.189
Run 5	4/21/26	2155-2225	4.28	2.96	1.324
Run 6	4/21/26	2237-2307	5.34	3.55	1.789
Run 7	4/21/26	2318-2348	5.63	4.11	1.520
Run 8	4/21/26	2359-0029	5.87	4.36	1.511
Run 9	4/22/26	0039-0109	6.80	5.09	1.706
Run 10	4/22/26	0138-0208	6.42	4.34	2.107
AVERAGES:			4.03	2.76	1.270
STANDARD DEVIATION:					0.397
CONFIDENCE COEFFICIENT:					0.305
RELATIVE ACCURACY (Based on Difference), PPM:					1.58

Note: Percent relative accuracy is based on the reference method using nine of the ten available test runs Based on within 5 ppm difference when the RA is calculated as the abs average difference between RM and CEMS plus 2.5 % confidence coefficient



Table 4-10
Relative Accuracy Test Results
O₂, % - Old Horiba Unit A

Run Number	Date	Time	RM CEMS	Plant CEMS	Difference
Run-4	4/21/26	1855-1925	14.72	14.59	0.130
Run 2	4/21/26	1938-2008	14.52	14.60	-0.080
Run 3	4/21/26	2020-2050	14.62	14.59	0.030
Run 4	4/21/26	2110-2140	14.83	14.80	0.030
Run 5	4/21/26	2155-2225	14.82	14.78	0.040
Run 6	4/21/26	2237-2307	14.96	14.81	0.150
Run 7	4/21/26	2318-2348	14.99	14.91	0.080
Run 8	4/21/26	2359-0029	14.98	14.81	0.170
Run 9	4/22/26	0039-0109	14.98	14.83	0.150
Run 10	4/22/26	0138-0208	14.87	14.82	0.050
AVERAGES:			14.81	14.75	0.064
STANDARD DEVIATION:					0.074
CONFIDENCE COEFFICIENT:					0.056
RELATIVE ACCURACY, (Based on Absolute Difference) %:					0.06

Note: Percent relative accuracy is based on the reference method using nine of the ten available test runs



5.0 Internal QA/QC Activities

5.1 QA/QC Audits

EPA Method 3A, 7E, and 10 calibration audits were all within the measurement system performance specifications for the calibration drift checks, system calibration bias checks, and calibration error checks.

The NO₂ to NO converter efficiency check of the analyzer was conducted per the procedures in EPA Method 7E, Section 8.2.4. The conversion efficiency met the criteria.

EPA Method 18 analytical QA/QC results are included in the laboratory report. The method QA/QC criteria were met.

5.2 QA/QC Discussion

All QA/QC criteria were met during this test program.

5.3 Quality Statement

Montrose is qualified to conduct this test program and has established a quality management system that led to accreditation with ASTM Standard D7036-04 (Standard Practice for Competence of Air Emission Testing Bodies). Montrose participates in annual functional assessments for conformance with D7036-04 which are conducted by the American Association for Laboratory Accreditation (A2LA). All testing performed by Montrose is supervised on site by at least one Qualified Individual (QI) as defined in D7036-04 Section 8.3.2. Data quality objectives for estimating measurement uncertainty within the documented limits in the test methods are met by using approved test protocols for each project as defined in D7036-04 Sections 7.2.1 and 12.10. Additional quality assurance information is included in the report appendices. The content of this report is modeled after the EPA Emission Measurement Center Guideline Document (GD-043).



Appendix A

Field Data and Calculations



Appendix A.1

VOC Data Sheets

TEDLAR BAG SAMPLING DATA SHEETCLIENT: MIDWAY SUNSET COGEN PERFORMED BY: SFLOCATION: CROCKER SPRINGS ROAD UNIT: UNIT A

Test #	1	2	3		
Date	4/21/26	4/21/26	4/21/26		
Time (start/stop)	1855	1938	2020		
Bag #	1 - VOC - A	2 - VOC - A	3 - VOC - A		

Comments: EPA -18



Appendix A.2

Instrumental Test Method Data



MAQDAQ 0.90 Beta			
Project Name: Midway Sunset	Project Number: PROJ	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Analyzer Configuration							
Name:			NOx				
Make/Model:							
25A or 7E:			7E				
Voltage max:			10				
Voltage offset:			0				
Range:			10				
Upscale:							
Downscale:							

Cylinder Information							
Zero Number:			CC163485				
Zero Conc:			0				
Low Number:							
Low Conc:							
Mid Number:			CC212465				
Mid Conc:			9.367				
High Number:			CC340026				
High Conc:			19.18				
Bias Number:			CC212465				
Bias Conc:			9.367				



MAQDAQ 0.90 Beta				
Project Name: Midway Sunset	Project Number: PROJ	CEMS Operator: JP	Unit/Condition: Unit A	
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False	
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)	

Calibration				
Name:	NOx			
Make/Model:	CAI 700			
25A or 7E:	7E			

Cylinder Concentrations				
Zero:	0.000			
Mid:	9.367			
High:	19.18			

Calibration Readings				
Zero reading:	0.078			
Mid reading:	9.299			
High reading:	19.20			

EPA Method 7E Error Calculations				
Zero %Err:	<2.0			
Mid %Err:	<2.0			
High %Err:	<2.0			



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length:	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803 (00)

NOx Converter Check		
Time	NOx reading, ppm	Efficiency, %
18:15:29	17.050	94.7%
18:15:39	17.110	95.0%
18:15:49	17.080	94.8%
18:15:59	17.040	94.6%
18:16:09	17.030	94.6%
18:16:19	17.070	94.8%
18:16:29	17.000	94.4%
18:16:39	16.980	94.3%
18:16:49	17.110	95.0%
18:16:59	17.070	94.8%
18:17:09	17.120	95.1%
18:17:19	17.120	95.1%
18:17:29	17.060	94.7%
18:17:39	17.120	95.1%
18:17:49	17.100	94.9%
18:17:59	17.010	94.4%

Summary	
Analyzer:	NOx
NO2 Cylinder Concentration:	18.01
NO2 Cylinder Number:	CC506970
NOx Analyzer Reading:	17.010
Efficiency:	94.4%



MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Analyzer Configuration							
Name:	O2	CO2	NOx		CO		
Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i		
25A or 7E:	7E	7E	7E		7E		
Voltage max:	10	10	10		10		
Voltage offset:	0	0	0		0		
Range:	25	10	10		10		
Upscale:	35	35	38		40		
Downscale:	35	35	38		40		

Cylinder Information							
Zero Number:	CC163485	CC163485	CC163485		CC163485		
Zero Conc:	0	0	0		0		
Low Number:							
Low Conc:							
Mid Number:	CC288623	CC288623	CC308437		CC308437		
Mid Conc:	10.93	5.018	5.019		4.999		
High Number:	CC317478	CC317478	CC212465		CC212465		
High Conc:	21.04	8.552	9.367		9.937		
Bias Number:	CC288623	CC288623	CC308437		CC308437		
Bias Conc:	10.93	5.018	5.019		4.999		



6/19

MONTROSE
ENVIRONMENTAL

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Calibration					
Name:	O2	CO2	NOx	CO	
Make/Model:	CAI 700	CAI 700	CAI 700	TECO 48i	
25A or 7E:	7E	7E	7E	7E	

Cylinder Concentrations					
Zero:	0.000	0.000	0.000	0.000	
Mid:	10.93	5.018	5.019	4.999	
High:	21.04	8.552	9.367	9.937	

Calibration Readings					
Zero reading:	0.015	0.024	0.028	0.006	
Mid reading:	11.00	4.965	4.879	5.034	
High reading:	21.01	8.552	9.361	9.944	

EPA Method 7E Error Calculations					
Zero %Err:	<2.0	0.071	0.281	0.299	0.060
Mid %Err:	<2.0	0.333	-0.620	-1.495	0.352
High %Err:	<2.0	-0.143	0.000	-0.064	0.070



MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Initial bias								
	Name:	O2	CO2	NOx		CO		
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i		
	25A or 7E:	7E	7E	7E		7E		

Cylinder Concentrations								
	Zero:	0.000	0.000	0.000		0.000		
	Mid:	10.93	5.018	5.019		4.999		
	High:	21.04	8.552	9.367		9.937		

Calibration Readings								
	Zero reading:	0.015	0.024	0.028		0.006		
	Mid reading:	11.00	5.197	4.879		5.034		
	High reading:	21.01	8.552	9.361		9.944		

EPA Method 7E Error Calculations								
Zero %Err:	<2.0	0.071	0.281	0.299		0.060		
Mid %Err:	<2.0	0.333	-0.620	-1.495		0.352		
High %Err:	<2.0	-0.143	0.000	-0.064		0.070		

Initial Bias Data								
	Zero reading:	0.057	0.096	0.081		0.067		
	Span reading:	10.75	5.142	4.482		4.952		
Zero % bias:	<5.0	-0.014	1.123	0.566		0.614		
Span % bias:	<5.0	-1.188	2.070	-4.238		-0.825		



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 1 Average Results								
18:55:00 - 19:25:00								
	Name:	O2	CO2	NOx		CO		
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i		
Apr 21 2026	18:56:01	14.53	3.726	4.121		1.882		
Apr 21 2026	18:57:00	14.54	3.717	4.093		1.807		
Apr 21 2026	18:58:00	14.53	3.712	4.098		1.728		
Apr 21 2026	18:59:00	14.55	3.720	4.119		1.772		
Apr 21 2026	19:00:00	14.53	3.718	4.162		1.744		
Apr 21 2026	19:01:01	14.53	3.709	4.175		1.673		
Apr 21 2026	19:02:00	14.54	3.697	4.213		1.631		
Apr 21 2026	19:03:01	14.53	3.695	4.246		1.620		
Apr 21 2026	19:04:00	14.55	3.694	4.255		1.582		
Apr 21 2026	19:05:01	14.54	3.699	4.242		1.587		
Apr 21 2026	19:06:00	14.53	3.696	4.269		1.545		
Apr 21 2026	19:07:00	14.54	3.694	4.295		1.528		
Apr 21 2026	19:08:00	14.54	3.707	4.272		1.537		
Apr 21 2026	19:09:01	14.54	3.702	4.311		1.553		
Apr 21 2026	19:10:00	14.53	3.703	4.341		1.582		
Apr 21 2026	19:11:00	14.54	3.705	4.297		1.541		
Apr 21 2026	19:12:00	14.55	3.708	4.315		1.553		
Apr 21 2026	19:13:01	14.54	3.710	4.307		1.540		
Apr 21 2026	19:14:00	14.54	3.709	4.309		1.578		
Apr 21 2026	19:15:00	14.56	3.698	4.291		1.556		
Apr 21 2026	19:16:00	14.55	3.697	4.300		1.579		
Apr 21 2026	19:17:00	14.54	3.698	4.285		1.665		
Apr 21 2026	19:18:01	14.55	3.695	4.304		1.619		
Apr 21 2026	19:19:00	14.53	3.686	4.311		1.595		
Apr 21 2026	19:20:00	14.56	3.697	4.313		1.706		
Apr 21 2026	19:21:00	14.55	3.682	4.278		1.593		
Apr 21 2026	19:22:01	14.54	3.680	4.290		1.571		
Apr 21 2026	19:23:00	14.53	3.672	4.283		1.574		
Apr 21 2026	19:24:00	14.56	3.681	4.298		1.769		
Apr 21 2026	19:25:00	14.55	3.663	4.274		1.642		
	Average:	14.54	3.699	4.256		1.628		
	Max:	14.56	3.726	4.341		1.882		
	Min:	14.53	3.663	4.093		1.528		



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 1 Post run bias									
18:55:00 - 19:25:00									
	Name:	O2	CO2	NOx		CO			
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i			
	25A or 7E:	7E	7E	7E		7E			

Run summary data									
	Raw Avg:	14.54	3.699	4.256		1.628			
	Max:	14.56	3.726	4.341		1.882			
	Min:	14.53	3.663	4.093		1.528			

Cylinder Concentrations									
	Zero:	0.000	0.000	0.000		0.000			
	Mid:	10.93	5.018	5.019		4.999			
	High:	21.04	8.552	9.367		9.937			

Calibration Readings									
	Zero reading:	0.015	0.024	0.028		0.006			
	Mid reading:	11.00	54.965	4.879		5.034			
	High reading:	21.01	8.552	9.361		9.944			

EPA Method 7E Error Calculations									
Zero %Err:	<2.0	0.071	0.281	0.299		0.060			
Mid %Err:	<2.0	0.333	-0.620	-1.495		0.352			
High %Err:	<2.0	-0.143	0.000	-0.064		0.070			

Initial Bias Data									
	Zero reading:	0.012	0.096	0.081		0.067			
	Span reading:	10.75	5.142	4.482		4.952			
Zero % bias:	<5.0	0.057	1.123	0.566		0.614			
Span % bias:	<5.0	-1.188	2.070	-4.238		-0.825			

Final Bias Data									
	Zero reading:	0.012	0.099	-0.082		0.111			
	Span reading:	10.85	5.198	4.549		5.002			
Zero % bias:	<5.0	0.057	1.158	-1.174		1.057			
Span % bias:	<5.0	-0.713	2.725	-3.523		-0.322			
Zero % drift:	<3.0	0.000	0.035	1.740		0.443			
Span % drift:	<3.0	0.475	0.655	0.715		0.503			

Bias Corrected Averages									
	Cor Avg:	14.72	3.562	4.729		1.575			



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 2 Average Results								
19:38:00 - 20:08:01								
	Name:	O2	CO2	NOx		CO		
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i		
Apr 21 2026	19:39:00	14.51	3.696	4.510		1.586		
Apr 21 2026	19:40:00	14.53	3.695	4.515		1.575		
Apr 21 2026	19:41:00	14.51	3.706	4.518		1.592		
Apr 21 2026	19:42:01	14.52	3.694	4.520		1.588		
Apr 21 2026	19:43:00	14.52	3.683	4.532		1.643		
Apr 21 2026	19:44:01	14.51	3.689	4.556		1.665		
Apr 21 2026	19:45:00	14.51	3.693	4.507		1.610		
Apr 21 2026	19:46:00	14.50	3.697	4.535		1.558		
Apr 21 2026	19:47:00	14.51	3.697	4.536		1.511		
Apr 21 2026	19:48:00	14.53	3.688	4.531		1.528		
Apr 21 2026	19:49:00	14.52	3.694	4.559		1.529		
Apr 21 2026	19:50:00	14.54	3.685	4.530		1.629		
Apr 21 2026	19:51:00	14.51	3.694	4.533		1.621		
Apr 21 2026	19:52:01	14.53	3.691	4.523		1.602		
Apr 21 2026	19:53:00	14.50	3.692	4.551		1.593		
Apr 21 2026	19:54:01	14.51	3.684	4.506		1.560		
Apr 21 2026	19:55:00	14.52	3.688	4.534		1.600		
Apr 21 2026	19:56:00	14.52	3.695	4.528		1.619		
Apr 21 2026	19:57:00	14.54	3.690	4.549		1.663		
Apr 21 2026	19:58:00	14.52	3.702	4.557		1.591		
Apr 21 2026	19:59:00	14.51	3.713	4.551		1.641		
Apr 21 2026	20:00:00	14.52	3.706	4.545		1.596		
Apr 21 2026	20:01:01	14.51	3.709	4.542		1.585		
Apr 21 2026	20:02:00	14.52	3.712	4.556		1.601		
Apr 21 2026	20:03:01	14.52	3.724	4.556		1.587		
Apr 21 2026	20:04:00	14.52	3.709	4.562		1.642		
Apr 21 2026	20:05:01	14.51	3.707	4.549		1.617		
Apr 21 2026	20:06:00	14.53	3.708	4.557		1.586		
Apr 21 2026	20:07:00	14.50	3.694	4.563		1.582		
Apr 21 2026	20:08:01	14.51	3.699	4.554		1.578		
	Average:	14.52	3.698	4.539		1.596		
	Max:	14.54	3.724	4.563		1.665		
	Min:	14.50	3.683	4.506		1.511		



MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 2 Post run bias									
19:38:00 - 20:08:01									
	Name:	O2	CO2	NOx		CO			
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i			
	25A or 7E:	7E	7E	7E		7E			

Run summary data									
	Raw Avg:	14.52	3.698	4.539		1.596			
	Max:	14.54	3.724	4.563		1.665			
	Min:	14.50	3.683	4.506		1.511			

Cylinder Concentrations									
	Zero:	0.000	0.000	0.000		0.000			
	Mid:	10.93	5.018	5.019		4.999			
	High:	21.04	8.552	9.367		9.937			

Calibration Readings									
	Zero reading:	0.015	0.024	0.028		0.006			
	Mid reading:	11.00	4.965	4.879		5.034			
	High reading:	21.01	8.552	9.361		9.944			

EPA Method 7E Error Calculations									
Zero %Err:	<2.0	0.071	0.281	0.299		0.060			
Mid %Err:	<2.0	0.333	-0.620	-1.495		0.352			
High %Err:	<2.0	-0.143	0.000	-0.064		0.070			

Initial Bias Data									
	Zero reading:	0.057	0.099	-0.082		0.111			
	Span reading:	10.85	5.198	4.549		5.002			
Zero % bias:	<5.0	-0.014	1.158	-1.174		1.057			
Span % bias:	<5.0	-0.713	2.725	-3.523		-0.322			

Final Bias Data									
	Zero reading:	0.032	0.110	0.018		0.060			
	Span reading:	10.86	5.180	4.786		5.004			
Zero % bias:	<5.0	0.152	1.286	-0.107		0.543			
Span % bias:	<5.0	-0.665	2.514	-0.993		-0.302			
Zero % drift:	<3.0	0.095	0.129	1.067		0.514			
Span % drift:	<3.0	0.048	0.210	2.530		0.020			

Bias Corrected Averages									
	Cor Avg:	14.52	3.698	4.882		1.536			



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 3 Average Results								
20:20:00 - 20:50:00								
	Name:	O2	CO2	NOx		CO		
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i		
Apr 21 2026	20:21:01	14.51	3.751	4.528		1.655		
Apr 21 2026	20:22:00	14.51	3.772	4.525		1.638		
Apr 21 2026	20:23:00	14.52	3.779	4.534		1.645		
Apr 21 2026	20:24:00	14.51	3.790	4.546		1.629		
Apr 21 2026	20:25:00	14.52	3.799	4.533		1.643		
Apr 21 2026	20:26:00	14.50	3.786	4.543		1.622		
Apr 21 2026	20:27:00	14.51	3.851	4.536		1.619		
Apr 21 2026	20:28:00	14.53	3.881	4.532		1.679		
Apr 21 2026	20:29:00	14.51	3.885	4.516		1.607		
Apr 21 2026	20:30:01	14.53	3.883	4.530		1.695		
Apr 21 2026	20:31:00	14.52	3.852	4.526		1.619		
Apr 21 2026	20:32:00	14.51	3.813	4.536		1.653		
Apr 21 2026	20:33:01	14.52	3.800	4.516		1.645		
Apr 21 2026	20:34:00	14.52	3.822	4.530		1.662		
Apr 21 2026	20:35:00	14.52	3.810	4.537		1.691		
Apr 21 2026	20:36:01	14.53	3.786	4.550		1.791		
Apr 21 2026	20:37:01	14.54	3.787	4.549		1.631		
Apr 21 2026	20:38:00	14.52	3.826	4.569		1.623		
Apr 21 2026	20:39:00	14.52	3.841	4.600		1.535		
Apr 21 2026	20:40:00	14.52	3.843	4.601		1.553		
Apr 21 2026	20:41:01	14.52	3.857	4.636		1.596		
Apr 21 2026	20:42:01	14.51	3.892	4.641		1.764		
Apr 21 2026	20:43:00	14.52	3.879	4.577		1.844		
Apr 21 2026	20:44:00	14.51	3.840	4.541		1.625		
Apr 21 2026	20:45:00	14.52	3.853	4.544		1.660		
Apr 21 2026	20:46:00	14.52	3.873	4.509		1.686		
Apr 21 2026	20:47:01	14.53	3.881	4.523		1.677		
Apr 21 2026	20:48:00	14.51	3.871	4.579		1.697		
Apr 21 2026	20:49:01	14.51	3.876	4.586		1.642		
Apr 21 2026	20:50:00	14.51	3.874	4.599		1.647		
	Average:	14.52	3.835	4.552		1.656		
	Max:	14.54	3.892	4.641		1.844		
	Min:	14.50	3.751	4.509		1.535		



MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 3 Post run bias									
20:20:00 - 20:50:00									
	Name:	O2	CO2	NOx		CO			
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i			
	25A or 7E:	7E	7E	7E		7E			

Run summary data									
	Raw Avg:	14.52	3.835	4.552		1.656			
	Max:	14.54	3.892	4.641		1.844			
	Min:	14.50	3.751	4.509		1.535			

Cylinder Concentrations									
	Zero:	0.000	0.000	0.000		0.000			
	Mid:	10.93	5.018	5.019		4.999			
	High:	21.04	8.552	9.367		9.937			

Calibration Readings									
	Zero reading:	0.015	0.024	0.028		0.006			
	Mid reading:	11.00	5.197	4.879		5.034			
	High reading:	21.01	8.552	9.361		9.944			

EPA Method 7E Error Calculations									
Zero %Err:	<2.0	0.071	0.281	0.299		0.060			
Mid %Err:	<2.0	0.333	-0.620	-1.495		0.352			
High %Err:	<2.0	-0.143	0.000	-0.064		0.070			

Initial Bias Data									
	Zero reading:	0.032	0.110	0.018		0.060			
	Span reading:	10.86	5.180	4.786		5.004			
Zero % bias:	<5.0	0.152	1.286	-0.107		0.543			
Span % bias:	<5.0	-0.665	2.514	-0.993		-0.302			

Final Bias Data									
	Zero reading:	0.016	0.291	0.039		0.172			
	Span reading:	10.86	5.430	4.762		4.965			
Zero % bias:	<5.0	0.076	3.403	0.117		1.671			
Span % bias:	<5.0	-0.665	3.437	-1.249		-0.694			
Zero % drift:	<3.0	0.076	2.116	0.224		1.128			
Span % drift:	<3.0	0.000	2.924	0.256		0.392			

Bias Corrected Averages									
	Cor Avg:	14.62	3.573	4.784		1.580			



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 4 Average Results								
21:10:00 - 21:40:00								
	Name:	O2	CO2	NOx		CO		
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i		
Apr 21 2026	21:11:01	14.76	3.702	4.414		3.463		
Apr 21 2026	21:12:00	14.77	3.692	4.380		3.514		
Apr 21 2026	21:13:00	14.77	3.713	4.416		3.502		
Apr 21 2026	21:14:00	14.77	3.696	4.325		3.551		
Apr 21 2026	21:15:00	14.77	3.636	4.505		3.502		
Apr 21 2026	21:16:01	14.76	3.625	4.365		3.608		
Apr 21 2026	21:17:00	14.78	3.632	4.245		3.663		
Apr 21 2026	21:18:00	14.77	3.636	4.371		3.979		
Apr 21 2026	21:19:01	14.79	3.635	4.268		3.827		
Apr 21 2026	21:20:00	14.77	3.640	4.349		3.845		
Apr 21 2026	21:21:00	14.77	3.646	4.381		3.669		
Apr 21 2026	21:22:00	14.77	3.644	4.450		3.690		
Apr 21 2026	21:23:00	14.76	3.652	4.397		3.688		
Apr 21 2026	21:24:00	14.79	3.638	4.282		3.846		
Apr 21 2026	21:25:00	14.77	3.637	4.462		3.807		
Apr 21 2026	21:26:00	14.77	3.645	4.441		3.452		
Apr 21 2026	21:27:01	14.73	3.654	4.412		3.868		
Apr 21 2026	21:28:01	14.75	3.638	4.256		3.524		
Apr 21 2026	21:29:00	14.77	3.638	4.397		3.904		
Apr 21 2026	21:30:00	14.75	3.648	4.322		3.661		
Apr 21 2026	21:31:00	14.76	3.641	4.301		3.802		
Apr 21 2026	21:32:00	14.77	3.631	4.392		3.887		
Apr 21 2026	21:33:00	14.75	3.625	4.387		3.782		
Apr 21 2026	21:34:00	14.76	3.630	4.395		3.816		
Apr 21 2026	21:35:01	14.75	3.645	4.391		3.644		
Apr 21 2026	21:36:01	14.75	3.631	4.332		3.679		
Apr 21 2026	21:37:00	14.76	3.626	4.391		3.780		
Apr 21 2026	21:38:01	14.77	3.633	4.324		3.556		
Apr 21 2026	21:39:00	14.76	3.629	4.421		3.976		
Apr 21 2026	21:40:00	14.76	3.615	4.380		3.785		
	Average:	14.76	3.645	4.372		3.709		
	Max:	14.79	3.713	4.505		3.979		
	Min:	14.73	3.615	4.245		3.452		



MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 4 Post run bias									
21:10:00 - 21:40:00									
	Name:	O2	CO2	NOx		CO			
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i			
	25A or 7E:	7E	7E	7E		7E			

Run summary data									
	Raw Avg:	14.76	3.645	4.372		3.709			
	Max:	14.79	3.713	4.505		3.979			
	Min:	14.73	3.615	4.245		3.452			

Cylinder Concentrations									
	Zero:	0.000	0.000	0.000		0.000			
	Mid:	10.93	5.018	5.019		4.999			
	High:	21.04	8.552	9.367		9.937			

Calibration Readings									
	Zero reading:	0.015	0.024	0.028		0.006			
	Mid reading:	11.00	5.197	4.879		5.034			
	High reading:	21.01	8.552	9.361		9.944			

EPA Method 7E Error Calculations									
Zero %Err:	<2.0	-0.143	0.281	0.299		0.060			
Mid %Err:	<2.0	0.333	-0.620	-1.495		0.352			
High %Err:	<2.0	-0.143	0.000	-0.064		0.070			

Initial Bias Data									
	Zero reading:	0.016	0.291	0.039		0.172			
	Span reading:	10.86	5.430	4.762		4.965			
Zero % bias:	<5.0	0.076	3.403	0.117		1.671			
Span % bias:	<5.0	-0.665	2.437	-1.249		-0.694			

Final Bias Data									
	Zero reading:	0.037	0.174	0.035		0.076			
	Span reading:	10.91	5.197	4.783		4.973			
Zero % bias:	<5.0	0.176	2.035	0.075		0.704			
Span % bias:	<5.0	-0.428	2.713	-1.025		-0.614			
Zero % drift:	<3.0	0.100	1.368	0.042		0.967			
Span % drift:	<3.0	0.238	2.725	0.224		0.080			

Bias Corrected Averages									
	Cor Avg:	14.83	3.370	4.595		3.699			



MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 5 Average Results								
21:55:00 - 22:25:01								
	Name:	O2	CO2	NOx		CO		
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i		
Apr 21 2026	21:56:00	14.76	3.570	4.356		4.132		
Apr 21 2026	21:57:01	14.77	3.573	4.277		4.048		
Apr 21 2026	21:58:01	14.75	3.585	4.312		3.936		
Apr 21 2026	21:59:01	14.75	3.581	4.256		4.291		
Apr 21 2026	22:00:00	14.77	3.598	4.351		4.369		
Apr 21 2026	22:01:00	14.77	3.593	4.358		4.094		
Apr 21 2026	22:02:00	14.78	3.587	4.411		4.657		
Apr 21 2026	22:03:01	14.79	3.595	4.424		4.392		
Apr 21 2026	22:04:00	14.76	3.598	4.407		3.943		
Apr 21 2026	22:05:00	14.77	3.568	4.336		4.092		
Apr 21 2026	22:06:00	14.78	3.570	4.412		4.347		
Apr 21 2026	22:07:01	14.79	3.578	4.404		4.297		
Apr 21 2026	22:08:00	14.76	3.568	4.357		4.124		
Apr 21 2026	22:09:00	14.78	3.565	4.295		3.988		
Apr 21 2026	22:10:00	14.78	3.567	4.345		4.194		
Apr 21 2026	22:11:00	14.79	3.554	4.265		4.308		
Apr 21 2026	22:12:00	14.79	3.550	4.422		4.213		
Apr 21 2026	22:13:01	14.79	3.566	4.415		4.098		
Apr 21 2026	22:14:01	14.77	3.558	4.409		4.267		
Apr 21 2026	22:15:00	14.79	3.562	4.350		4.342		
Apr 21 2026	22:16:01	14.79	3.558	4.339		4.486		
Apr 21 2026	22:17:00	14.79	3.566	4.353		4.706		
Apr 21 2026	22:18:00	14.82	3.562	4.363		4.601		
Apr 21 2026	22:19:00	14.80	3.554	4.365		4.493		
Apr 21 2026	22:20:00	14.77	3.569	4.385		4.139		
Apr 21 2026	22:21:00	14.79	3.572	4.305		4.266		
Apr 21 2026	22:22:00	14.79	3.562	4.343		4.587		
Apr 21 2026	22:23:00	14.80	3.566	4.343		4.566		
Apr 21 2026	22:24:01	14.79	3.569	4.441		4.400		
Apr 21 2026	22:25:01	14.78	3.573	4.485		4.430		
	Average:	14.78	3.571	4.363		4.294		
	Max:	14.82	3.598	4.485		4.706		
	Min:	14.75	3.550	4.256		3.936		



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 5 Post run bias									
21:55:00 - 22:25:01									
	Name:	O2	CO2	NOx		CO			
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i			
	25A or 7E:	7E	7E	7E		7E			

Run summary data									
	Raw Avg:	14.78	3.571	4.363		4.294			
	Max:	14.82	3.598	4.485		4.706			
	Min:	14.75	3.550	4.256		3.936			

Cylinder Concentrations									
	Zero:	0.000	0.000	0.000		0.000			
	Mid:	10.93	5.018	5.019		4.999			
	High:	21.04	8.552	9.367		9.937			

Calibration Readings									
	Zero reading:	0.015	0.024	0.028		0.006			
	Mid reading:	11.00	4.965	4.879		5.034			
	High reading:	21.01	8.552	9.361		9.944			

EPA Method 7E Error Calculations									
Zero %Err:	<2.0	0.071	0.281	0.299		0.060			
Mid %Err:	<2.0	0.333	-0.620	-1.495		0.352			
High %Err:	<2.0	-0.143	0.000	-0.064		0.070			

Initial Bias Data									
	Zero reading:	0.037	0.174	0.035		0.076			
	Span reading:	10.91	5.197	4.783		4.973			
Zero % bias:	<5.0	0.176	2.035	0.075		0.704			
Span % bias:	<5.0	-0.428	2.713	-1.025		-0.614			

Final Bias Data									
	Zero reading:	0.017	0.087	0.028		0.085			
	Span reading:	10.91	5.186	4.772		5.021			
Zero % bias:	<5.0	0.081	1.017	0.000		0.795			
Span % bias:	<5.0	-0.428	2.584	-1.142		-0.131			
Zero % drift:	<3.0	0.095	1.017	0.075		0.091			
Span % drift:	<3.0	0.000	0.129	0.117		0.483			

Bias Corrected Averages									
	Cor Avg:	14.82	3.411	4.581		4.284			



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 6 Average Results								
22:37:00 - 23:07:00								
	Name:	O2	CO2	NOx		CO		
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i		
Apr 21 2026	22:38:00	14.81	3.539	4.363		5.103		
Apr 21 2026	22:39:00	14.81	3.539	4.345		4.856		
Apr 21 2026	22:40:00	14.81	3.544	4.306		4.681		
Apr 21 2026	22:41:00	14.79	3.548	4.387		4.875		
Apr 21 2026	22:42:01	14.82	3.556	4.408		4.773		
Apr 21 2026	22:43:01	14.81	3.540	4.386		4.728		
Apr 21 2026	22:44:01	14.82	3.544	4.314		5.137		
Apr 21 2026	22:45:00	14.81	3.546	4.457		5.225		
Apr 21 2026	22:46:01	14.82	3.539	4.405		4.898		
Apr 21 2026	22:47:00	14.82	3.548	4.352		5.123		
Apr 21 2026	22:48:00	14.81	3.562	4.413		5.231		
Apr 21 2026	22:49:00	14.83	3.551	4.302		5.175		
Apr 21 2026	22:50:00	14.82	3.550	4.292		5.285		
Apr 21 2026	22:51:00	14.83	3.540	4.301		5.639		
Apr 21 2026	22:52:01	14.84	3.550	4.300		5.336		
Apr 21 2026	22:53:00	14.82	3.541	4.284		5.965		
Apr 21 2026	22:54:01	14.84	3.551	4.333		5.425		
Apr 21 2026	22:55:00	14.82	3.548	4.277		5.683		
Apr 21 2026	22:56:00	14.84	3.544	4.323		5.726		
Apr 21 2026	22:57:00	14.84	3.541	4.243		5.827		
Apr 21 2026	22:58:01	14.82	3.537	4.318		5.867		
Apr 21 2026	22:59:00	14.84	3.546	4.301		6.016		
Apr 21 2026	23:00:00	14.82	3.551	4.369		5.568		
Apr 21 2026	23:01:00	14.82	3.556	4.365		5.317		
Apr 21 2026	23:02:00	14.82	3.550	4.367		5.462		
Apr 21 2026	23:03:00	14.84	3.548	4.273		5.436		
Apr 21 2026	23:04:00	14.82	3.532	4.342		5.347		
Apr 21 2026	23:05:00	14.84	3.537	4.316		5.720		
Apr 21 2026	23:06:00	14.84	3.549	4.349		5.603		
Apr 21 2026	23:07:00	14.82	3.541	4.331		5.374		
	Average:	14.82	3.546	4.337		5.347		
	Max:	14.84	3.562	4.457		6.016		
	Min:	14.79	3.532	4.243		4.681		



MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 6 Post run bias									
22:37:00 - 23:07:00									
	Name:	O2	CO2	NOx		CO			
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i			
	25A or 7E:	7E	7E	7E		7E			

Run summary data									
	Raw Avg:	14.82	3.546	4.337		5.347			
	Max:	14.84	3.562	4.457		6.016			
	Min:	14.79	3.532	4.243		4.681			

Cylinder Concentrations									
	Zero:	0.000	0.000	0.000		0.000			
	Mid:	10.93	5.018	5.019		4.999			
	High:	21.04	8.552	9.367		9.937			

Calibration Readings									
	Zero reading:	0.015	0.024	0.028		0.006			
	Mid reading:	11.00	4.965	4.879		5.034			
	High reading:	21.01	8.552	9.361		9.944			

EPA Method 7E Error Calculations									
Zero %Err:	<2.0	0.071	0.281	0.299		0.060			
Mid %Err:	<2.0	0.333	-0.620	-1.495		0.352			
High %Err:	<2.0	-0.143	0.000	-0.064		0.070			

Initial Bias Data									
	Zero reading:	0.017	0.087	0.028		0.085			
	Span reading:	10.91	5.186	4.772		5.021			
Zero % bias:	<5.0	0.081	1.017	0.000		0.795			
Span % bias:	<5.0	-0.428	2.584	-1.142		-0.131			

Final Bias Data									
	Zero reading:	0.005	0.125	0.042		0.058			
	Span reading:	10.83	5.192	4.792		5.000			
Zero % bias:	<5.0	0.024	1.462	0.150		0.523			
Span % bias:	<5.0	-0.808	2.654	-0.929		-0.342			
Zero % drift:	<3.0	0.057	0.444	0.149		0.272			
Span % drift:	<3.0	0.380	0.070	0.213		0.211			

Bias Corrected Averages									
	Cor Avg:	14.96	3.546	4.549		5.339			



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 7 Average Results								
23:18:00 - 23:48:00								
	Name:	O2	CO2	NOx		CO		
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i		
Apr 21 2026	23:19:00	14.82	3.510	4.284		5.993		
Apr 21 2026	23:20:00	14.83	3.513	4.246		5.840		
Apr 21 2026	23:21:00	14.81	3.517	4.270		6.022		
Apr 21 2026	23:22:00	14.83	3.515	4.328		5.433		
Apr 21 2026	23:23:01	14.83	3.515	4.314		5.629		
Apr 21 2026	23:24:00	14.84	3.512	4.238		5.289		
Apr 21 2026	23:25:00	14.81	3.515	4.384		5.321		
Apr 21 2026	23:26:01	14.81	3.512	4.333		5.160		
Apr 21 2026	23:27:00	14.82	3.518	4.412		5.883		
Apr 21 2026	23:28:01	14.84	3.518	4.221		5.522		
Apr 21 2026	23:29:00	14.85	3.510	4.336		5.875		
Apr 21 2026	23:30:00	14.81	3.523	4.369		5.786		
Apr 21 2026	23:31:00	14.82	3.518	4.281		5.571		
Apr 21 2026	23:32:00	14.84	3.504	4.303		5.997		
Apr 21 2026	23:33:00	14.83	3.518	4.411		6.204		
Apr 21 2026	23:34:00	14.84	3.522	4.327		6.063		
Apr 21 2026	23:35:00	14.82	3.525	4.340		5.376		
Apr 21 2026	23:36:00	14.84	3.516	4.370		6.123		
Apr 21 2026	23:37:00	14.84	3.517	4.359		5.827		
Apr 21 2026	23:38:00	14.82	3.525	4.441		5.859		
Apr 21 2026	23:39:00	14.82	3.527	4.381		5.652		
Apr 21 2026	23:40:00	14.81	3.537	4.440		5.927		
Apr 21 2026	23:41:01	14.80	3.526	4.432		5.355		
Apr 21 2026	23:42:00	14.80	3.543	4.373		5.082		
Apr 21 2026	23:43:00	14.80	3.537	4.354		5.321		
Apr 21 2026	23:44:01	14.81	3.539	4.358		5.318		
Apr 21 2026	23:45:00	14.80	3.536	4.284		5.303		
Apr 21 2026	23:46:00	14.81	3.524	4.319		5.163		
Apr 21 2026	23:47:00	14.83	3.527	4.301		5.406		
Apr 21 2026	23:48:00	14.80	3.526	4.389		5.395		
	Average:	14.82	3.522	4.340		5.623		
	Max:	14.85	3.543	4.441		6.204		
	Min:	14.80	3.504	4.221		5.082		



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 7 Post run bias									
23:18:00 - 23:48:00									
	Name:	O2	CO2	NOx		CO			
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i			
	25A or 7E:	7E	7E	7E		7E			

Run summary data									
	Raw Avg:	14.82	3.522	4.340		5.623			
	Max:	14.85	3.543	4.441		6.204			
	Min:	14.80	3.504	4.221		5.082			

Cylinder Concentrations									
	Zero:	0.000	0.000	0.000		0.000			
	Mid:	10.93	5.018	5.019		4.999			
	High:	21.04	8.552	9.367		9.937			

Calibration Readings									
	Zero reading:	0.015	0.024	0.028		0.006			
	Mid reading:	11.00	5.197	4.879		5.034			
	High reading:	21.01	8.552	9.361		9.944			

EPA Method 7E Error Calculations									
Zero %Err:	<2.0	0.071	0.281	0.299		0.060			
Mid %Err:	<2.0	0.333	-0.620	-1.495		0.352			
High %Err:	<2.0	-0.143	0.000	-0.064		0.070			

Initial Bias Data									
	Zero reading:	0.005	0.125	0.042		0.058			
	Span reading:	10.83	5.192	4.792		5.000			
Zero % bias:	<5.0	0.024	1.462	0.150		0.523			
Span % bias:	<5.0	-0.808	2.654	-0.929		-0.342			

Final Bias Data									
	Zero reading:	0.028	0.064	0.042		0.069			
	Span reading:	10.87	5.184	4.833		5.002			
Zero % bias:	<5.0	0.133	0.748	0.150		0.634			
Span % bias:	<5.0	-0.618	2.561	-0.491		-0.322			
Zero % drift:	<3.0	0.110	0.713	0.000		0.111			
Span % drift:	<3.0	0.190	0.094	0.438		0.020			

Bias Corrected Averages									
	Cor Avg:	14.99	3.377	4.521		5.630			



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 8 Average Results								
23:59:02 - 00:29:02								
	Name:	O2	CO2	NOx		CO		
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i		
Apr 22 2026	00:00:02	14.81	3.539	4.225		5.544		
Apr 22 2026	00:01:02	14.84	3.526	4.247		6.003		
Apr 22 2026	00:02:02	14.82	3.531	4.257		5.878		
Apr 22 2026	00:03:02	14.83	3.542	4.296		5.911		
Apr 22 2026	00:04:02	14.82	3.536	4.320		5.592		
Apr 22 2026	00:05:02	14.81	3.509	4.304		5.350		
Apr 22 2026	00:06:02	14.82	3.520	4.310		5.446		
Apr 22 2026	00:07:03	14.84	3.527	4.337		5.574		
Apr 22 2026	00:08:02	14.83	3.513	4.305		5.931		
Apr 22 2026	00:09:03	14.84	3.516	4.320		5.497		
Apr 22 2026	00:10:02	14.85	3.509	4.290		6.005		
Apr 22 2026	00:11:02	14.85	3.506	4.306		5.583		
Apr 22 2026	00:12:02	14.83	3.494	4.347		5.792		
Apr 22 2026	00:13:02	14.83	3.505	4.404		5.557		
Apr 22 2026	00:14:02	14.83	3.502	4.373		5.471		
Apr 22 2026	00:15:02	14.86	3.496	4.279		5.665		
Apr 22 2026	00:16:03	14.86	3.496	4.303		5.864		
Apr 22 2026	00:17:02	14.84	3.516	4.444		5.854		
Apr 22 2026	00:18:02	14.86	3.500	4.348		5.966		
Apr 22 2026	00:19:02	14.87	3.486	4.210		6.149		
Apr 22 2026	00:20:02	14.85	3.499	4.335		5.927		
Apr 22 2026	00:21:02	14.85	3.483	4.271		6.407		
Apr 22 2026	00:22:02	14.83	3.491	4.348		5.927		
Apr 22 2026	00:23:02	14.84	3.493	4.260		5.940		
Apr 22 2026	00:24:02	14.86	3.494	4.318		6.496		
Apr 22 2026	00:25:02	14.85	3.491	4.325		6.574		
Apr 22 2026	00:26:03	14.86	3.489	4.318		5.993		
Apr 22 2026	00:27:02	14.86	3.486	4.302		6.109		
Apr 22 2026	00:28:03	14.86	3.487	4.277		6.092		
Apr 22 2026	00:29:02	14.85	3.485	4.410		6.429		
	Average:	14.84	3.506	4.313		5.884		
	Max:	14.87	3.542	4.444		6.574		
	Min:	14.81	3.483	4.210		5.350		



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 8 Post run bias									
23:59:02 - 00:29:02									
	Name:	O2	CO2	NOx		CO			
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i			
	25A or 7E:	7E	7E	7E		7E			

Run summary data									
	Raw Avg:	14.84	3.506	4.313		5.884			
	Max:	14.87	3.542	4.444		6.574			
	Min:	14.81	3.483	4.210		5.350			

Cylinder Concentrations									
	Zero:	0.000	0.000	0.000		0.000			
	Mid:	10.93	5.018	5.019		4.999			
	High:	21.04	8.552	9.367		9.937			

Calibration Readings									
	Zero reading:	0.015	0.024	0.028		0.006			
	Mid reading:	11.00	5.197	4.879		5.034			
	High reading:	21.01	8.552	9.361		9.944			

EPA Method 7E Error Calculations									
Zero %Err:	<2.0	0.071	0.281	0.299		0.060			
Mid %Err:	<2.0	0.333	-0.620	-1.495		0.352			
High %Err:	<2.0	-0.143	0.000	-0.064		0.070			

Initial Bias Data									
	Zero reading:	0.028	0.064	0.042		0.069			
	Span reading:	10.87	5.184	4.833		5.002			
Zero % bias:	<5.0	0.133	0.748	0.150		0.634			
Span % bias:	<5.0	-0.618	2.561	-0.491		-0.322			

Final Bias Data									
	Zero reading:	0.006	0.048	0.010		0.069			
	Span reading:	10.88	5.128	4.870		5.037			
Zero % bias:	<5.0	0.029	0.561	-0.192		0.634			
Span % bias:	<5.0	-0.570	1.906	-0.096		0.030			
Zero % drift:	<3.0	0.105	0.187	0.341		0.000			
Span % drift:	<3.0	0.048	0.655	0.395		0.352			

Bias Corrected Averages									
	Cor Avg:	14.98	3.395	4.458		5.871			



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 9 Average Results								
00:39:01 - 01:09:01								
	Name:	O2	CO2	NOx		CO		
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i		
Apr 22 2026	00:40:01	14.85	3.401	4.308		6.410		
Apr 22 2026	00:41:01	14.89	3.384	4.249		6.446		
Apr 22 2026	00:42:01	14.83	3.412	4.338		6.299		
Apr 22 2026	00:43:01	14.85	3.416	4.302		5.966		
Apr 22 2026	00:44:01	14.85	3.413	4.323		6.050		
Apr 22 2026	00:45:01	14.86	3.413	4.233		6.424		
Apr 22 2026	00:46:01	14.86	3.418	4.337		6.901		
Apr 22 2026	00:47:01	14.86	3.392	4.177		7.579		
Apr 22 2026	00:48:01	14.88	3.411	4.320		7.487		
Apr 22 2026	00:49:02	14.85	3.414	4.283		6.941		
Apr 22 2026	00:50:01	14.87	3.418	4.304		8.025		
Apr 22 2026	00:51:02	14.87	3.414	4.291		7.313		
Apr 22 2026	00:52:01	14.86	3.429	4.335		7.380		
Apr 22 2026	00:53:01	14.87	3.431	4.381		7.465		
Apr 22 2026	00:54:01	14.87	3.425	4.291		7.169		
Apr 22 2026	00:55:01	14.86	3.421	4.406		6.816		
Apr 22 2026	00:56:01	14.86	3.432	4.460		6.031		
Apr 22 2026	00:57:02	14.86	3.425	4.380		6.517		
Apr 22 2026	00:58:01	14.88	3.415	4.306		7.083		
Apr 22 2026	00:59:01	14.87	3.414	4.315		6.549		
Apr 22 2026	01:00:01	14.87	3.422	4.326		6.348		
Apr 22 2026	01:01:01	14.88	3.403	4.277		7.403		
Apr 22 2026	01:02:01	14.87	3.417	4.292		7.187		
Apr 22 2026	01:03:01	14.88	3.413	4.239		7.319		
Apr 22 2026	01:04:01	14.88	3.421	4.366		7.039		
Apr 22 2026	01:05:01	14.86	3.425	4.400		6.892		
Apr 22 2026	01:06:01	14.88	3.430	4.346		6.482		
Apr 22 2026	01:07:01	14.86	3.423	4.267		6.426		
Apr 22 2026	01:08:01	14.87	3.421	4.361		6.809		
Apr 22 2026	01:09:01	14.86	3.427	4.337		6.500		
	Average:	14.87	3.417	4.318		6.842		
	Max:	14.89	3.432	4.460		8.025		
	Min:	14.83	3.384	4.177		5.966		



MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 9 Post run bias									
00:39:01 - 01:09:01									
	Name:	O2	CO2	NOx		CO			
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i			
	25A or 7E:	7E	7E	7E		7E			

Run summary data									
	Raw Avg:	14.87	3.417	4.318		6.842			
	Max:	14.89	3.432	4.460		8.025			
	Min:	14.83	3.384	4.177		5.966			

Cylinder Concentrations									
	Zero:	0.000	0.000	0.000		0.000			
	Mid:	10.93	5.018	5.019		4.999			
	High:	21.04	8.552	9.367		9.937			

Calibration Readings									
	Zero reading:	0.015	0.024	0.028		0.006			
	Mid reading:	11.00	4.965	4.879		5.034			
	High reading:	21.01	8.552	9.361		9.944			

EPA Method 7E Error Calculations									
Zero %Err:	<2.0	0.071	0.281	0.299		0.060			
Mid %Err:	<2.0	0.333	-620	-1.495		0.352			
High %Err:	<2.0	-0.143	0.000	-0.064		0.070			

Initial Bias Data									
	Zero reading:	0.006	0.048	0.010		0.069			
	Span reading:	10.88	5.128	4.870		5.037			
Zero % bias:	<5.0	0.029	0.561	-0.192		0.634			
Span % bias:	<5.0	-0.570	1.906	-0.096		0.030			

Final Bias Data									
	Zero reading:	0.012	0.033	0.057		0.053			
	Span reading:	10.91	5.081	4.838		5.059			
Zero % bias:	<5.0	0.057	0.386	0.310		0.473			
Span % bias:	<5.0	-0.428	1.356	-0.438		0.252			
Zero % drift:	<3.0	0.029	0.176	0.502		0.161			
Span % drift:	<3.0	0.142	0.550	0.342		0.222			

Bias Corrected Averages									
	Cor Avg:	14.98	3.346	4.460		6.796			



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 10 Average Results

01:38:00 - 02:08:00

	Name:	O2	CO2	NOx		CO			
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i			
Apr 22 2026	01:39:00	14.84	3.496	4.323		6.420			
Apr 22 2026	01:40:00	14.85	3.498	4.390		6.500			
Apr 22 2026	01:41:00	14.88	3.505	4.301		6.227			
Apr 22 2026	01:42:00	14.84	3.500	4.316		6.555			
Apr 22 2026	01:43:01	14.87	3.484	4.227		6.245			
Apr 22 2026	01:44:00	14.87	3.523	4.242		6.311			
Apr 22 2026	01:45:00	14.84	3.567	4.404		6.589			
Apr 22 2026	01:46:00	14.85	3.561	4.281		5.831			
Apr 22 2026	01:47:00	14.87	3.547	4.145		6.803			
Apr 22 2026	01:48:00	14.86	3.554	4.289		6.885			
Apr 22 2026	01:49:00	14.87	3.556	4.314		5.888			
Apr 22 2026	01:50:01	14.87	3.567	4.354		6.576			
Apr 22 2026	01:51:00	14.89	3.554	4.245		6.631			
Apr 22 2026	01:52:00	14.90	3.571	4.298		6.891			
Apr 22 2026	01:53:00	14.88	3.566	4.295		6.908			
Apr 22 2026	01:54:00	14.87	3.562	4.325		6.423			
Apr 22 2026	01:55:01	14.87	3.563	4.347		6.791			
Apr 22 2026	01:56:00	14.87	3.577	4.367		6.764			
Apr 22 2026	01:57:01	14.85	3.566	4.318		6.418			
Apr 22 2026	01:58:00	14.86	3.570	4.395		6.462			
Apr 22 2026	01:59:00	14.87	3.584	4.352		5.754			
Apr 22 2026	02:00:00	14.86	3.570	4.329		6.281			
Apr 22 2026	02:01:00	14.87	3.569	4.386		5.828			
Apr 22 2026	02:02:00	14.87	3.564	4.373		6.352			
Apr 22 2026	02:03:01	14.87	3.558	4.362		6.749			
Apr 22 2026	02:04:00	14.87	3.564	4.373		6.909			
Apr 22 2026	02:05:00	14.87	3.564	4.372		6.616			
Apr 22 2026	02:06:00	14.87	3.560	4.351		6.239			
Apr 22 2026	02:07:00	14.88	3.575	4.354		6.480			
Apr 22 2026	02:08:00	14.87	3.564	4.382		6.345			
	Average:	14.87	3.552	4.327		6.456			
	Max:	14.90	3.584	4.404		6.909			
	Min:	14.84	3.484	4.145		5.754			



6/19

MAQDAQ 0.90 Beta			
Project Name: Midway Sunset Cogeneration	Project Number: Proj-066225	CEMS Operator: JP	Unit/Condition: Unit A
Run Length: 30	Record Interval: 6	Average Interval: 60	Triplicate Sampling: False
Traverse: False	Ports: N/A	Points per port: N/A	DAQ Device: DT9803(00)

Run 10 Post run bias									
01:38:00 - 02:08:00									
	Name:	O2	CO2	NOx		CO			
	Make/Model:	CAI 700	CAI 700	CAI 700		TECO 48i			
	25A or 7E:	7E	7E	7E		7E			

Run summary data									
	Raw Avg:	14.87	3.552	4.327		6.456			
	Max:	14.90	3.584	4.404		6.909			
	Min:	14.84	3.484	4.145		5.754			

Cylinder Concentrations									
	Zero:	0.000	0.000	0.000		0.000			
	Mid:	10.93	5.018	5.019		4.999			
	High:	21.04	8.552	9.367		9.937			

Calibration Readings									
	Zero reading:	0.015	0.024	0.028		0.006			
	Mid reading:	11.00	4.965	4.879		5.034			
	High reading:	21.01	8.552	9.361		9.944			

EPA Method 7E Error Calculations									
Zero %Err:	<2.0	0.071	0.281	0.299		0.060			
Mid %Err:	<2.0	0.333	-0.620	-1.495		0.352			
High %Err:	<2.0	-0.143	0.000	-0.064		0.070			

Initial Bias Data									
	Zero reading:	0.012	0.033	0.057		0.053			
	Span reading:	10.91	5.081	4.838		5.059			
Zero % bias:	<5.0	0.057	0.386	0.310		0.473			
Span % bias:	<5.0	-0.428	1.356	-0.438		0.252			

Final Bias Data									
	Zero reading:	0.023	0.166	0.037		0.091			
	Span reading:	10.92	5.281	4.860		5.032			
Zero % bias:	<5.0	0.109	1.941	0.096		0.855			
Span % bias:	<5.0	-0.380	3.695	-0.203		-0.020			
Zero % drift:	<3.0	0.052	1.555	0.214		0.382			
Span % drift:	<3.0	0.048	2.338	0.235		0.272			

Bias Corrected Averages									
	Cor Avg:	14.87	3.552	4.472		6.417			



Appendix A.3

Emission Calculations/Results

COMPLIANCE DETERMINATION
Midway Sunset Cogeneration
Unit A

Test No.	Run 1	Run 2	Run 3	Average
Date	4/21/26	4/21/26	4/21/26	--
Start Time	1855-1925	1938-2008	2020-2050	--
Reference temperature, °F	68.0	68.0	68.0	68.0
Unit load, MW	83.4	83.6	84.0	83.7
Unit fuel flow @ 60 °F, scfh	905,353	907,153	910,010	907,505
"F _d " factor @ 68 °F, dscf/MMBtu	8,624	8,624	8,624	8,624
"F _d " factor @ T _{ref} °F, dscf/MMBtu	8,624	8,624	8,624	8,624
HHV @ 60 °F, btu/scf	1,025	1,025	1,025	1,025
Stack flow rate - based on fuel, dscfm	451,040	437,769	446,141	444,983
O ₂ , % volume dry	14.72	14.52	14.62	14.6
CO ₂ , % volume dry	3.56	3.70	3.57	3.61
CO, ppm volume dry	1.58	1.54	1.58	1.56
CO, ppm dry @ 15% O ₂	1.50	1.42	1.48	1.47
CO, lb/hr	3.10	2.93	3.07	3.04
CO, lb/MMBtu	0.003	0.003	0.003	0.003
NO _x , ppm volume dry	4.73	4.88	4.78	4.80
NO _x , ppm dry @ 15% O ₂	4.51	4.51	4.49	4.51
NO _x , lb/hr as NO ₂	15.28	15.31	15.29	15.29
NO _x , lb/MMBtu as NO ₂	0.016	0.016	0.016	0.016
VOC, ppm volume dry	<0.50	<0.50	<0.50	<0.50
VOC, ppm @ 15% O ₂	<0.48	<0.46	<0.47	<0.47
VOC, lb/hr as CH ₄	<0.56	<0.55	<0.56	<0.56
VOC, lb/MMBtu as CH ₄	<0.001	<0.001	<0.001	<0.001
SO ₂ , gr/100 scf	0.030	0.030	0.030	0.030
SO ₂ , ppm volume dry	0.02	0.02	0.02	0.02
SO ₂ , ppm dry @ 15% O ₂	0.02	0.02	0.02	0.02
SO ₂ , lb/hr	0.08	0.08	0.08	0.08
SO ₂ , lb/MMBtu	0.0001	0.0001	0.0001	0.0001

Gas Turbine Efficiency Calculations Gas Components

Client: Midway Sunset Cogeneration
Source: Unit A

Date: 4/21/2026

Parameter	Run 1	Run 2	Run 3	Average
HHV	1,025	1,025	1,025	1,025
Unit Fuel Flow, scfh	905,353	907,153	910,010	907,505
Gas Turbine Efficiency (EFF ₁)	30.7	30.7	30.7	30.7
Mega Watts (MW)	83.4	83.6	84.0	83.7

Equations: $EFF_1 = 3412 \text{ Btu/kwh} / (\text{Btu/ft}^3 \times \text{scfh} / (\text{MW} \times 1000)) \times 100$



Appendix A.4

RATA Calculations/Results

RELATIVE ACCURACY TEST AUDIT DETERMINATION **Midway Sunset Cogeneration** **Unit A**

Test No.	Run 1	Run 2	Run 3	Run 4	Run 5	Run 6	Run 7	Run 8	Run 9	Run 10	Average
Date	4/21/26	4/21/26	4/21/26	4/21/26	4/21/26	4/21/26	4/21/26	4/22/26	4/22/26	4/22/26	Runs 1-10
Start Time	1855-1925	1938-2008	2020-2050	2110-2140	2155-2225	2237-2307	2318-2348	2359-0029	0039-0109	0138-0208	--
Reference temperature, °F	68.00	68.00	68.00	68.00	68.00	68.00	68.00	68.00	68.00	68.00	68.00
Unit load, MW	83.4	83.6	84.0	75.5	75.5	75.5	75.5	75.5	75.5	75.5	77.9
Unit fuel flow @ 60 °F, scfh	905,353	907,153	910,010	830,933	829,870	829,227	830,077	829,843	829,830	830,117	853,241
"F _d " factor @ 68 °F, dscf/MMBtu	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624
"F _d " factor @ T _{ref} °F, dscf/MMBtu	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624
HHV @ 60 °F, btu/scf	1,025	1,025	1,025	1,025	1,025	1,025	1,025	1,025	1,025	1,025	1,025
Stack flow rate - based on fuel, dscfm	451,040	437,769	446,141	421,466	420,235	429,806	432,430	431,578	431,571	423,845	432,588
O ₂ , % volume dry	14.72	14.52	14.62	14.83	14.82	14.96	14.99	14.98	14.98	14.87	14.83
CO ₂ , % volume dry	3.56	3.70	3.57	3.37	3.41	3.55	3.38	3.40	3.35	3.55	3.48
CO, ppm volume dry	1.58	1.54	1.58	3.70	4.28	5.34	5.63	5.87	6.80	6.42	4.27
CO, ppm dry @ 15% O ₂	1.50	1.42	1.48	3.60	4.16	5.30	5.62	5.85	6.77	6.28	4.20
CO, lb/hr	3.10	2.93	3.07	6.80	7.85	10.01	10.62	11.05	12.79	11.86	8.01
CO, lb/day (24 hours)	74.4	70.4	73.8	163.2	188.4	240.2	254.8	265.2	307.0	284.7	192.2
CO, lb/MMBtu	0.003	0.003	0.003	0.008	0.009	0.012	0.012	0.013	0.015	0.014	0.009
NO _x , ppm volume dry	4.73	4.88	4.78	4.60	4.58	4.55	4.52	4.46	4.46	4.47	4.60
NO _x , ppm dry @ 15% O ₂	4.51	4.51	4.49	4.47	4.45	4.52	4.51	4.44	4.44	4.38	4.47
NO _x , lb/hr as NO ₂	15.28	15.31	15.29	13.87	13.79	14.01	14.01	13.78	13.79	13.58	14.27
NO _x , lb/day (24 hours) as NO ₂	367	367	367	333	331	336	336	331	331	326	343
NO _x , lb/MMBtu as NO ₂	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016
VOC, ppm volume dry	<0.50	<0.50	<0.50								0.50
VOC, ppm @ 15% O ₂	<0.48	<0.46	<0.47								0.47
VOC, lb/hr as CH ₄	<0.56	<0.55	<0.56								0.56
VOC, lb/day as CH ₄	<13.5	<13.1	<13.4								13.34
VOC, lb/MMBtu as CH ₄	<0.0006	<0.0006	<0.0006								0.001
SO ₂ , gr/100 scf	0.030	0.030	0.030								0.03
SO ₂ , ppm volume dry	0.02	0.02	0.02								0.02
SO ₂ , ppm dry @ 15% O ₂	0.02	0.02	0.02								0.02
SO ₂ , lb/hr	0.08	0.08	0.08								0.08
SO ₂ , lb/day (24 hours)	1.86	1.86	1.87								1.86
SO ₂ , lb/MMBtu	0.0001	0.0001	0.0001								0.0001

RELATIVE ACCURACY TEST AUDIT DETERMINATION
EPA CFR 40, PART 60, APPENDIX B, PS 3
Midway Sunset Cogeneration
Unit A

O₂, % volume dry

<u>Run #</u>	<u>Date</u>	<u>Time</u>	<u>RM</u>	<u>CEMS</u>	<u>Difference</u>	<u>n</u>	<u>t_{0.975}</u>
Run 1	4/21/26	1855-1925	14.72	14.67	0.051	1	100.00
Run 2	4/21/26	1938-2008	14.52	14.66	-0.137	2	12.706
Run 3	4/21/26	2020-2050	14.62	14.65	-0.033	3	4.303
Run 4	4/21/26	2110-2140	14.83	14.89	-0.060	4	3.182
Run 5	4/21/26	2155-2225	14.82	14.90	-0.083	5	2.776
Run 6	4/21/26	2237-2307	14.96	14.94	0.017	6	2.571
Run 7	4/21/26	2318-2348	14.99	14.94	0.047	7	2.447
Run 8	4/22/26	2359-0029	14.98	14.93	0.050	8	2.365
Run 9	4/22/26	0039-0109	14.98	14.96	0.023	9	2.306
Run 10	4/22/26	0138-0208	14.87	14.93	-0.057	10	2.262
AVERAGES:			14.86	14.87	-0.005		
STANDARD DEVIATION:					0.053		
CONFIDENCE COEFFICIENT:					0.041		
RELATIVE ACCURACY (BASED ON ABSOLUTE DIFFERENCE), %:							

RELATIVE ACCURACY TEST AUDIT DETERMINATION
EPA CFR 40, PART 60, APPENDIX B, PS 3
Midway Sunset Cogeneration
Unit A

CO₂, % volume dry

<u>Run #</u>	<u>Date</u>	<u>Time</u>	<u>RM</u>	<u>CEMS</u>	<u>Difference</u>	<u>n</u>	<u>t_{0.975}</u>
Run 1	4/21/26	1855-1925	3.56	3.79	-0.232	1	100.00
Run 2	4/21/26	1938-2008	3.70	3.80	-0.102	2	12.706
Run 3	4/21/26	2020-2050	3.57	3.80	-0.227	3	4.303
Run 4	4/21/26	2110-2140	3.37	3.60	-0.230	4	3.182
Run 5	4/21/26	2155-2225	3.41	3.60	-0.189	5	2.776
Run 6	4/21/26	2237-2307	3.55	3.60	-0.054	6	2.571
Run 7	4/21/26	2318-2348	3.38	3.60	-0.223	7	2.447
Run 8	4/22/26	2359-0029	3.40	3.60	-0.205	8	2.365
Run 9	4/22/26	0039-0109	3.35	3.60	-0.254	9	2.306
Run 10	4/22/26	0138-0208	3.55	3.60	-0.048	10	2.262
AVERAGES:			3.50	3.67	-0.168		
STANDARD DEVIATION:					0.078		
CONFIDENCE COEFFICIENT:					0.060		
RELATIVE ACCURACY (BASED ON ABSOLUTE DIFFERENCE), %:							
						<u>Criteria</u>	<u>Result</u>
						≤1	0.17

Note: The relative accuracy (RA) of the CEMS must be no greater than 1.0 percent O₂.

RELATIVE ACCURACY TEST AUDIT DETERMINATION

EPA CFR 40, PART 60, APPENDIX B, PS 2

Midway Sunset Cogeneration

Unit A

NO_x, ppm @ 15% O₂

Run #	Date	Time	RM	CEMS	Difference	n	t _{0.975}						
Run 1	4/21/26	1855-1925	4.51	4.44	0.073	1	100.00						
Run 2	4/21/26	1938-2008	4.51	4.42	0.095	2	12.706						
Run 3	4/21/26	2020-2050	4.49	4.45	0.045	3	4.303						
Run 4	4/21/26	2110-2140	4.47	4.45	0.016	4	3.182						
Run 5	4/21/26	2155-2225	4.45	4.44	0.009	5	2.776						
Run 6	4/21/26	2237-2307	4.52	4.43	0.085	6	2.571						
Run 7	4/21/26	2318-2348	4.51	4.45	0.067	7	2.447						
Run 8	4/22/26	2359-0029	4.44	4.42	0.023	8	2.365						
Run 9	4/22/26	0039-0109	4.44	4.44	0.002	9	2.306						
Run 10	4/22/26	0138-0208	4.38	4.44	-0.064	10	2.262						
AVERAGES:			4.47	4.44	0.028	> 50% of limit, must use RM criteria							
EMISSION LIMIT:					5.00								
STANDARD DEVIATION:					0.046	<table><tr><th><u>Criteria</u></th><th><u>Result</u></th></tr><tr><td>≤20</td><td>1.42</td></tr><tr><td>≤10</td><td>1.27</td></tr></table>		<u>Criteria</u>	<u>Result</u>	≤20	1.42	≤10	1.27
<u>Criteria</u>	<u>Result</u>												
≤20	1.42												
≤10	1.27												
CONFIDENCE COEFFICIENT:					0.035								
RELATIVE ACCURACY (BASED ON REFERENCE METHOD), %:													
RELATIVE ACCURACY (BASED ON APPLICABLE STANDARD), %:													

Note: The relative accuracy (RA) of the CEMS must be no greater than 20 percent when the reference method (RM) is used in the denominator of Equation 2-6 (the average emissions during the test are greater than 50 percent of the emission standard) or 10 percent when the applicable standard (AS) is used in the denominator of Equation 2-6 (the average emissions during the test are less than 50 percent of the emission standard).

RELATIVE ACCURACY TEST AUDIT DETERMINATION

EPA CFR 40, PART 60, APPENDIX B, PS 2 / 6

Midway Sunset Cogeneration

Unit A

NO_x, lb/hr

Run #	Date	Time	RM	CEMS	Difference	n	t _{0.975}						
Run 1	4/21/26	1855-1925	15.28	15.02	0.264	1	100.00						
Run 2	4/21/26	1938-2008	15.31	14.97	0.338	2	12.706						
Run 3	4/21/26	2020-2050	15.29	15.16	0.131	3	4.303						
Run 4	4/21/26	2110-2140	13.87	14.02	-0.149	4	3.182						
Run 5	4/21/26	2155-2225	13.79	13.92	-0.128	5	2.776						
Run 6	4/21/26	2237-2307	14.01	13.98	0.027	6	2.571						
Run 7	4/21/26	2318-2348	14.01	14.04	-0.034	7	2.447						
Run 8	4/22/26	2359-0029	13.78	13.92	-0.140	8	2.365						
Run 9	4/22/26	0039-0109	13.79	14.00	-0.210	9	2.306						
Run 10	4/22/26	0138-0208	13.58	13.98	-0.398	10	2.262						
AVERAGES:			14.30	14.33	-0.030	> 50% of limit,							
EMISSION LIMIT:					17.66	<u>must use RM criteria</u>							
STANDARD DEVIATION:					0.238	<table><tr><th><u>Criteria</u></th><th><u>Result</u></th></tr><tr><td>≤20</td><td>1.49</td></tr><tr><td>≤10</td><td>1.20</td></tr></table>		<u>Criteria</u>	<u>Result</u>	≤20	1.49	≤10	1.20
<u>Criteria</u>	<u>Result</u>												
≤20	1.49												
≤10	1.20												
CONFIDENCE COEFFICIENT:					0.183								
RELATIVE ACCURACY (BASED ON REFERENCE METHOD), %:													
RELATIVE ACCURACY (BASED ON APPLICABLE STANDARD), %:													

Note: Since this unit incorporates the total equipment required for the determining and recording the pollutant mass emission rate (in terms of mass per unit of time), the unit is technically defined as a continuous emissions rate monitoring system (CERMS) and is subject to Performance Specification (PS) 6. The relative accuracy (RA) of the CERMS shall be no greater than 20 percent of the mean value of the reference method (RM) test data in terms of the units of the emission standard, or 10 percent of the applicable standard (AS), whichever is greater.

RELATIVE ACCURACY TEST AUDIT DETERMINATION

EPA CFR 40, PART 60, APPENDIX B, PS 4/4A

Midway Sunset Cogeneration

Unit A

CO, ppm @ 15% O₂

Run #	Date	Time	RM	CEMS	Difference	n	t _{0.975}								
Run 1	4/21/26	1855-1925	1.50	0.93	0.573	1	100.00								
Run 2	4/21/26	1938-2008	1.42	0.88	0.544	2	12.706								
Run 3	4/21/26	2020-2050	1.48	0.91	0.574	3	4.303								
Run 4	4/21/26	2110-2140	3.60	3.00	0.595	4	3.182								
Run 5	4/21/26	2155-2225	4.16	3.55	0.604	5	2.776								
Run 6	4/21/26	2237-2307	5.30	4.61	0.696	6	2.571								
Run 7	4/21/26	2318-2348	5.62	4.83	0.794	7	2.447								
Run 8	4/22/26	2359-0029	5.85	5.10	0.751	8	2.365								
Run 9	4/22/26	0039-0109	6.77	6.04	0.736	9	2.306								
Run 10	4/22/26	0138-0208	6.28	5.63	0.645	10	2.262								
AVERAGES:			4.51	3.84	0.663	<u>choose only one of the three available criteria</u>									
EMISSION LIMIT:					25.00										
STANDARD DEVIATION:					0.083										
CONFIDENCE COEFFICIENT:					0.064	<table><tr><th><u>Criteria</u></th><th><u>Result</u></th></tr><tr><td>≤10</td><td>16.14</td></tr><tr><td>≤5</td><td>2.91</td></tr><tr><td>≤5</td><td>0.73</td></tr></table>		<u>Criteria</u>	<u>Result</u>	≤10	16.14	≤5	2.91	≤5	0.73
<u>Criteria</u>	<u>Result</u>														
≤10	16.14														
≤5	2.91														
≤5	0.73														
RELATIVE ACCURACY (BASED ON REFERENCE METHOD), %:															
RELATIVE ACCURACY (BASED ON APPLICABLE STANDARD), %:															
RELATIVE ACCURACY (BASED ON DIFFERENCE), PPM:					- 4A only -										

Note: Performance Specification (PS) 4 is to be used on sources operating above 200 ppm analyzer span and PS 4A on sources operating below 200 ppm analyzer span. The relative accuracy (RA) of the CEMS must be no greater than 10 percent when the average reference method (RM) value is used to calculate RA, 5 percent when the applicable standard (AS) is used to calculate RA, or within 5 ppm (to be used with PS 4A only) when the RA is calculated as the absolute average difference between the RM and CEMS plus the 2.5 percent confidence coefficient.

RELATIVE ACCURACY TEST AUDIT DETERMINATION

EPA CFR 40, PART 60, APPENDIX B, PS 4(A) / 6

Midway Sunset Cogeneration

Unit A

CO, lb/hr

Run #	Date	Time	RM	CEMS	Difference	n	t _{0.975}								
Run 1	4/21/26	1855-1925	3.10	2.01	1.093	1	100.00								
Run 2	4/21/26	1938-2008	2.93	1.90	1.033	2	12.706								
Run 3	4/21/26	2020-2050	3.07	1.93	1.141	3	4.303								
Run 4	4/21/26	2110-2140	6.80	5.78	1.023	4	3.182								
Run 5	4/21/26	2155-2225	7.85	6.75	1.098	5	2.776								
Run 6	4/21/26	2237-2307	10.01	8.82	1.191	6	2.571								
Run 7	4/21/26	2318-2348	10.62	9.27	1.345	7	2.447								
Run 8	4/22/26	2359-0029	11.05	9.75	1.301	8	2.365								
Run 9	4/22/26	0039-0109	12.79	11.54	1.248	9	2.306								
Run 10	4/22/26	0138-0208	11.86	10.73	1.129	10	2.262								
AVERAGES:			7.72	6.58	1.140	<u>choose only one or the three available criteria</u>									
EMISSION LIMIT:					54.91										
STANDARD DEVIATION:					0.093										
CONFIDENCE COEFFICIENT:					0.072	<table><tr><th><u>Criteria</u></th><th><u>Result</u></th></tr><tr><td>≤20</td><td>15.69</td></tr><tr><td>≤10</td><td>2.21</td></tr><tr><td>≤9.43</td><td>1.21</td></tr></table>		<u>Criteria</u>	<u>Result</u>	≤20	15.69	≤10	2.21	≤9.43	1.21
<u>Criteria</u>	<u>Result</u>														
≤20	15.69														
≤10	2.21														
≤9.43	1.21														
RELATIVE ACCURACY (BASED ON REFERENCE METHOD), %:															
RELATIVE ACCURACY (BASED ON APPLICABLE STANDARD), %:															
RELATIVE ACCURACY (BASED ON DIFFERENCE), LB/HR:															

Note: Since this unit incorporates the total equipment required for the determining and recording the pollutant mass emission rate (in terms of mass per unit of time), the unit is technically defined as a continuous emissions rate monitoring system (CERMS) and is subject to Performance Specification (PS) 6. The relative accuracy (RA) of the CERMS shall be no greater than 20 percent of the mean value of the reference method (RM) test data in terms of the units of the emission standard, or 10 percent of the applicable standard (AS), whichever is greater.

RELATIVE ACCURACY TEST AUDIT DETERMINATION											
Midway Sunset Cogeneration											
Old Horiba System											
Test No.	Run 1	Run 2	Run 3	Run 4	Run 5	Run 6	Run 7	Run 8	Run 9	Run 10	Average
Date	4/21/26	4/21/26	4/21/26	4/21/26	4/21/26	4/21/26	4/21/26	4/21/26	4/22/26	4/22/26	Runs 1-10
Start Time	1855-1925	1938-2008	2020-2050	2110-2140	2155-2225	2237-2307	2318-2348	2359-0029	0039-0109	0138-0208	-
Reference temperature, °F	68.00	68.00	68.00	68.00	68.00	68.00	68.00	68.00	68.00	68.00	68.00
Unit load, MW	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Unit fuel flow @ 60 °F, scfh	905.353	907.153	910.010	830.933	829.870	829.227	830.077	829.843	829.830	830.117	853,241
"F _d " factor @ 68 °F, dscf/MMBtu	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624
"F _d " factor @ T _{ref} °F, dscf/MMBtu	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624	8,624
HHV @ 60 °F, btu/scf	1,025	1,025	1,025	1,025	1,025	1,025	1,025	1,025	1,025	1,025	1,025
Stack flow rate - based on fuel, dscfm	451,040	437,769	446,141	421,466	420,235	429,806	432,430	431,578	431,571	423,845	432,588
O ₂ , % volume dry	14.72	14.52	14.62	14.83	14.82	14.96	14.99	14.98	14.98	14.87	14.83
CO ₂ , % volume dry	3.56	3.70	3.57	3.37	3.41	3.55	3.38	3.40	3.35	3.55	3.48
CO, ppm volume dry	1.58	1.54	1.58	3.70	4.28	5.34	5.63	5.87	6.80	6.42	4.27
CO, ppm dry @ 15% O ₂	1.50	1.42	1.48	3.60	4.16	5.30	5.62	5.85	6.77	6.28	4.20
CO, lb/hr	3.10	2.93	3.07	6.80	7.85	10.01	10.62	11.05	12.79	11.86	8.01
CO, lb/day (24 hours)	74.4	70.4	73.8	163.2	188.4	240.2	254.8	265.2	307.0	284.7	192.2
CO, lb/MMBtu	0.003	0.003	0.003	0.008	0.009	0.012	0.012	0.013	0.015	0.014	0.009
NO _x , ppm volume dry	4.73	4.88	4.78	4.60	4.58	4.55	4.52	4.46	4.46	4.47	4.60
NO _x , ppm dry @ 15% O ₂	4.51	4.51	4.49	4.47	4.45	4.52	4.51	4.44	4.44	4.38	4.47
NO _x , lb/hr as NO ₂	15.28	15.31	15.29	13.87	13.79	14.01	14.01	13.78	13.79	13.58	14.27
NO _x , lb/day (24 hours) as NO ₂	367	367	367	333	331	336	336	331	331	326	343
NO _x , lb/MMBtu as NO ₂	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016	0.016

RELATIVE ACCURACY TEST AUDIT DETERMINATION

EPA CFR 40, PART 60, APPENDIX B, PS 3

Midway Sunset Cogeneration

Old Horiba System

O₂, % volume dry

<u>Run #</u>	<u>Date</u>	<u>Time</u>	<u>RM</u>	<u>CEMS</u>	<u>Difference</u>	<u>n</u>	<u>t_{0.975}</u>
Run 1	4/21/26	1855-1925	14.72	14.59	0.130	1	100.00
Run 2	4/21/26	1938-2008	14.52	14.60	-0.080	2	12.706
Run 3	4/21/26	2020-2050	14.62	14.59	0.030	3	4.303
Run 4	4/21/26	2110-2140	14.83	14.80	0.030	4	3.182
Run 5	4/21/26	2155-2225	14.82	14.78	0.040	5	2.776
Run 6	4/21/26	2237-2307	14.96	14.81	0.150	6	2.571
Run 7	4/21/26	2318-2348	14.99	14.91	0.080	7	2.447
Run 8	4/21/26	2359-0029	14.98	14.81	0.170	8	2.365
Run 9	4/22/26	0039-0109	14.98	14.83	0.150	9	2.306
Run 10	4/22/26	0138-0208	14.87	14.82	0.050	10	2.262
AVERAGES:			14.81	14.75	0.064		
STANDARD DEVIATION:					0.074		
CONFIDENCE COEFFICIENT:					0.056		
RELATIVE ACCURACY (BASED ON ABSOLUTE DIFFERENCE), %:							
						<u>Criteria</u>	<u>Result</u>
						≤1	0.06

Note: The relative accuracy (RA) of the CEMS must be no greater than 1.0 percent O₂.

RELATIVE ACCURACY TEST AUDIT DETERMINATION
EPA CFR 40, PART 60, APPENDIX B, PS 2
Midway Sunset Cogeneration
Old Horiba System

NO_x, ppm volume dry

<u>Run #</u>	<u>Date</u>	<u>Time</u>	<u>RM</u>	<u>CEMS</u>	<u>Difference</u>	<u>n</u>	<u>t_{0.975}</u>						
Run 1	4/21/26	1855-1925	4.73	4.39	0.339	1	100.00						
Run 2	4/21/26	1938-2008	4.88	4.42	0.462	2	12.706						
Run 3	4/21/26	2020-2050	4.78	4.45	0.334	3	4.303						
Run 4	4/21/26	2110-2140	4.60	4.25	0.345	4	3.182						
Run 5	4/21/26	2155-2225	4.58	4.11	0.471	5	2.776						
Run 6	4/21/26	2237-2307	4.55	4.19	0.359	6	2.571						
Run 7	4/21/26	2318-2348	4.52	4.13	0.391	7	2.447						
Run 8	4/21/26	2359-0029	4.46	4.12	0.338	8	2.365						
Run 9	4/22/26	0039-0109	4.46	4.07	0.390	9	2.306						
Run 10	4/22/26	0138-0208	4.47	4.15	0.322	10	2.262						
AVERAGES:			4.57	4.21	0.365	> 50% of limit,							
EMISSION LIMIT:					0.00	<u>must use RM criteria</u>							
STANDARD DEVIATION:					0.046	<table><tr><th><u>Criteria</u></th><th><u>Result</u></th></tr><tr><td>≤20</td><td>8.77</td></tr><tr><td>≤10</td><td>N/A</td></tr></table>		<u>Criteria</u>	<u>Result</u>	≤20	8.77	≤10	N/A
<u>Criteria</u>	<u>Result</u>												
≤20	8.77												
≤10	N/A												
CONFIDENCE COEFFICIENT:					0.036								
RELATIVE ACCURACY (BASED ON REFERENCE METHOD), %:													
RELATIVE ACCURACY (BASED ON APPLICABLE STANDARD), %:													

Note: The relative accuracy (RA) of the CEMS must be no greater than 20 percent when the reference method (RM) is used in the denominator of Equation 2-6 (the average emissions during the test are greater than 50 percent of the emission standard) or 10 percent when the applicable standard (AS) is used in the denominator of Equation 2-6 (the average emissions during the test are less than 50 percent of the emission standard).

RELATIVE ACCURACY TEST AUDIT DETERMINATION

EPA CFR 40, PART 60, APPENDIX B, PS 2

Midway Sunset Cogeneration

Old Horiba System

NO_x, ppm @ 15% O₂

Run #	Date	Time	RM	CEMS	Difference	n	t _{0.975}						
Run 1	4/21/26	1855-1925	4.51	4.17	0.345	1	100.00						
Run 2	4/21/26	1938-2008	4.51	4.18	0.335	2	12.706						
Run 3	4/21/26	2020-2050	4.49	4.20	0.295	3	4.303						
Run 4	4/21/26	2110-2140	4.47	4.16	0.306	4	3.182						
Run 5	4/21/26	2155-2225	4.45	4.05	0.395	5	2.776						
Run 6	4/21/26	2237-2307	4.52	4.13	0.388	6	2.571						
Run 7	4/21/26	2318-2348	4.51	4.07	0.443	7	2.447						
Run 8	4/21/26	2359-0029	4.44	4.04	0.403	8	2.365						
Run 9	4/22/26	0039-0109	4.44	4.06	0.385	9	2.306						
Run 10	4/22/26	0138-0208	4.38	4.11	0.266	10	2.262						
AVERAGES:			4.48	4.13	0.351	> 50% of limit, must use RM criteria							
EMISSION LIMIT:					5.00								
STANDARD DEVIATION:					0.057	<table><tr><th>Criteria</th><th>Result</th></tr><tr><td>≤20</td><td>8.81</td></tr><tr><td>≤10</td><td>7.89</td></tr></table>		Criteria	Result	≤20	8.81	≤10	7.89
Criteria	Result												
≤20	8.81												
≤10	7.89												
CONFIDENCE COEFFICIENT:					0.044								
RELATIVE ACCURACY (BASED ON REFERENCE METHOD), %:													
RELATIVE ACCURACY (BASED ON APPLICABLE STANDARD), %:													

Note: The relative accuracy (RA) of the CEMS must be no greater than 20 percent when the reference method (RM) is used in the denominator of Equation 2-6 (the average emissions during the test are greater than 50 percent of the emission standard) or 10 percent when the applicable standard (AS) is used in the denominator of Equation 2-6 (the average emissions during the test are less than 50 percent of the emission standard).

RELATIVE ACCURACY TEST AUDIT DETERMINATION

EPA CFR 40, PART 60, APPENDIX B, PS 2 / 6

Midway Sunset Cogeneration

Old Horiba System

NO_x, lb/hr

<u>Run #</u>	<u>Date</u>	<u>Time</u>	<u>RM</u>	<u>CEMS</u>	<u>Difference</u>	<u>n</u>	<u>t</u> _{0.975}						
Run 1	4/21/26	1855-1925	15.28	13.62	1.661	1	100.00						
Run 2	4/21/26	1938-2008	15.31	13.54	1.771	2	12.706						
Run 3	4/21/26	2020-2050	15.29	13.76	1.531	3	4.303						
Run 4	4/21/26	2110-2140	13.87	11.78	2.094	4	3.182						
Run 5	4/21/26	2155-2225	13.79	11.49	2.302	5	2.776						
Run 6	4/21/26	2237-2307	14.01	11.69	2.317	6	2.571						
Run 7	4/21/26	2318-2348	14.01	11.61	2.396	7	2.447						
Run 8	4/21/26	2359-0029	13.78	11.44	2.344	8	2.365						
Run 9	4/22/26	0039-0109	13.79	11.37	2.420	9	2.306						
Run 10	4/22/26	0138-0208	13.58	11.53	2.049	10	2.262						
AVERAGES:			14.32	12.27	2.052	> 50% of limit,							
EMISSION LIMIT:					17.66	<u>must use RM criteria</u>							
STANDARD DEVIATION:					0.324	<table><tr><th><u>Criteria</u></th><th><u>Result</u></th></tr><tr><td>≤20</td><td>16.06</td></tr><tr><td>≤10</td><td>13.03</td></tr></table>		<u>Criteria</u>	<u>Result</u>	≤20	16.06	≤10	13.03
<u>Criteria</u>	<u>Result</u>												
≤20	16.06												
≤10	13.03												
CONFIDENCE COEFFICIENT:					0.249								
RELATIVE ACCURACY (BASED ON REFERENCE METHOD), %:													
RELATIVE ACCURACY (BASED ON APPLICABLE STANDARD), %:													

Note: Since this unit incorporates the total equipment required for the determining and recording the pollutant mass emission rate (in terms of mass per unit of time), the unit is technically defined as a continuous emissions rate monitoring system (CERMS) and is subject to Performance Specification (PS) 6. The relative accuracy (RA) of the CERMS shall be no greater than 20 percent of the mean value of the reference method (RM) test data in terms of the units of the emission standard, or 10 percent of the applicable standard (AS), whichever is greater.

RELATIVE ACCURACY TEST AUDIT DETERMINATION

EPA CFR 40, PART 60, APPENDIX B, PS 4/4A

Midway Sunset Cogeneration

Old Horiba System

CO, ppm volume dry

Run #	Date	Time	RM	CEMS	Difference	n	t _{0.975}								
Run 1	4/21/26	1855-1925	1.58	0.81	0.765	1	100.00								
Run 2	4/21/26	1938-2008	1.54	0.71	0.826	2	12.706								
Run 3	4/21/26	2020-2050	1.58	0.78	0.800	3	4.303								
Run 4	4/21/26	2110-2140	3.70	2.51	1.189	4	3.182								
Run 5	4/21/26	2155-2225	4.28	2.96	1.324	5	2.776								
Run 6	4/21/26	2237-2307	5.34	3.55	1.789	6	2.571								
Run 7	4/21/26	2318-2348	5.63	4.11	1.520	7	2.447								
Run 8	4/21/26	2359-0029	5.87	4.36	1.511	8	2.365								
Run 9	4/22/26	0039-0109	6.80	5.09	1.706	9	2.306								
Run 10	4/22/26	0138-0208	6.42	4.34	2.107	10	2.262								
AVERAGES:			4.03	2.76	1.270	<u>choose only one or the three available criteria</u>									
EMISSION LIMIT:					0.00										
STANDARD DEVIATION:					0.397										
CONFIDENCE COEFFICIENT:					0.305	<table><tr><th><u>Criteria</u></th><th><u>Result</u></th></tr><tr><td>≤10</td><td>39.05</td></tr><tr><td>≤5</td><td>N/A</td></tr><tr><td>≤5</td><td>1.58</td></tr></table>		<u>Criteria</u>	<u>Result</u>	≤10	39.05	≤5	N/A	≤5	1.58
<u>Criteria</u>	<u>Result</u>														
≤10	39.05														
≤5	N/A														
≤5	1.58														
RELATIVE ACCURACY (BASED ON REFERENCE METHOD), %:															
RELATIVE ACCURACY (BASED ON APPLICABLE STANDARD), %:															
RELATIVE ACCURACY (BASED ON DIFFERENCE), PPM:					- 4A only -										

Note: Performance Specification (PS) 4 is to be used on sources operating above 200 ppm analyzer span and PS 4A on sources operating below 200 ppm analyzer span. The relative accuracy (RA) of the CEMS must be no greater than 10 percent when the average reference method (RM) value is used to calculate RA, 5 percent when the applicable standard (AS) is used to calculate RA, or within 5 ppm (to be used with PS 4A only) when the RA is calculated as the absolute average difference between the RM and CEMS plus the 2.5 percent confidence coefficient.

RELATIVE ACCURACY TEST AUDIT DETERMINATION

EPA CFR 40, PART 60, APPENDIX B, PS 4(A) / 6

Midway Sunset Cogeneration

Old Horiba System

CO, lb/hr

Run #	Date	Time	RM	CEMS	Difference	n	t _{0.975}		
Run 1	4/21/26	1855-1925	3.10	1.48	1.618	1	100.00		
Run 2	4/21/26	1938-2008	2.93	1.47	1.463	2	12.706		
Run 3	4/21/26	2020-2050	3.07	1.63	1.444	3	4.303		
Run 4	4/21/26	2110-2140	6.80	4.37	2.429	4	3.182		
Run 5	4/21/26	2155-2225	7.85	5.08	2.772	5	2.776		
Run 6	4/21/26	2237-2307	10.01	5.99	4.018	6	2.571		
Run 7	4/21/26	2318-2348	10.62	6.84	3.778	7	2.447		
Run 8	4/21/26	2359-0029	11.05	7.45	3.601	8	2.365		
Run 9	4/22/26	0039-0109	12.79	8.73	4.062	9	2.306		
Run 10	4/22/26	0138-0208	11.86	7.30	4.562	10	2.262		
AVERAGES:					7.58	4.78	2.798	<u>choose only one or the three available criteria</u>	
EMISSION LIMIT:							54.91		
STANDARD DEVIATION:							1.109		
CONFIDENCE COEFFICIENT:							0.852		
RELATIVE ACCURACY (BASED ON REFERENCE METHOD), %:								<u>Criteria</u>	<u>Result</u>
RELATIVE ACCURACY (BASED ON APPLICABLE STANDARD), %:								≤20	48.16
RELATIVE ACCURACY (BASED ON DIFFERENCE), LB/HR:								≤10	6.65
								≤9.45	3.65

Note: Since this unit incorporates the total equipment required for the determining and recording the pollutant mass emission rate (in terms of mass per unit of time), the unit is technically defined as a continuous emissions rate monitoring system (CERMS) and is subject to Performance Specification (PS) 6. The relative accuracy (RA) of the CERMS shall be no greater than 20 percent of the mean value of the reference method (RM) test data in terms of the units of the emission standard, or 10 percent of the applicable standard (AS), whichever is greater.



Appendix A.5

Example Calculations

EXAMPLE CALCULATIONS GASEOUS EMISSIONS

Project name: Midway Sunset
 Computed by: J. Polthamus
 Run number: Unit A, Run 1

Project number: Proj-066225
 Calculation date: 2026-04-21
 Gaseous Species: NO_x

EMISSIONS DATA

Reference temperature, °R	<u>528</u>	$T_{ref} = (°F \text{ plus } 460)$
Concentration of gaseous species, ppmvd	<u>4.73</u>	C
Dry stack gas flow rate at standard conditions, dscfm	<u>451,040</u>	Q_{ds}
Stack O ₂ , % volume dry	<u>14.72</u>	O_2
"F" factor of fuel based on O ₂ , dscf/MMBtu @ 0% O ₂	<u>8,624</u>	F_d
Molecular weight of gaseous species, lb/lb-mol	<u>46.01</u>	MW_S , where
$MW_S =$ <u>28.01</u> for CO <u>46.01</u> for NO _x as NO ₂ <u>64.06</u> for SO _x as SO ₂		
Conversion factor from ppm to lb/scf for Tref	<u>1.19E-07</u>	CF where
<u>1.194E-07</u> [(lb/scf) / ppm] for NO _x		
<u>1.194E-07</u> x MW_x/MW_{NOX} [(lb/scf) / ppm] for other compounds (x)		

1 GASEOUS EMISSIONS

a. Concentration, ppm @ 15% O₂

$$C_{15} = C \frac{(20.9 - 15)}{(20.9 - \%O_2)}$$

$$C_{15} = 4.73 \times \frac{(20.9 - 15)}{(20.9 - 14.72)}$$

$$C_{15} = \underline{4.52} \text{ ppm @ 15\% O}_2$$

Note: The results calculated on these pages may differ slightly from the results presented in the final report. This difference can be attributed to "significant digit round-off errors" common when comparing computer spreadsheets results with those derived from using a calculator.

b. Mass emission rate, lb/hr

$$M = (C)(CF)(Q_{ds})(60 \text{ min/hr})$$

$$M = (4.73)(1.19E-07)(451,040)(60)$$

$$M = \underline{15.3} \text{ lb/hr}$$

c. Mass emission rate, lb/day

$$M' = (M)(24 \text{ hr/day})$$

$$M' = (15.28) \times 24$$

$$M' = \underline{367} \text{ lb/day}$$

d. Emission rate, lb/MMBtu

$$E = (C)(CF)(F_d) \left(\frac{20.9}{20.9 - \%O_2} \right)$$

$$E = \frac{(4.73)(1.19E-07)(8,624)(20.9)}{(20.9 - 14.72)}$$

$$E = \underline{0.016} \text{ lb/MMBtu}$$

EXAMPLE CALCULATIONS
RELATIVE ACCURACY CALCULATIONS

Project name: Midway Sunset
 Computed by: J. Polthamus
 Analyzer, Units: NO_x @ 15% O₂

Project number: Proj-066225
 Calculation date: 2026-04-21
 Equipment Unit: A

EMISSIONS DATA

RATA Results

Run #	RM	CEMS	Diff., d
Run 1	4.51	4.44	0.07
Run 2	4.51	4.42	0.09
Run 3	4.49	4.45	0.04
Run 4	4.47	4.45	0.02
Run 5	4.45	4.44	0.01
Run 6	4.52	4.43	0.09
Run 7	4.51	4.45	0.07
Run 8	4.44	4.42	0.02
Run 9	4.44	4.44	0.00
Run 10	4.38	4.44	-0.06

Number of runs, n 9 n
 t-value associated with n, t_{0.975} 2.306 t_{0.975}

Adapted from Figure 2-1 of 40 CFR 60 Appendix B, Performance Specification 2:

2	3	4	5	6	7	8	9	10	11	12
12.706	4.303	3.182	2.776	2.571	2.447	2.365	2.306	2.262	2.228	2.201

Note: The results calculated on these pages may differ slightly from the results presented in the final report. This difference can be attributed to "significant digit round-off errors" common when comparing computer spreadsheets results with those derived from using a calculator.

1. RELATIVE ACCURACY TEST AUDIT CALCULATIONS
a. Arithmetic Mean of Differences, $\bar{d}$

$$\bar{d} = \frac{1}{n} \sum_{i=1}^n d_i$$

$$\bar{d} = \frac{1}{9} (0.25)$$

$$\bar{d} = \underline{0.028}$$

b. Standard Deviation, S_d

$$S_d = \left[\frac{\sum_{i=1}^n d_i^2 - \left(\frac{(\sum_{i=1}^n d_i)^2}{n} \right)}{n - 1} \right]^{1/2}$$

$$S_d = \left[\frac{0.024 - \frac{1}{9} \times (0.254)^2}{9 - 1} \right]^{1/2}$$

$$S_d = \underline{0.046}$$

c. 2.5% Error Confidence Coefficient (one-tailed), CC

$$CC = t_{0.975} \left(\frac{S_d}{\sqrt{n}} \right)$$

$$CC = (2.306) \frac{(0.046)}{\sqrt{9}}$$

$$CC = \underline{0.035}$$

d. Relative Accuracy (based on applicable standard), RA

$$RA = \frac{(|\bar{d}| + |CC|)}{AS} \times 100$$

$$RA = \frac{(0.028 + 0.035)}{5.00} \times 100$$

$$RA = \underline{1.27} \%$$

e. Relative Accuracy (based on reference method data), RA

$$RA = \frac{(|\bar{d}| + |CC|)}{RM} \times 100$$

$$RA = \frac{(0.028 + 0.035)}{4.468} \times 100$$

$$RA = \underline{1.42} \%$$



Appendix A.6

General Equations

EMISSION CALCULATIONS

1. Volumetric Flow and Isokinetics

- a. Standard sample gas volume, dscf

$$V_{m\ std} = (V_m)(Y) \frac{(T_{std} + 460) \left(P_{bar} + \frac{\Delta H}{13.6} \right)}{(T_m + 460)(P_{std})}$$

- b. Water vapor volume, scf

$$V_{w\ std} = (0.04716)(V_{lc}) \left(\frac{T_{std} + 460}{528} \right)$$

- c. Moisture content, non-dimensional

$$B_{ws} = \frac{V_{w\ std}}{(V_{m\ std} + V_{w\ std})}$$

- d. Stack gas molecular weight, lb/lb mole (dry)

$$MW_{dry} = [0.44(\%CO_2)] + [0.32(\%O_2)] + [0.28(\%N_2)]$$

- e. Stack gas molecular weight, lb/lb mole (wet)

$$MW_{wet} = [MW_{dry}(1 - B_{ws})] + [18(B_{ws})]$$

- f. Absolute stack pressure, in Hg

$$P_s = P_{bar} + \left(\frac{P_{sg}}{13.6} \right)$$

- g. Stack velocity, ft/sec

$$v_s = (85.49)(C_p)(\sqrt{\Delta P}) \sqrt{\frac{T_s}{(P_s)(MW_{wet})}}$$

- h. Actual stack flow rate, acfm

$$Q = (v_s)(A_s)(60\ min/hr)$$

- i. Standard stack gas flow rate, wscfm

$$Q_{ws} = (v_s)(A_s)(60\ min/hr) \left(\frac{T_{std} + 460}{T_s + 460} \right) \left(\frac{P_s}{P_{std}} \right)$$

- j. Standard stack gas flow rate, dscfm

$$Q_{ds} = (v_s)(A_s)(60\ min/hr)(1 - B_{ws}) \left(\frac{T_{std} + 460}{T_s + 460} \right) \left(\frac{P_s}{P_{std}} \right)$$

- k. Percent isokinetic

$$I = \frac{(T_s)(V_{m\ std})(P_{std})(100)}{(T_{std} + 460)(v_s)(\theta)(A_n)(P_s)(60)(1 - B_{ws})}$$

2. Gaseous Emissions

- a. Concentration, ppm volume wet (i.e. to calculate wet ppm from dry ppm)

$$C_w = (C)(1 - B_{ws})$$

- b. Concentration, ppm @ 3% O₂ dry

$$C_3 = (C) \left[\frac{(20.9 - 3.0)}{(20.9 - \% O_2)} \right]$$

- c. Concentration, ppm @ 12% CO₂ dry

$$C_{12} = (C) \left(\frac{12.0}{\% CO_2} \right)$$

- d. Concentration, ppm volume dry (i.e. to calculate dry ppm from wet ppm)

$$C = \left[\frac{C_w}{(1 - B_{ws})} \right]$$

- e. Mass emission rate, lb/hr

$$M = (C)(CF)(Q_{ds})(60 \text{ min/hr})$$

where,

CF = conversion factor from ppm to lb/scf:

$$CF_{NOx} = 1.194 \times 10^{-7} \left(\frac{\text{lb/scf}}{\text{ppm}} \right)$$

$$CF_{SO} = 1.660 \times 10^{-7} \left(\frac{\text{lb/scf}}{\text{ppm}} \right)$$

$$CF_X = CF_{NOx} \left(\frac{MW_X}{MW_{NOx}} \right) \text{ for other compounds (x)}$$

- f. Emission rate, lb/MMBtu

$$E = (C)(CF)(F_d) \left(\frac{20.9}{20.9 - \% O_2} \right)$$

- g. Mass emission rate, grams/bhp-hr

$$M_j = (M) \left(\frac{453.59 \text{ g/lb}}{J} \right)$$

3. Particulate Emissions

- a. Grain loading, gr/dscf

$$G = (0.0154) \left(\frac{G_m}{V_{m\ std}} \right)$$

- b. Grain loading corrected to 12% CO
- ₂
- , gr/dscf @ 12% CO
- ₂

$$G_{12} = (G) \left(\frac{12.0}{\% CO_2} \right)$$

- c. Mass emission rate, lb/hr

$$M = (G)(Q_{ds}) \left(\frac{60\ min/hr}{7,000\ gr/lb} \right)$$

- d. Emission rate, lb/MMBtu

$$E = (G) \left(\frac{1\ lb}{7,000\ gr} \right) (F_d) \left(\frac{20.9}{20.9 - \% O_2} \right)$$

4. Fuel Factor "F"

- a. Choice #1 – use the values for F_d provided in Method 19, Table 19-1
 Choice #2 – if you have fuel ultimate and proximate analysis, calculate F_d
 (need fuel weight %CHONS, HHV)

Stoichiometric fuel factor at 68 °F, dscf/MMBtu at 0% O₂:

$$F_d = \frac{(10^6)[3.64(\% H) + 1.53(\% C) + 0.14(\% N) + 0.57(\% S) - 0.46(\% O)]}{HHV, Btu/lb}$$

- b. Fuel factor at 60 °F (use if all your volumes and flows are at 60 °F)

$$F_{d\ 60} = F_d \left(\frac{520^\circ R}{528^\circ R} \right)$$

5. Miscellaneous Equations

- a. Standard stack gas flow rate, calculated from fuel flow and F factor, dscfm

Note: Q_f and HHV need to be in units of either lb/hr and Btu/lb, or scf/hr and Btu/scf.
Do not mix units!

(calculation based on stack %O₂)

$$Q_{ds} = (Q_f)(HHV)(10^{-6})(F_d) \left(\frac{20.9}{20.9 - \% O_2} \right) / (60 \text{ min/hr})$$

or (calculation based on stack %CO₂ – see EPA Method 19 for values of F_c)

$$Q_{ds} = (Q_f)(HHV)(10^{-6})(F_c) \left(\frac{100}{\% CO_2} \right) / (60 \text{ min/hr})$$

- b. Destruction efficiency of emission control device, %

$$EFF = \left(\frac{C_{in} - C_{out}}{C_{in}} \right) (100\%) \quad \text{based on concentrations}$$

or

$$EFF = \left(\frac{M_{in} - M_{out}}{M_{in}} \right) (100\%) \quad \text{based on mass emission rates}$$

- c. Cylinder gas audit, % accuracy

$$A_c = \left(\frac{C_m - C_a}{C_a} \right) (100\%)$$

Nomenclature:

A_c	=	accuracy of CEMS during cylinder gas audit (CGA), % difference
A_n	=	nozzle area, in ² (πr^2), where $\pi = 3.1416$ and r = radius ($\frac{1}{2}$ diameter) in inches
A_s	=	stack area, ft ² (πr^2), where $\pi = 3.1416$ and r = radius ($\frac{1}{2}$ diameter) in feet
B_{ws}	=	flue gas moisture content (multiply by 100 for % by volume)
C	=	concentration of gaseous species, ppm volume dry
C_a	=	concentration of audit gas, ppm (for CGA, equation 5c)
C_m	=	concentration measured by CEMS, ppm (for CGA, equation 5c)
C_p	=	calibration factor for pitot tube, dimensionless
C_w	=	concentration of gaseous species, ppm volume wet
C_3	=	corrected concentration of gaseous species, ppm @ 3% O ₂ dry
C_{12}	=	corrected concentration of gaseous species, ppm @ 12% CO ₂ dry
E	=	mass emission rate, lb/MMBtu
EFF	=	destruction or removal efficiency of emission control device, % efficiency
F_c	=	stoichiometric "F" factor of fuel based on CO ₂ , dscf/MMBtu @ 100% CO ₂
F_d	=	stoichiometric "F" factor of fuel based on O ₂ , dscf/MMBtu @ 0% O ₂
G	=	particulate matter grain loading, grains/dscf
G_{12}	=	corrected particulate matter grain loading, grains/dscf @ 12% CO ₂
G_m	=	mass of collected particulate matter, mg
HHV	=	higher heating value, Btu/cubic foot
I	=	% isokinetic sampling rate, %
J	=	brake horsepower, bhp
M_j	=	mass emission rate of measured species (s), g/hp-hr
M	=	mass emission rate, lb/hr
MW_{dry}	=	molecular weight of stack gas, dry basis
MW_{wet}	=	molecular weight of stack gas, wet basis
MW_s	=	molecular weight of gaseous species (s), lb/lb mole:
		CO: 28.01 (can use 28) NO _x as NO ₂ : 46.01 (can use 46)
		SO _x as SO ₂ : 64.06 (can use 64) Hydrocarbons as C: 12.01 (can use 12)
		Hydrocarbons as CH ₄ : 16.04 (can use 16) Hydrocarbons as C ₃ H ₈ : 44.10 (can use 44)
		NH ₃ : 17.03 (can use 17)
N_2	=	nitrogen content of stack gas, % volume dry
P_{bar}	=	barometric pressure, in. Hg
P_s	=	stack absolute pressure, in. Hg
P_{sg}	=	stack static pressure, inches of water, gauge (iwg)
Q	=	wet stack gas flow rate at actual conditions, acfm
Q_f	=	fuel flow rate, scfh or lb/hr (be careful of units)
Q_{ds}	=	dry stack gas flow rate at standard conditions, dscfm
Q_{ws}	=	wet stack gas flow rate at standard conditions, wscfm
SV	=	specific molar volume of an ideal gas at standard conditions, ft ³ /lb mole
T_m	=	meter temperature, °R
T_{std}	=	reference temperature, °R
T_s	=	stack gas temperature, °R
v_s	=	stack gas velocity, ft/sec
V_{lc}	=	volume of liquid collected in impingers, ml
V_m	=	dry meter volume uncorrected, acf
$V_{m\ std}$	=	dry meter volume corrected to standard conditions, dscf
$V_{w\ std}$	=	volume of water vapor at standard conditions, scf
Y	=	meter calibration coefficient, dimensionless
ΔH	=	average pressure differential across meter, inches water
ΔP	=	average velocity head of stack gas, inches water
Θ	=	sampling time, minutes



Appendix B

Facility Process Data

Average Data

Plant: Midway Sunset
Interval: 1 Minute

Type: Roll

Report Period: 04/21/2026 18:50 Through 04/22/2026 02:15
Time Online Criteria: 1 minute(s)

Source Parameter Unit	UNIT_A											
	CO2 (%)	COLB/HR (LB/HR)	COPPM (PPM)	COPPMC (PPMC)	FLOWSCFH (SCFH)	GASFLOW (KSCFH)	LOAD (MW)	NOXLB/HR (LB/HR)	NOXLB/MM (LB/MMBTU)	NOXPPM (PPM)	NOXPPMC (PPMC)	O2 (%)
04/21/26 18:50	3.8	2.8	1.3	1.2	27,300,290.7	905.9	83.4	15.0	0.016	4.6	4.4	14.7
04/21/26 18:51	3.7	2.8	1.3	1.2	27,380,849.1	904.3	83.4	15.0	0.016	4.7	4.4	14.7
04/21/26 18:52	3.7	2.6	1.2	1.2	27,587,115.0	904.9	83.4	15.0	0.016	4.6	4.4	14.7
04/21/26 18:53	3.8	1.9	1.1	1.0	27,389,708.4	904.7	83.3	15.0	0.016	4.7	4.4	14.7
04/21/26 18:54	3.8	1.9	1.1	1.0	27,461,861.9	904.4	83.4	15.0	0.016	4.6	4.4	14.7
04/21/26 18:55	3.8	2.2	1.1	1.1	27,263,422.3	905.8	83.4	15.0	0.016	4.7	4.4	14.6
04/21/26 18:56	3.8	2.5	1.1	1.1	27,277,415.7	905.3	83.3	15.0	0.016	4.7	4.4	14.7
04/21/26 18:57	3.8	1.9	1.0	1.0	27,299,130.4	905.0	83.4	15.0	0.016	4.6	4.4	14.7
04/21/26 18:58	3.8	1.9	1.0	1.0	27,357,576.4	906.3	83.5	15.0	0.016	4.6	4.4	14.7
04/21/26 18:59	3.8	1.9	1.1	1.0	27,382,036.5	906.7	83.5	15.0	0.016	4.6	4.4	14.7
04/21/26 19:00	3.8	1.9	1.0	0.9	27,182,685.4	905.9	83.5	15.0	0.016	4.6	4.4	14.6
04/21/26 19:01	3.8	1.9	1.0	0.9	27,452,587.0	906.6	83.5	15.0	0.016	4.6	4.4	14.7
04/21/26 19:02	3.8	1.9	0.9	0.9	27,600,112.0	907.0	83.5	15.2	0.016	4.7	4.5	14.7
04/21/26 19:03	3.8	1.9	0.9	0.9	27,386,525.8	905.9	83.5	15.0	0.016	4.7	4.5	14.7
04/21/26 19:04	3.8	1.9	0.9	0.9	27,329,772.7	905.2	83.4	15.0	0.016	4.7	4.5	14.7
04/21/26 19:05	3.8	1.9	0.9	0.8	27,395,445.7	906.6	83.4	15.0	0.016	4.7	4.5	14.7
04/21/26 19:06	3.8	1.9	0.9	0.8	27,362,638.9	905.4	83.4	15.0	0.016	4.7	4.4	14.7
04/21/26 19:07	3.8	1.9	0.8	0.8	27,167,011.6	906.1	83.4	15.3	0.016	4.7	4.4	14.6
04/21/26 19:08	3.8	1.9	0.9	0.8	27,097,960.6	905.6	83.4	15.3	0.016	4.7	4.5	14.6
04/21/26 19:09	3.8	1.9	0.9	0.8	27,313,241.2	905.0	83.4	14.9	0.016	4.7	4.5	14.7
04/21/26 19:10	3.8	1.9	0.9	0.9	27,228,716.5	906.0	83.4	15.0	0.016	4.7	4.5	14.6
04/21/26 19:11	3.8	1.9	0.8	0.8	27,167,299.3	903.8	83.4	14.9	0.016	4.7	4.5	14.6
04/21/26 19:12	3.8	1.9	0.8	0.8	27,302,349.2	905.2	83.3	14.9	0.016	4.7	4.5	14.7
04/21/26 19:13	3.8	1.9	0.9	0.8	27,186,988.7	906.1	83.4	15.0	0.016	4.7	4.4	14.6
04/21/26 19:14	3.8	1.9	0.9	0.8	27,053,770.0	904.7	83.4	14.9	0.016	4.7	4.4	14.6
04/21/26 19:15	3.8	1.9	0.9	0.9	27,338,003.7	905.0	83.4	15.0	0.016	4.7	4.5	14.7
04/21/26 19:16	3.8	1.9	0.9	0.9	27,460,599.6	906.4	83.4	15.3	0.016	4.7	4.5	14.7
04/21/26 19:17	3.8	1.9	1.0	1.0	27,389,340.2	904.2	83.4	14.9	0.016	4.7	4.5	14.7
04/21/26 19:18	3.8	1.9	0.9	0.9	27,480,345.0	906.1	83.3	15.0	0.016	4.7	4.5	14.7
04/21/26 19:19	3.8	2.0	1.1	1.0	27,253,571.9	905.5	83.4	15.0	0.016	4.7	4.4	14.7
04/21/26 19:20	3.8	1.9	0.9	0.9	27,277,401.9	904.4	83.2	15.4	0.016	4.7	4.5	14.7
04/21/26 19:21	3.8	1.9	0.9	0.9	27,111,941.6	905.5	83.2	15.0	0.016	4.7	4.4	14.6
04/21/26 19:22	3.8	1.9	0.9	0.8	27,142,661.7	905.1	83.3	14.9	0.016	4.7	4.4	14.6
04/21/26 19:23	3.8	1.9	1.0	0.9	27,134,811.0	902.9	83.3	14.9	0.016	4.7	4.4	14.7
04/21/26 19:24	3.8	2.2	1.1	1.1	27,365,339.5	904.6	83.2	14.9	0.016	4.7	4.5	14.7
04/21/26 19:25	3.8	1.9	0.9	0.8	27,053,901.0	904.6	83.2	14.9	0.016	4.7	4.4	14.6
R1	3.79	2.01	0.98	0.93	27,303,734	905.4	83.4	15.02	0.016	4.68	4.44	14.67
04/21/26 19:26	3.8	1.9	0.9	0.8	27,040,511.7	903.0	83.3	14.9	0.016	4.7	4.4	14.6
04/21/26 19:27	3.8	1.9	0.8	0.8	27,219,055.2	905.2	83.2	15.0	0.016	4.7	4.4	14.6
04/21/26 19:28	3.8	1.7	0.8	0.7	26,933,867.1	902.6	83.3	14.9	0.016	4.7	4.4	14.6
04/21/26 19:29	3.8	1.9	0.9	0.8	27,197,323.8	903.0	83.3	14.9	0.016	4.7	4.4	14.7
04/21/26 19:30	3.8	1.9	0.9	0.8	27,282,655.2	906.7	83.4	15.0	0.016	4.7	4.4	14.6
04/21/26 19:31	3.8	1.9	0.8	0.8	27,175,261.4	905.7	83.5	15.0	0.016	4.7	4.5	14.6
04/21/26 19:32	3.8	1.9	0.9	0.8	27,281,347.0	905.1	83.4	15.0	0.016	4.7	4.4	14.7
04/21/26 19:33	3.8	1.9	1.0	0.9	27,310,437.8	906.5	83.5	15.0	0.016	4.7	4.4	14.7
04/21/26 19:34	3.8	1.9	1.0	0.9	27,352,615.5	905.8	83.5	15.0	0.016	4.7	4.5	14.7
04/21/26 19:35	3.7	1.9	0.9	0.9	27,356,135.3	905.7	83.5	15.0	0.016	4.7	4.5	14.7
04/21/26 19:36	3.8	1.9	0.9	0.9	27,304,628.4	907.4	83.5	15.0	0.016	4.7	4.4	14.6
04/21/26 19:37	3.8	1.9	0.8	0.8	27,264,013.5	905.9	83.5	15.0	0.016	4.7	4.5	14.7
04/21/26 19:38	3.8	1.9	0.9	0.8	27,367,980.4	907.5	83.6	15.0	0.016	4.7	4.4	14.7
R2												
04/21/26 19:39	3.8	1.9	0.9	0.9	27,263,053.5	906.0	83.5	15.0	0.016	4.7	4.4	14.7
04/21/26 19:40	3.8	1.9	1.0	0.9	27,231,635.2	905.6	83.6	15.0	0.016	4.7	4.4	14.6
04/21/26 19:41	3.8	1.9	0.9	0.9	27,217,398.5	907.8	83.5	15.0	0.016	4.7	4.4	14.6
04/21/26 19:42	3.8	1.9	1.0	0.9	27,318,695.0	906.0	83.5	15.0	0.016	4.7	4.4	14.7
04/21/26 19:43	3.8	1.9	1.0	0.9	27,138,736.7	905.7	83.5	15.0	0.016	4.7	4.4	14.6
04/21/26 19:44	3.8	1.9	1.0	0.9	27,330,347.3	906.9	83.4	15.0	0.016	4.7	4.5	14.7
04/21/26 19:45	3.8	1.9	0.9	0.9	27,133,899.1	904.9	83.4	14.9	0.016	4.7	4.4	14.6
04/21/26 19:46	3.8	1.9	0.9	0.8	27,019,642.7	905.2	83.4	14.9	0.016	4.7	4.4	14.6
04/21/26 19:47	3.8	1.9	0.8	0.8	27,372,522.1	906.1	83.4	15.0	0.016	4.7	4.4	14.7
04/21/26 19:48	3.8	1.9	0.8	0.8	27,256,726.1	904.7	83.4	14.9	0.016	4.7	4.4	14.7
04/21/26 19:49	3.8	1.9	0.9	0.8	27,169,729.2	905.4	83.4	14.9	0.016	4.7	4.4	14.6
04/21/26 19:50	3.8	1.9	1.0	0.9	27,328,718.6	905.9	83.5	15.0	0.016	4.7	4.5	14.7
04/21/26 19:51	3.8	1.9	0.9	0.9	27,335,124.2	906.6	83.5	15.0	0.016	4.7	4.4	14.7
04/21/26 19:52	3.8	1.9	0.9	0.9	27,203,862.2	905.8	83.5	15.0	0.016	4.7	4.4	14.6
04/21/26 19:53	3.8	1.9	0.9	0.8	27,087,857.5	907.2	83.5	14.9	0.016	4.7	4.4	14.6
04/21/26 19:54	3.8	1.9	0.9	0.8	27,195,456.1	905.8	83.6	14.9	0.016	4.7	4.4	14.7
04/21/26 19:55	3.8	1.9	0.9	0.9	27,240,475.4	908.4	83.6	15.0	0.016	4.7	4.4	14.7
04/21/26 19:56	3.8	1.9	0.9	0.9	27,445,840.1	907.8	83.6	15.0	0.016	4.7	4.4	14.7
04/21/26 19:57	3.8	1.9	0.9	0.9	27,421,534.1	907.6	83.7	15.1	0.016	4.7	4.5	14.7
04/21/26 19:58	3.8	1.9	0.9	0.9	27,494,285.3	909.1	83.7	15.0	0.016	4.7	4.5	14.7
04/21/26 19:59	3.8	1.9	0.9	0.9	27,512,974.4	908.5	83.8	15.0	0.016	4.7	4.5	14.7
04/21/26 20:00	3.8	1.9	0.9	0.9	27,267,176.0	907.3	83.7	14.9	0.016	4.7	4.4	14.7
04/21/26 20:01	3.8	1.9	0.9	0.9	27,390,678.8	909.4	83.7	15.0	0.016	4.7	4.4	14.7
04/21/26 20:02	3.8	1.9	0.9	0.9	27,256,016.2	907.6	83.8	14.9	0.016	4.7	4.4	14.7
04/21/26 20:03	3.8	1.9	1.0	0.9	27,206,066.3	907.5	83.8	14.9	0.016	4.7	4.4	14.6
04/21/26 20:04	3.8	1.9	0.9	0.9	27,330,736.9	908.9	83.7	15.0	0.016	4.7	4.5	14.7
04/21/26 20:05	3.8	1.9	0.9	0.9	27,219,017.0	908.9	83.9	15.0	0.016	4.7	4.4	14.6
04/21/26 20:06	3.8	1.9	0.9	0.9	27,193,256.5	909.1	83.9	15.0	0.016	4.7	4.4	14.6
04/21/26 20:07	3.8	1.9	0.9	0.8	27,179,389.5	910.4	83.9	15.0	0.016	4.7	4.4	14.6
04/21/26 20:08	3.8	1.9	1.0	0.9	27,160,285.6	908.5	83.9	15.0	0.016	4.7	4.4	14.6
End R2	3.80	1.90	0.92	0.88	27,264,038	907.2	83.6	14.97	0.02	4.70	4.42	14.66

F = Unit Offline

E = Exceedance

C = Calibration

S = Substituted

M = Maintenance

T = Out Of Control

* = Suspect

U = Startup

Report Generated: 04/15/25

Average Data

Plant: Midway Sunset
Interval: 1 Minute

Type: Roll

Report Period: 04/21/2026 18:50 Through 04/22/2026 02:15

Time Online Criteria: 1 minute(s)

04/21/26	20:09	3.8	1.9	0.9	0.9	27,104,941.7	909.5	83.9	15.1	0.016	4.7	4.4	14.6
04/21/26	20:10	3.8	1.9	0.9	0.9	27,208,342.7	908.7	83.9	15.4	0.016	4.7	4.5	14.6
04/21/26	20:11	3.8	1.9	0.9	0.8	27,123,361.7	909.7	84.0	15.0	0.016	4.7	4.4	14.6
04/21/26	20:12	3.8	1.9	0.8	0.8	27,221,872.5	910.2	83.9	15.6	0.017	4.8	4.5	14.6
04/21/26	20:13	3.8	1.9	0.9	0.8	27,152,684.4	908.6	83.9	15.0	0.016	4.7	4.5	14.6
04/21/26	20:14	3.8	1.9	0.9	0.9	27,302,783.4	909.3	83.9	15.1	0.016	4.7	4.5	14.7
04/21/26	20:15	3.8	1.9	1.0	0.9	27,394,948.1	910.9	84.0	15.0	0.016	4.7	4.5	14.7
04/21/26	20:16	3.8	1.9	0.9	0.8	27,297,312.8	907.9	83.9	15.6	0.017	4.8	4.5	14.7
04/21/26	20:17	3.8	1.7	0.9	0.8	27,467,729.9	909.3	83.9	15.0	0.016	4.7	4.5	14.7
04/21/26	20:18	3.8	2.2	1.1	1.0	27,660,324.5	910.9	84.0	15.0	0.016	4.7	4.4	14.7
04/21/26	20:19	3.8	1.9	0.9	0.9	27,321,824.1	909.0	83.9	15.1	0.016	4.7	4.5	14.7
04/21/26	20:20	3.8	1.6	0.8	0.8	27,390,953.5	910.7	83.9	15.0	0.016	4.7	4.5	14.7
R3													
04/21/26	20:21	3.8	1.9	1.0	0.9	27,455,999.5	910.1	83.9	15.0	0.016	4.7	4.5	14.7
04/21/26	20:22	3.8	1.9	1.0	0.9	27,458,705.6	909.2	83.9	15.0	0.016	4.7	4.5	14.7
04/21/26	20:23	3.8	1.9	1.0	1.0	27,352,668.6	910.6	83.9	15.0	0.016	4.7	4.4	14.7
04/21/26	20:24	3.8	1.9	0.9	0.9	27,303,381.0	909.2	83.9	15.0	0.016	4.7	4.5	14.7
04/21/26	20:25	3.8	1.9	0.9	0.9	27,208,378.8	908.9	83.9	15.0	0.016	4.7	4.4	14.6
04/21/26	20:26	3.8	1.9	0.9	0.9	27,390,759.2	911.4	83.9	15.0	0.016	4.7	4.5	14.7
04/21/26	20:27	3.8	1.9	1.0	0.9	27,307,974.2	908.5	83.9	15.0	0.016	4.7	4.5	14.7
04/21/26	20:28	3.8	1.9	1.0	0.9	27,330,686.2	909.0	84.0	15.0	0.016	4.7	4.4	14.7
04/21/26	20:29	3.8	1.9	1.0	0.9	27,368,128.4	910.3	84.0	15.0	0.016	4.7	4.4	14.7
04/21/26	20:30	3.8	1.9	1.0	0.9	27,375,673.9	908.8	83.9	15.0	0.016	4.7	4.4	14.7
04/21/26	20:31	3.8	1.9	0.9	0.9	27,359,770.5	909.4	83.9	15.0	0.016	4.7	4.4	14.7
04/21/26	20:32	3.8	1.9	1.0	0.9	27,273,914.2	910.0	83.9	15.0	0.016	4.7	4.4	14.6
04/21/26	20:33	3.8	1.9	1.0	0.9	27,244,728.0	908.8	84.0	15.0	0.016	4.7	4.4	14.7
04/21/26	20:34	3.8	1.9	1.0	0.9	27,358,704.6	911.2	84.0	15.0	0.016	4.7	4.4	14.7
04/21/26	20:35	3.8	2.2	1.1	1.0	27,347,313.3	910.7	84.0	15.0	0.016	4.7	4.4	14.7
04/21/26	20:36	3.8	1.9	1.0	0.9	27,194,095.4	909.9	84.0	15.0	0.016	4.7	4.4	14.6
04/21/26	20:37	3.8	1.9	0.9	0.9	27,343,864.1	911.3	84.0	15.0	0.016	4.7	4.5	14.7
04/21/26	20:38	3.8	1.9	0.9	0.8	27,250,488.4	909.7	84.0	15.0	0.016	4.7	4.5	14.6
04/21/26	20:39	3.8	1.9	0.8	0.8	27,251,367.6	910.1	84.0	15.0	0.016	4.7	4.5	14.6
04/21/26	20:40	3.8	1.9	0.9	0.8	27,293,846.3	911.7	84.0	15.8	0.017	4.8	4.5	14.6
04/21/26	20:41	3.8	1.9	1.0	0.9	27,160,849.7	909.5	84.1	15.9	0.017	4.8	4.5	14.6
04/21/26	20:42	3.8	2.5	1.2	1.1	27,244,582.9	911.4	84.0	15.9	0.017	4.8	4.5	14.6
04/21/26	20:43	3.8	2.0	1.0	1.0	27,394,503.6	909.7	84.0	15.7	0.017	4.8	4.5	14.7
04/21/26	20:44	3.8	1.9	0.9	0.9	27,192,450.9	910.0	84.0	15.0	0.016	4.7	4.4	14.6
04/21/26	20:45	3.8	1.9	1.0	0.9	27,136,235.3	910.8	84.1	15.0	0.016	4.7	4.4	14.6
04/21/26	20:46	3.8	1.9	1.0	1.0	27,206,651.1	909.4	84.0	15.0	0.016	4.6	4.4	14.6
04/21/26	20:47	3.8	1.9	1.0	0.9	27,378,031.4	911.3	84.1	15.0	0.016	4.7	4.4	14.7
04/21/26	20:48	3.8	1.9	0.9	0.9	27,229,810.8	910.0	84.0	15.5	0.017	4.8	4.5	14.6
04/21/26	20:49	3.8	1.9	0.9	0.8	27,163,144.5	908.7	84.0	15.7	0.017	4.8	4.5	14.6
04/21/26	20:50	3.8	1.9	1.0	1.0	27,177,434.3	910.7	84.0	15.3	0.016	4.7	4.5	14.6
End R3		3.80	1.93	0.97	0.91	27,291,805	910.0	84.0	15.16	0.02	4.72	4.45	14.65
04/21/26	20:51	3.8	1.9	1.0	0.9	27,043,620.2	910.0	84.0	15.9	0.017	4.8	4.5	14.6
04/21/26	20:52	3.8	1.9	1.0	0.9	27,129,051.9	910.2	84.0	15.1	0.016	4.7	4.4	14.6
04/21/26	20:53	3.8	1.9	0.9	0.9	27,304,929.6	912.2	84.1	15.0	0.016	4.7	4.4	14.6
04/21/26	20:54	3.8	1.9	0.9	0.8	27,196,042.1	910.2	84.1	15.4	0.016	4.7	4.5	14.6
04/21/26	20:55	3.8	1.9	0.9	0.9	27,284,094.3	910.8	84.0	15.3	0.016	4.7	4.5	14.7
04/21/26	20:56	3.8	1.9	1.0	0.9	27,218,720.2	909.5	83.8	15.8	0.017	4.8	4.5	14.6
04/21/26	20:57	3.8	1.9	1.0	0.9	27,195,061.2	908.2	83.8	15.9	0.017	4.8	4.5	14.6
04/21/26	20:58	3.8	1.9	1.0	0.9	27,303,370.2	909.5	83.8	15.1	0.016	4.7	4.5	14.7
04/21/26	20:59	3.8	1.9	1.0	0.9	27,097,401.9	908.2	83.8	15.0	0.016	4.7	4.4	14.6
04/21/26	21:00	3.7	1.9	1.1	1.0	27,426,734.0	908.3	83.7	15.0	0.016	4.7	4.5	14.7
04/21/26	21:01	3.8	1.9	1.0	1.0	27,467,794.4	908.1	83.7	15.3	0.016	4.7	4.5	14.7
04/21/26	21:02	3.8	1.9	1.1	1.0	27,127,933.8	904.7	83.3	15.1	0.016	4.7	4.4	14.7
04/21/26	21:03	3.7	5.4	3.7	2.6	26,165,779.5	865.7	79.2	17.7	0.020	5.8	5.4	14.7
04/21/26	21:04	3.7	10.4	5.1	5.3	25,783,284.7	843.4	76.6	15.0	0.016	4.6	4.7	14.8
04/21/26	21:05	3.6	10.0	5.4	5.2	25,361,671.0	829.3	75.4	12.5	0.015	4.1	4.0	14.8
04/21/26	21:06	3.6	7.3	3.7	3.8	26,184,299.8	832.5	75.5	12.6	0.015	4.2	4.1	14.9
04/21/26	21:07	3.6	6.6	3.5	3.4	26,038,137.9	831.7	75.5	13.7	0.016	4.4	4.3	14.9
04/21/26	21:08	3.6	6.1	3.1	3.2	26,030,731.1	831.1	75.6	13.7	0.016	4.4	4.3	14.9
04/21/26	21:09	3.6	6.0	3.2	3.1	25,923,474.8	832.6	75.6	13.7	0.016	4.4	4.3	14.9
04/21/26	21:10	3.6	5.5	2.9	2.9	25,918,098.6	830.3	75.6	14.0	0.016	4.5	4.4	14.9
R4													
04/21/26	21:11	3.6	5.3	2.8	2.8	26,045,618.1	831.0	75.4	14.3	0.017	4.6	4.5	14.9
04/21/26	21:12	3.6	5.4	2.9	2.8	26,043,779.0	832.2	75.5	14.1	0.017	4.6	4.5	14.9
04/21/26	21:13	3.6	5.3	2.8	2.8	25,974,912.2	828.3	75.3	14.1	0.017	4.6	4.5	14.9
04/21/26	21:14	3.6	5.8	3.0	3.0	25,929,134.4	830.0	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	21:15	3.6	5.3	2.9	2.8	25,857,645.9	831.7	75.5	14.6	0.017	4.6	4.5	14.9
04/21/26	21:16	3.6	5.5	2.9	2.9	25,965,966.5	829.2	75.4	14.1	0.016	4.5	4.5	14.9
04/21/26	21:17	3.6	6.1	3.3	3.2	25,864,900.0	833.0	75.6	14.0	0.016	4.5	4.4	14.9
04/21/26	21:18	3.6	5.9	3.1	3.0	25,755,772.6	831.8	75.5	13.7	0.016	4.5	4.4	14.9
04/21/26	21:19	3.6	6.1	3.3	3.2	25,754,219.1	829.1	75.3	13.7	0.016	4.5	4.4	14.9
04/21/26	21:20	3.6	5.7	2.9	2.9	25,638,242.6	831.3	75.3	13.7	0.016	4.5	4.4	14.8
04/21/26	21:21	3.6	6.0	3.1	3.0	25,756,318.1	828.7	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	21:22	3.6	5.7	3.0	2.9	25,870,559.1	832.1	75.7	14.4	0.017	4.6	4.5	14.9
04/21/26	21:23	3.6	6.0	3.1	3.1	25,941,968.1	830.3	75.3	14.5	0.017	4.6	4.5	14.9
04/21/26	21:24	3.6	6.0	3.3	3.2	25,762,619.7	829.7	75.4	13.7	0.016	4.5	4.4	14.9
04/21/26	21:25	3.6	5.4	2.8	2.9	26,012,415.9	832.3	75.6	14.1	0.017	4.6	4.5	14.9
04/21/26	21:26	3.6	5.7	3.2	3.0	26,046,510.4	833.0	75.6	14.4	0.017	4.6	4.5	14.9
04/21/26	21:27	3.6	5.7	2.9	2.9	26,016,150.1	830.3	75.5	14.2	0.016	4.5	4.5	14.9
04/21/26	21:28	3.6	5.9	3.2	3.1	25,839,225.7	832.8	75.6	14.1	0.016	4.5	4.4	14.9
04/21/26	21:29	3.6	5.9	3.0	3.0	25,730,359.9	831.9	75.6	13.7	0.016	4.5	4.4	14.8
04/21/26	21:30	3.6	5.7	3.0	2.9	25,566,269.6	829.9	75.5	13.7	0.016	4.5	4.3	14.8

F = Unit Offline

E = Exceedance

C = Calibration

S = Substituted

M = Maintenance

Average Data

Plant: Midway Sunset
Interval: 1 Minute

Type: Roll

Report Period: 04/21/2026 18:50 Through 04/22/2026 02:15

Time Online Criteria: 1 minute(s)

04/21/26	21:31	3.6	6.1	3.3	3.2	25,764,994.4	832.9	75.5	13.7	0.016	4.5	4.4	14.9
04/21/26	21:32	3.6	6.0	3.1	3.1	26,018,402.3	829.3	75.5	13.9	0.016	4.5	4.5	14.9
04/21/26	21:33	3.6	6.0	3.2	3.1	25,992,275.3	829.5	75.4	14.0	0.016	4.5	4.5	14.9
04/21/26	21:34	3.6	5.7	3.0	3.0	25,995,390.0	832.5	75.6	14.1	0.016	4.5	4.5	14.9
04/21/26	21:35	3.6	6.0	3.2	3.1	25,842,410.6	830.4	75.5	14.1	0.017	4.6	4.5	14.9
04/21/26	21:36	3.6	5.6	3.1	3.0	25,880,241.1	832.2	75.4	14.0	0.016	4.5	4.4	14.9
04/21/26	21:37	3.6	5.6	2.9	2.8	25,932,197.6	831.1	75.5	14.0	0.016	4.5	4.4	14.9
04/21/26	21:38	3.6	6.0	3.2	3.0	25,968,097.9	829.9	75.5	14.1	0.016	4.5	4.5	14.9
04/21/26	21:39	3.6	6.1	3.2	3.2	25,958,757.3	832.1	75.5	14.0	0.016	4.5	4.4	14.9
04/21/26	21:40	3.6	5.8	3.1	3.1	26,046,143.3	829.5	75.5	14.1	0.016	4.5	4.5	14.9
End R4		3.60	5.78	3.06	3.00	25,892,383	830.9	75.5	14.02	0.02	4.53	4.45	14.89
04/21/26	21:41	3.6	6.0	3.3	3.2	25,749,952.7	828.7	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	21:42	3.6	6.0	3.2	3.2	25,918,246.9	831.9	75.5	13.7	0.016	4.5	4.4	14.9
04/21/26	21:43	3.6	5.7	3.1	3.0	25,739,302.0	827.7	75.3	14.1	0.017	4.6	4.5	14.9
04/21/26	21:44	3.6	6.0	3.3	3.2	25,849,645.2	828.2	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	21:45	3.6	5.6	2.9	2.9	26,062,439.3	832.3	75.5	14.6	0.017	4.6	4.5	14.9
04/21/26	21:46	3.6	5.8	3.1	3.1	25,992,164.5	829.2	75.4	14.2	0.017	4.6	4.5	14.9
04/21/26	21:47	3.6	7.1	3.8	3.7	25,874,140.3	827.7	75.2	14.0	0.016	4.5	4.5	14.9
04/21/26	21:48	3.6	5.8	3.1	3.2	26,052,408.7	829.7	75.5	14.0	0.016	4.5	4.5	14.9
04/21/26	21:49	3.6	6.4	3.5	3.3	25,878,524.8	828.8	75.5	14.4	0.017	4.6	4.5	14.9
04/21/26	21:50	3.6	6.8	3.7	3.6	25,991,588.3	830.2	75.4	14.4	0.017	4.6	4.5	14.9
04/21/26	21:51	3.6	7.1	3.8	3.8	25,940,683.9	830.2	75.5	13.7	0.016	4.4	4.4	14.9
04/21/26	21:52	3.6	6.7	3.6	3.5	26,038,668.2	830.4	75.5	13.8	0.016	4.5	4.4	14.9
04/21/26	21:53	3.6	5.8	3.0	3.1	26,066,748.9	833.7	75.6	14.0	0.017	4.6	4.5	14.9
04/21/26	21:54	3.6	6.4	3.6	3.4	25,812,580.1	827.7	75.3	13.9	0.016	4.4	4.4	14.9
04/21/26	21:55	3.6	6.6	3.6	3.6	25,722,084.7	830.2	75.5	13.5	0.016	4.4	4.3	14.9
R5													
04/21/26	21:56	3.6	6.4	3.4	3.3	25,808,513.2	830.8	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	21:57	3.6	6.1	3.3	3.3	25,915,205.9	830.5	75.6	13.7	0.016	4.5	4.4	14.9
04/21/26	21:58	3.6	6.0	3.4	3.3	26,098,079.8	829.9	75.5	13.7	0.016	4.5	4.4	14.9
04/21/26	21:59	3.6	7.3	3.8	3.8	25,844,852.8	831.2	75.5	13.7	0.016	4.4	4.3	14.9
04/21/26	22:00	3.6	6.7	3.5	3.5	25,836,218.1	829.2	75.5	13.8	0.016	4.5	4.4	14.9
04/21/26	22:01	3.6	6.6	3.8	3.6	25,802,938.1	830.1	75.4	13.8	0.016	4.5	4.5	14.9
04/21/26	22:02	3.6	7.2	3.7	3.8	25,803,803.7	830.2	75.4	13.7	0.016	4.5	4.4	14.9
04/21/26	22:03	3.6	6.8	3.5	3.5	25,935,149.5	830.8	75.6	14.3	0.017	4.6	4.5	14.9
04/21/26	22:04	3.6	5.9	3.3	3.2	25,894,610.1	831.3	75.5	14.2	0.017	4.6	4.5	14.9
04/21/26	22:05	3.6	6.6	3.6	3.5	25,907,785.3	829.0	75.5	13.7	0.016	4.5	4.4	14.9
04/21/26	22:06	3.6	7.0	3.7	3.6	25,847,102.0	829.1	75.4	14.1	0.017	4.6	4.5	14.9
04/21/26	22:07	3.6	6.2	3.4	3.3	26,087,908.7	831.6	75.6	14.0	0.016	4.5	4.5	14.9
04/21/26	22:08	3.6	6.3	3.3	3.3	25,982,793.0	829.1	75.6	13.9	0.016	4.5	4.5	14.9
04/21/26	22:09	3.6	6.7	3.5	3.5	26,080,443.1	830.1	75.5	13.8	0.016	4.4	4.4	14.9
04/21/26	22:10	3.6	6.6	3.5	3.4	25,981,843.0	828.9	75.3	13.7	0.016	4.5	4.4	14.9
04/21/26	22:11	3.6	6.8	3.7	3.6	25,882,003.9	828.5	75.4	13.7	0.016	4.4	4.4	14.9
04/21/26	22:12	3.6	6.4	3.4	3.4	26,152,767.2	830.8	75.5	14.4	0.017	4.6	4.5	14.9
04/21/26	22:13	3.6	6.7	3.5	3.5	26,076,682.5	830.9	75.6	14.2	0.017	4.6	4.5	14.9
04/21/26	22:14	3.6	6.8	3.7	3.6	25,990,622.2	830.0	75.6	14.1	0.016	4.5	4.5	14.9
04/21/26	22:15	3.6	6.8	3.7	3.6	25,935,492.8	831.4	75.6	13.7	0.016	4.5	4.4	14.9
04/21/26	22:16	3.6	7.7	4.1	3.9	25,789,191.7	829.0	75.4	13.7	0.016	4.5	4.4	14.9
04/21/26	22:17	3.6	7.2	3.8	3.7	25,911,782.9	827.0	75.3	13.8	0.016	4.5	4.4	14.9
04/21/26	22:18	3.6	7.5	3.9	3.9	26,005,057.7	829.8	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	22:19	3.6	6.5	3.5	3.5	25,942,488.9	830.1	75.7	13.8	0.016	4.5	4.4	14.9
04/21/26	22:20	3.6	6.1	3.4	3.3	25,918,286.9	831.4	75.6	14.0	0.016	4.5	4.5	14.9
04/21/26	22:21	3.6	7.3	3.9	3.8	25,725,808.0	830.5	75.4	13.7	0.016	4.4	4.3	14.9
04/21/26	22:22	3.6	7.4	3.9	3.8	26,100,104.2	827.6	75.4	14.1	0.017	4.5	4.4	15.0
04/21/26	22:23	3.6	7.2	3.8	3.8	25,880,394.8	829.5	75.5	13.8	0.016	4.5	4.4	14.9
04/21/26	22:24	3.6	7.1	3.8	3.7	26,105,709.6	830.0	75.6	14.4	0.017	4.6	4.5	14.9
04/21/26	22:25	3.6	6.7	3.7	3.6	25,810,429.5	827.8	75.5	14.5	0.017	4.6	4.6	14.9
End R5		3.60	6.75	3.62	3.55	25,935,136	829.9	75.5	13.92	0.02	4.51	4.44	14.90
04/21/26	22:26	3.6	7.0	3.7	3.6	25,843,240.9	832.0	75.6	14.0	0.016	4.5	4.4	14.9
04/21/26	22:27	3.6	6.6	3.5	3.4	25,680,704.1	829.3	75.5	13.7	0.016	4.5	4.4	14.9
04/21/26	22:28	3.6	6.9	3.6	3.6	25,763,577.8	828.5	75.5	13.9	0.016	4.5	4.4	14.9
04/21/26	22:29	3.6	7.0	3.9	3.7	25,862,601.0	830.9	75.5	13.8	0.016	4.5	4.4	14.9
04/21/26	22:30	3.6	7.7	4.0	4.0	25,998,916.8	827.9	75.4	13.8	0.016	4.5	4.5	14.9
04/21/26	22:31	3.6	7.1	3.7	3.7	25,909,422.4	828.1	75.4	13.6	0.016	4.5	4.4	14.9
04/21/26	22:32	3.6	7.4	3.9	3.8	25,870,584.8	829.3	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	22:33	3.6	7.7	4.2	4.0	25,883,463.7	827.0	75.4	14.1	0.016	4.5	4.5	14.9
04/21/26	22:34	3.6	8.2	4.3	4.3	25,884,933.5	829.4	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	22:35	3.6	9.0	4.8	4.7	26,094,467.8	827.2	75.4	14.2	0.017	4.5	4.4	15.0
04/21/26	22:36	3.6	8.4	4.4	4.4	26,098,880.1	826.7	75.4	13.9	0.016	4.4	4.4	15.0
04/21/26	22:37	3.6	8.5	4.5	4.5	26,086,596.2	829.6	75.5	13.8	0.016	4.5	4.4	14.9
R6													
04/21/26	22:38	3.6	8.1	4.3	4.2	25,918,836.8	827.8	75.5	13.6	0.016	4.5	4.4	14.9
04/21/26	22:39	3.6	7.2	3.9	3.8	25,896,937.8	828.0	75.5	13.8	0.016	4.5	4.5	14.9
04/21/26	22:40	3.6	7.8	4.2	4.1	26,028,212.8	831.0	75.5	14.0	0.016	4.5	4.4	14.9
04/21/26	22:41	3.6	7.8	4.1	4.1	25,822,328.9	829.1	75.6	14.1	0.017	4.6	4.5	14.9
04/21/26	22:42	3.6	7.6	4.0	4.0	25,967,105.1	831.0	75.6	14.3	0.017	4.6	4.5	14.9
04/21/26	22:43	3.6	7.7	4.2	4.0	25,915,617.8	828.8	75.4	14.1	0.016	4.5	4.5	14.9
04/21/26	22:44	3.6	9.0	4.7	4.7	26,065,150.9	828.3	75.5	13.9	0.016	4.5	4.4	14.9
04/21/26	22:45	3.6	8.0	4.2	4.2	25,963,575.2	830.1	75.5	14.3	0.017	4.6	4.5	14.9
04/21/26	22:46	3.6	7.8	4.2	4.2	26,081,163.9	829.2	75.5	14.2	0.017	4.6	4.5	14.9
04/21/26	22:47	3.6	9.1	4.8	4.7	26,174,210.3	829.6	75.7	14.5	0.017	4.5	4.5	15.0
04/21/26	22:48	3.6	7.8	4.3	4.2	26,131,236.2	828.7	75.4	14.4	0.016	4.5	4.5	14.9
04/21/26	22:49	3.6	9.0	4.7	4.6	26,217,760.2	829.3	75.5	14.0	0.016	4.4	4.4	15.0
04/21/26	22:50	3.6	9.0	4.8	4.7	26,073,765.0	827.5	75.4	13.8	0.017	4.5	4.4	15.0
04/21/26	22:51	3.6	9.2	4.8	4.9	26,280,603.8	829.3	75.5	13.9	0.017	4.5	4.4	15.0

F = Unit Offline

E = Exceedance

C = Calibration

S = Substituted

M = Maintenance

T = Out Of Control

* = Suspect

U = Startup

Report Generated: 04/15/25

Average Data

Plant: Midway Sunset
Interval: 1 Minute

Type: Roll

Report Period: 04/21/2026 18:50 Through 04/22/2026 02:15

Time Online Criteria: 1 minute(s)

04/21/26	22:52	3.6	9.4	5.1	4.9	26,125,472.6	827.8	75.4	14.1	0.017	4.5	4.4	15.0
04/21/26	22:53	3.6	9.2	4.9	4.9	26,105,292.4	830.6	75.5	13.8	0.016	4.4	4.4	14.9
04/21/26	22:54	3.6	9.3	4.8	4.8	26,237,374.5	828.4	75.5	13.9	0.017	4.5	4.4	15.0
04/21/26	22:55	3.6	9.7	5.2	5.1	26,106,149.2	828.1	75.5	13.6	0.016	4.4	4.4	15.0
04/21/26	22:56	3.6	9.4	4.9	4.8	26,241,172.3	830.0	75.4	14.1	0.017	4.5	4.4	15.0
04/21/26	22:57	3.6	10.7	5.5	5.5	26,308,315.1	829.0	75.4	14.4	0.017	4.5	4.5	15.0
04/21/26	22:58	3.6	9.4	5.1	4.9	25,850,706.9	827.0	75.4	13.6	0.016	4.5	4.4	14.9
04/21/26	22:59	3.6	9.8	5.0	5.1	26,227,351.8	831.7	75.6	13.7	0.016	4.4	4.4	15.0
04/21/26	23:00	3.6	9.1	4.7	4.7	26,147,480.6	830.6	75.6	14.1	0.016	4.5	4.4	14.9
04/21/26	23:01	3.6	9.0	4.7	4.7	26,059,275.1	830.4	75.6	14.2	0.016	4.5	4.5	14.9
04/21/26	23:02	3.6	9.0	4.7	4.7	25,966,411.1	830.1	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	23:03	3.6	8.7	4.7	4.6	25,919,145.6	827.9	75.4	13.6	0.016	4.4	4.4	14.9
04/21/26	23:04	3.6	9.0	4.8	4.7	25,979,319.2	829.1	75.4	13.9	0.016	4.5	4.4	14.9
04/21/26	23:05	3.6	9.4	5.0	5.0	26,179,802.1	829.6	75.4	13.8	0.017	4.5	4.4	15.0
04/21/26	23:06	3.6	9.0	4.6	4.6	26,154,036.1	828.2	75.5	13.8	0.017	4.5	4.4	15.0
04/21/26	23:07	3.6	9.3	4.9	4.8	26,279,419.3	830.6	75.5	14.1	0.017	4.5	4.4	15.0
End R6		3.60	8.82	4.66	4.61	26,080,781	829.2	75.5	13.98	0.02	4.50	4.43	14.94
04/21/26	23:08	3.6	9.4	4.7	4.8	26,298,033.6	829.9	75.6	14.1	0.017	4.5	4.4	15.0
04/21/26	23:09	3.6	8.6	4.5	4.4	26,140,407.1	828.7	75.5	14.2	0.016	4.5	4.5	14.9
04/21/26	23:10	3.6	8.9	4.7	4.6	26,194,535.5	830.5	75.4	14.1	0.017	4.5	4.5	15.0
04/21/26	23:11	3.6	9.2	4.9	4.9	26,200,573.3	828.6	75.5	14.4	0.017	4.5	4.5	15.0
04/21/26	23:12	3.6	9.1	4.8	4.7	26,104,856.1	829.1	75.4	14.1	0.016	4.5	4.5	14.9
04/21/26	23:13	3.6	9.1	5.0	4.8	26,100,908.8	829.8	75.4	13.7	0.016	4.4	4.4	14.9
04/21/26	23:14	3.6	9.2	4.8	4.9	25,957,161.5	827.4	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	23:15	3.6	9.2	4.9	4.8	26,168,569.5	831.7	75.6	14.1	0.016	4.5	4.5	14.9
04/21/26	23:16	3.6	9.8	5.2	5.1	26,291,508.6	829.9	75.5	14.4	0.017	4.6	4.6	15.0
04/21/26	23:17	3.6	9.5	5.0	5.0	26,080,708.9	827.5	75.4	13.7	0.017	4.5	4.4	15.0
04/21/26	23:18	3.6	10.1	5.3	5.3	26,392,757.5	831.2	75.5	13.8	0.016	4.4	4.4	15.0
R7													
04/21/26	23:19	3.6	9.9	5.1	5.1	26,342,948.7	829.0	75.5	14.1	0.017	4.5	4.5	15.0
04/21/26	23:20	3.6	10.3	5.4	5.3	26,068,146.9	828.4	75.4	14.1	0.016	4.5	4.4	14.9
04/21/26	23:21	3.6	9.7	5.0	5.0	26,155,635.3	829.9	75.5	13.7	0.016	4.4	4.4	15.0
04/21/26	23:22	3.6	9.0	4.7	4.6	26,194,538.4	828.7	75.5	14.2	0.017	4.5	4.5	15.0
04/21/26	23:23	3.6	9.1	4.6	4.7	26,225,427.5	828.2	75.3	14.2	0.017	4.5	4.4	15.0
04/21/26	23:24	3.6	9.0	4.6	4.6	26,202,922.4	829.3	75.4	13.9	0.016	4.4	4.4	15.0
04/21/26	23:25	3.6	8.4	4.5	4.4	26,099,678.7	829.5	75.5	13.8	0.016	4.5	4.5	14.9
04/21/26	23:26	3.6	8.9	4.8	4.6	26,021,913.4	830.9	75.6	14.0	0.016	4.5	4.5	14.9
04/21/26	23:27	3.6	9.4	4.9	5.0	26,170,504.2	829.0	75.4	14.2	0.017	4.5	4.5	15.0
04/21/26	23:28	3.6	9.3	5.0	4.9	25,984,735.2	828.3	75.5	13.9	0.016	4.5	4.4	14.9
04/21/26	23:29	3.6	9.9	5.2	5.1	26,105,632.6	832.5	75.6	13.9	0.016	4.5	4.4	14.9
04/21/26	23:30	3.6	9.2	4.7	4.8	26,253,265.6	827.9	75.4	14.3	0.017	4.5	4.5	15.0
04/21/26	23:31	3.6	9.5	5.1	5.0	26,075,411.2	828.5	75.4	13.7	0.016	4.4	4.4	14.9
04/21/26	23:32	3.6	10.6	5.6	5.6	26,272,478.7	831.8	75.6	14.0	0.016	4.4	4.4	15.0
04/21/26	23:33	3.6	10.0	5.3	5.2	26,281,149.1	829.7	75.5	14.3	0.017	4.5	4.5	15.0
04/21/26	23:34	3.6	9.7	4.9	5.0	26,166,215.1	832.6	75.6	14.2	0.016	4.5	4.5	14.9
04/21/26	23:35	3.6	9.6	5.3	5.1	26,060,883.7	828.3	75.4	14.2	0.016	4.5	4.5	14.9
04/21/26	23:36	3.6	9.8	5.0	5.1	26,158,637.0	827.5	75.4	14.1	0.017	4.5	4.4	15.0
04/21/26	23:37	3.6	10.1	5.2	5.2	26,274,783.3	830.1	75.4	14.3	0.017	4.5	4.5	15.0
04/21/26	23:38	3.6	9.4	4.8	4.8	26,249,207.6	830.1	75.5	14.5	0.017	4.6	4.5	15.0
04/21/26	23:39	3.6	9.9	5.3	5.1	26,148,995.6	831.3	75.5	14.4	0.016	4.5	4.5	14.9
04/21/26	23:40	3.6	9.1	4.7	4.7	26,005,402.5	831.2	75.5	14.4	0.017	4.6	4.5	14.9
04/21/26	23:41	3.6	8.5	4.4	4.5	25,977,242.3	830.3	75.5	14.0	0.016	4.5	4.4	14.9
04/21/26	23:42	3.6	8.3	4.5	4.4	25,892,797.0	832.6	75.6	13.9	0.016	4.5	4.4	14.9
04/21/26	23:43	3.6	8.6	4.5	4.5	25,912,820.4	831.7	75.5	13.7	0.016	4.5	4.4	14.9
04/21/26	23:44	3.6	8.3	4.4	4.3	26,009,761.6	831.2	75.6	13.7	0.016	4.5	4.4	14.9
04/21/26	23:45	3.6	8.7	4.5	4.5	25,957,150.0	832.9	75.6	13.7	0.016	4.4	4.4	14.9
04/21/26	23:46	3.6	8.4	4.6	4.5	25,915,107.6	829.7	75.4	13.7	0.016	4.4	4.4	14.9
04/21/26	23:47	3.6	8.8	4.7	4.6	26,028,973.2	830.6	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	23:48	3.6	8.8	4.6	4.6	26,225,971.4	830.6	75.3	14.3	0.017	4.5	4.5	15.0
End R7		3.60	9.27	4.86	4.83	26,114,611	830.1	75.5	14.04	0.02	4.49	4.45	14.94
04/21/26	23:49	3.6	8.8	4.7	4.7	25,979,586.1	828.9	75.4	13.8	0.016	4.5	4.4	14.9
04/21/26	23:50	3.6	9.3	4.9	4.8	26,329,998.8	831.3	75.4	14.5	0.017	4.5	4.5	15.0
04/21/26	23:51	3.6	8.4	4.4	4.4	26,271,837.6	830.6	75.4	14.3	0.017	4.6	4.5	15.0
04/21/26	23:52	3.6	9.4	5.1	4.9	26,201,831.2	828.3	75.5	14.4	0.017	4.5	4.5	15.0
04/21/26	23:53	3.6	10.5	5.3	5.4	26,210,822.6	831.7	75.5	14.3	0.016	4.5	4.5	14.9
04/21/26	23:54	3.6	9.4	5.0	4.9	26,158,569.9	828.4	75.5	14.1	0.017	4.5	4.4	15.0
04/21/26	23:55	3.6	10.2	5.3	5.3	26,150,483.6	828.5	75.4	14.4	0.017	4.5	4.5	15.0
04/21/26	23:56	3.6	9.1	4.7	4.8	26,451,950.3	832.7	75.6	14.0	0.017	4.5	4.5	15.0
04/21/26	23:57	3.6	8.4	4.5	4.4	26,172,708.7	829.8	75.5	14.5	0.017	4.6	4.5	15.0
04/21/26	23:58	3.6	9.3	4.8	4.8	26,301,286.6	830.9	75.5	14.0	0.017	4.5	4.5	15.0
04/21/26	23:59	3.6	9.4	4.9	4.9	26,555,389.6	830.4	75.5	13.7	0.016	4.4	4.4	15.0
R8													
04/22/26	00:00	3.6	9.6	5.2	5.0	26,035,962.0	829.3	75.5	13.8	0.016	4.5	4.4	14.9
04/22/26	00:01	3.6	9.9	5.2	5.1	26,004,190.1	831.7	75.4	13.7	0.016	4.4	4.3	14.9
04/22/26	00:02	3.6	10.0	5.2	5.1	25,911,654.0	829.6	75.5	13.7	0.016	4.4	4.4	14.9
04/22/26	00:03	3.6	9.8	5.2	5.2	25,984,884.5	829.9	75.5	13.7	0.016	4.5	4.4	14.9
04/22/26	00:04	3.6	8.5	4.5	4.4	25,983,581.5	830.9	75.4	13.8	0.016	4.5	4.4	14.9
04/22/26	00:05	3.6	8.5	4.6	4.5	25,901,839.6	828.9	75.5	13.7	0.016	4.5	4.4	14.9
04/22/26	00:06	3.6	9.3	5.0	4.9	26,003,300.7	830.9	75.6	13.7	0.016	4.5	4.4	14.9
04/22/26	00:07	3.6	9.2	5.0	4.8	26,053,183.9	830.5	75.5	13.7	0.016	4.5	4.4	14.9
04/22/26	00:08	3.6	9.4	4.9	5.0	26,070,935.8	828.5	75.5	13.9	0.016	4.5	4.4	14.9
04/22/26	00:09	3.6	9.1	4.9	4.8	25,912,826.0	830.0	75.4	13.8	0.016	4.5	4.4	14.9
04/22/26	00:10	3.6	9.7	5.1	5.1	26,022,720.3	830.9	75.5	13.7	0.016	4.4	4.4	14.9
04/22/26	00:11	3.6	9.5	5.1	5.0	26,040,491.2	828.2	75.4	14.1	0.016	4.5	4.5	14.9
04/22/26	00:12	3.6	9.1	4.8	4.8	26,001,839.9	831.0	75.5	14.0	0.016	4.5	4.4	14.9

F = Unit Offline

E = Exceedance

C = Calibration

S = Substituted

M = Maintenance

T = Out Of Control

* = Suspect

Average Data

Plant: Midway Sunset
Interval: 1 Minute

Type: Roll

Report Period: 04/21/2026 18:50 Through 04/22/2026 02:15

Time Online Criteria: 1 minute(s)

04/22/26	00:13	3.6	9.2	4.8	4.7	25,884,427.4	828.4	75.4	14.1	0.017	4.6	4.5	14.9
04/22/26	00:14	3.6	8.7	4.6	4.5	26,199,216.2	828.9	75.5	14.1	0.017	4.5	4.5	15.0
04/22/26	00:15	3.6	10.0	5.2	5.2	26,190,915.4	830.7	75.4	14.1	0.016	4.4	4.4	14.9
04/22/26	00:16	3.6	9.8	5.3	5.2	26,153,609.8	829.7	75.6	14.0	0.017	4.5	4.4	15.0
04/22/26	00:17	3.6	9.8	5.0	5.0	26,516,949.8	830.6	75.5	14.5	0.017	4.6	4.6	15.0
04/22/26	00:18	3.6	9.7	5.2	5.2	26,266,156.9	829.6	75.3	14.2	0.017	4.5	4.5	15.0
04/22/26	00:19	3.6	10.8	5.6	5.6	26,285,171.9	828.3	75.5	14.1	0.016	4.4	4.4	15.0
04/22/26	00:20	3.6	10.0	5.2	5.1	26,309,707.1	828.7	75.4	14.2	0.017	4.5	4.5	15.0
04/22/26	00:21	3.6	10.5	5.5	5.6	26,301,744.4	829.5	75.6	13.7	0.016	4.4	4.4	15.0
04/22/26	00:22	3.6	9.8	5.1	5.1	26,193,721.7	830.2	75.6	14.2	0.016	4.5	4.4	14.9
04/22/26	00:23	3.6	10.0	5.5	5.3	26,015,430.3	830.4	75.5	14.0	0.016	4.5	4.5	14.9
04/22/26	00:24	3.6	11.3	5.9	5.9	26,310,124.2	830.6	75.6	14.3	0.017	4.5	4.4	15.0
04/22/26	00:25	3.6	10.1	5.3	5.4	26,186,057.9	830.2	75.5	13.8	0.016	4.4	4.4	14.9
04/22/26	00:26	3.6	10.0	5.4	5.3	26,078,823.9	831.3	75.5	13.7	0.016	4.4	4.3	14.9
04/22/26	00:27	3.6	10.4	5.4	5.4	26,225,344.4	828.8	75.5	13.9	0.016	4.4	4.4	15.0
04/22/26	00:28	3.6	10.7	5.6	5.5	26,121,502.7	829.3	75.4	13.8	0.016	4.5	4.4	14.9
04/22/26	00:29	3.6	10.3	5.4	5.3	26,036,018.8	829.8	75.5	13.7	0.016	4.5	4.4	14.9
End R8		3.60	9.75	5.16	5.10	26,106,744	829.8	75.5	13.92	0.02	4.48	4.42	14.93
04/22/26	00:30	3.6	10.5	5.4	5.5	25,900,447.2	830.0	75.5	13.7	0.016	4.5	4.4	14.9
04/22/26	00:31	3.6	10.4	5.5	5.3	26,117,715.2	830.5	75.4	14.4	0.016	4.5	4.5	14.9
04/22/26	00:32	3.6	9.8	5.2	5.2	26,058,813.8	829.9	75.6	14.1	0.016	4.5	4.5	14.9
04/22/26	00:33	3.6	9.5	5.2	5.1	26,093,538.1	829.1	75.4	14.5	0.017	4.6	4.5	15.0
04/22/26	00:34	3.6	10.7	5.6	5.6	26,312,311.2	830.6	75.5	14.3	0.017	4.5	4.5	15.0
04/22/26	00:35	3.6	10.8	5.6	5.6	26,104,163.4	828.6	75.4	13.8	0.016	4.4	4.4	15.0
04/22/26	00:36	3.6	10.4	5.4	5.4	26,237,472.5	830.7	75.4	13.8	0.016	4.4	4.4	15.0
04/22/26	00:37	3.6	10.6	5.7	5.6	26,132,817.1	829.3	75.3	14.0	0.017	4.5	4.5	15.0
04/22/26	00:38	3.6	11.1	5.7	5.8	26,242,845.6	828.6	75.4	14.4	0.017	4.5	4.5	15.0
04/22/26	00:39	3.6	10.7	5.7	5.6	26,147,808.8	830.4	75.4	14.0	0.016	4.4	4.4	14.9
R9													
04/22/26	00:40	3.6	10.5	5.5	5.4	26,105,073.9	828.2	75.3	13.9	0.017	4.5	4.4	15.0
04/22/26	00:41	3.6	11.1	5.8	5.8	26,194,214.0	829.5	75.5	13.8	0.016	4.4	4.4	15.0
04/22/26	00:42	3.6	10.2	5.3	5.3	26,403,175.6	830.8	75.4	14.5	0.017	4.5	4.5	15.0
04/22/26	00:43	3.6	10.2	5.4	5.3	26,095,535.1	828.8	75.4	13.9	0.016	4.5	4.5	14.9
04/22/26	00:44	3.6	10.1	5.3	5.3	26,242,645.5	829.7	75.4	13.8	0.016	4.4	4.4	15.0
04/22/26	00:45	3.6	11.9	6.2	6.1	26,263,975.8	831.1	75.6	14.3	0.017	4.5	4.5	15.0
04/22/26	00:46	3.6	11.4	6.2	6.1	26,096,137.4	827.5	75.4	13.9	0.016	4.5	4.5	14.9
04/22/26	00:47	3.6	13.5	7.1	7.1	26,192,955.9	830.0	75.5	13.7	0.016	4.4	4.4	15.0
04/22/26	00:48	3.6	12.3	6.3	6.4	26,548,411.1	831.2	75.6	13.7	0.016	4.4	4.4	15.0
04/22/26	00:49	3.6	12.6	6.9	6.6	26,127,035.8	827.8	75.4	13.9	0.016	4.5	4.4	14.9
04/22/26	00:50	3.6	12.7	6.4	6.5	26,045,009.6	831.4	75.4	13.7	0.016	4.4	4.3	14.9
04/22/26	00:51	3.6	13.1	6.9	6.9	26,117,695.9	829.2	75.5	13.9	0.016	4.5	4.4	14.9
04/22/26	00:52	3.6	12.3	6.6	6.4	26,108,163.5	830.4	75.6	13.8	0.016	4.5	4.4	14.9
04/22/26	00:53	3.6	12.4	6.4	6.5	26,126,137.3	830.6	75.4	14.1	0.016	4.5	4.5	14.9
04/22/26	00:54	3.6	12.1	6.4	6.3	25,927,027.6	828.1	75.4	13.9	0.016	4.5	4.4	14.9
04/22/26	00:55	3.6	11.0	5.5	5.6	26,129,983.0	832.4	75.6	14.0	0.016	4.5	4.5	14.9
04/22/26	00:56	3.6	10.1	5.4	5.3	26,140,637.8	831.1	75.6	14.4	0.017	4.6	4.5	14.9
04/22/26	00:57	3.6	11.3	6.0	5.9	26,199,629.0	828.3	75.4	14.4	0.017	4.5	4.5	15.0
04/22/26	00:58	3.6	11.8	6.1	6.2	26,308,178.4	829.6	75.4	14.2	0.017	4.5	4.5	15.0
04/22/26	00:59	3.6	10.8	5.6	5.6	26,198,413.6	829.9	75.5	14.2	0.017	4.5	4.5	15.0
04/22/26	01:00	3.6	11.4	6.2	6.0	26,295,903.5	829.1	75.4	14.2	0.017	4.5	4.5	15.0
04/22/26	01:01	3.6	12.8	6.6	6.6	26,292,310.5	831.1	75.5	14.1	0.016	4.4	4.4	15.0
04/22/26	01:02	3.6	11.5	6.2	6.1	25,968,876.2	827.9	75.5	13.6	0.016	4.4	4.4	14.9
04/22/26	01:03	3.6	12.8	6.6	6.7	26,255,311.6	829.6	75.5	13.7	0.016	4.4	4.4	15.0
04/22/26	01:04	3.6	11.5	6.1	6.1	26,203,911.7	830.8	75.5	14.3	0.017	4.5	4.5	15.0
04/22/26	01:05	3.6	10.8	5.7	5.7	25,988,949.2	829.2	75.5	13.9	0.016	4.5	4.4	14.9
04/22/26	01:06	3.6	10.7	5.7	5.7	26,280,232.2	830.6	75.5	14.1	0.017	4.5	4.5	15.0
04/22/26	01:07	3.6	11.0	5.9	5.8	25,991,524.5	828.9	75.4	13.7	0.016	4.5	4.4	14.9
04/22/26	01:08	3.6	11.1	5.8	5.9	26,183,144.7	829.1	75.5	14.1	0.017	4.5	4.4	15.0
04/22/26	01:09	3.6	11.3	5.9	5.9	26,560,605.7	833.0	75.5	14.3	0.017	4.5	4.5	15.0
End R9		3.60	11.54	6.07	6.04	26,186,694	829.8	75.5	14.00	0.02	4.48	4.44	14.96
04/22/26	01:10	3.6	11.4	6.2	6.0	26,020,882.8	828.6	75.5	13.8	0.016	4.4	4.4	14.9
04/22/26	01:11	3.6	11.1	5.8	5.9	26,124,751.2	831.8	75.7	13.7	0.016	4.4	4.3	14.9
04/22/26	01:12	3.6	11.2	6.0	5.9	26,254,874.4	831.7	75.6	14.3	0.017	4.5	4.4	15.0
04/22/26	01:13	3.6	10.5	5.7	5.6	26,107,313.1	829.3	75.5	13.8	0.016	4.5	4.4	14.9
04/22/26	01:14	3.6	12.1	6.4	6.4	26,186,235.3	831.3	75.5	14.1	0.016	4.5	4.5	14.9
04/22/26	01:15	3.6	11.7	6.0	6.0	26,228,783.1	831.0	75.5	14.0	0.016	4.4	4.4	15.0
04/22/26	01:16	3.6	11.4	6.2	6.0	25,986,506.4	827.8	75.4	13.6	0.016	4.5	4.4	14.9
04/22/26	01:17	3.6	11.7	6.0	6.1	26,190,909.4	831.5	75.4	14.0	0.016	4.4	4.4	15.0
04/22/26	01:18	3.6	11.2	5.9	5.9	26,113,901.3	830.0	75.5	13.8	0.016	4.4	4.4	14.9
04/22/26	01:19	3.6	10.1	5.3	5.3	26,090,582.7	828.8	75.4	13.9	0.017	4.5	4.4	15.0
04/22/26	01:20	3.6	10.5	5.4	5.4	26,272,705.7	831.2	75.4	14.1	0.017	4.5	4.5	15.0
04/22/26	01:21	3.6	10.5	5.6	5.5	25,943,567.6	828.4	75.4	13.8	0.016	4.5	4.5	14.9
04/22/26	01:22	3.6	10.7	5.7	5.6	26,111,708.1	830.0	75.5	14.4	0.016	4.5	4.5	14.9
04/22/26	01:23	3.6	10.7	5.5	5.5	26,169,596.1	830.3	75.5	14.2	0.017	4.5	4.5	15.0
04/22/26	01:24	3.6	11.0	5.9	5.7	26,113,738.6	829.0	75.5	13.9	0.017	4.5	4.5	15.0
04/22/26	01:25	3.6	11.3	5.9	5.9	26,118,864.6	830.5	75.4	14.0	0.016	4.5	4.4	14.9
04/22/26	01:26	3.6	10.9	5.8	5.8	26,076,691.9	829.4	75.3	14.1	0.016	4.5	4.5	14.9
04/22/26	01:27	3.6	10.9	5.8	5.8	25,923,788.2	827.5	75.4	13.6	0.016	4.4	4.4	14.9
04/22/26	01:28	3.6	10.3	5.5	5.4	26,011,625.6	831.6	75.5	13.7	0.016	4.5	4.4	14.9
04/22/26	01:29	3.6	9.5	5.2	5.1	26,029,904.6	829.7	75.6	13.7	0.016	4.5	4.4	14.9
04/22/26	01:30	3.6	10.0	5.3	5.3	26,001,580.6	829.9	75.5	13.8	0.016	4.5	4.4	14.9
04/22/26	01:31	3.6	10.7	5.6	5.5	25,868,323.2	829.8	75.4	13.9	0.016	4.5	4.4	14.9
04/22/26	01:32	3.6	9.7	5.1	5.1	25,975,965.9	828.5	75.4	13.9	0.016	4.5	4.4	14.9
04/22/26	01:33	3.6	10.7	5.6	5.5	26,180,607.5	830.5	75.5	14.4	0.017	4.5	4.5	15.0
04/22/26	01:34	3.6	10.6	5.6	5.5	25,994,900.6	830.1	75.5	14.1	0.016	4.5	4.5	14.9

F = Unit Offline

E = Exceedance

C = Calibration

S = Substituted

M = Maintenance

T = Out Of Control

* = Suspect

U = Startup

Average Data

Plant: Midway Sunset
Interval: 1 Minute

Type: Roll

Report Period: 04/21/2026 18:50 Through 04/22/2026 02:15
Time Online Criteria: 1 minute(s)

04/22/26	01:35	3.6	10.1	5.3	5.3	26,096,336.1	828.9	75.5	14.2	0.016	4.5	4.5	14.9
04/22/26	01:36	3.6	10.7	5.5	5.6	25,896,054.6	831.9	75.5	14.0	0.016	4.5	4.4	14.9
04/22/26	01:37	3.6	9.3	5.1	4.9	26,047,444.3	830.8	75.6	14.1	0.016	4.5	4.4	14.9
04/22/26	01:38	3.6	10.3	5.5	5.4	26,053,667.0	829.2	75.5	13.9	0.016	4.5	4.4	14.9
R10													
04/22/26	01:39	3.6	11.1	5.8	5.8	26,273,878.4	831.5	75.5	14.4	0.017	4.5	4.5	15.0
04/22/26	01:40	3.6	9.9	5.2	5.3	26,172,297.0	829.0	75.5	14.1	0.017	4.5	4.5	15.0
04/22/26	01:41	3.6	11.1	5.8	5.8	26,154,067.7	830.7	75.6	14.2	0.017	4.5	4.5	15.0
04/22/26	01:42	3.6	10.7	5.6	5.6	26,133,921.7	829.9	75.3	13.7	0.016	4.5	4.4	14.9
04/22/26	01:43	3.6	10.2	5.5	5.4	26,070,948.3	828.7	75.4	13.7	0.016	4.4	4.4	14.9
04/22/26	01:44	3.6	11.6	6.1	6.1	26,380,228.0	831.9	75.7	14.3	0.016	4.4	4.4	15.0
04/22/26	01:45	3.6	10.0	5.1	5.2	26,303,414.4	831.2	75.6	14.4	0.017	4.5	4.5	15.0
04/22/26	01:46	3.6	10.0	5.5	5.3	26,129,151.6	828.2	75.4	14.2	0.017	4.5	4.5	15.0
04/22/26	01:47	3.6	12.5	6.5	6.5	26,354,488.9	831.1	75.5	14.0	0.016	4.4	4.4	15.0
04/22/26	01:48	3.6	10.4	5.3	5.4	26,251,056.1	830.5	75.6	14.1	0.017	4.5	4.4	15.0
04/22/26	01:49	3.6	10.0	5.5	5.3	25,997,254.2	828.7	75.5	13.6	0.016	4.5	4.5	14.9
04/22/26	01:50	3.6	11.1	5.9	5.8	26,166,938.6	831.6	75.4	13.7	0.016	4.4	4.4	14.9
04/22/26	01:51	3.6	11.1	6.0	5.8	25,986,794.3	828.8	75.5	13.7	0.016	4.4	4.4	14.9
04/22/26	01:52	3.6	12.1	6.3	6.3	26,101,341.5	829.9	75.4	14.2	0.016	4.5	4.4	14.9
04/22/26	01:53	3.6	11.0	5.7	5.7	26,043,834.9	830.2	75.5	13.7	0.016	4.5	4.4	14.9
04/22/26	01:54	3.6	11.0	6.0	5.8	26,038,645.2	829.1	75.6	13.8	0.016	4.5	4.4	14.9
04/22/26	01:55	3.6	11.1	5.9	5.8	26,187,864.5	831.5	75.6	14.1	0.016	4.5	4.5	14.9
04/22/26	01:56	3.6	11.0	5.7	5.7	26,119,081.0	831.3	75.5	14.1	0.016	4.5	4.4	14.9
04/22/26	01:57	3.6	10.8	5.7	5.7	25,972,839.4	829.5	75.6	14.1	0.016	4.5	4.5	14.9
04/22/26	01:58	3.6	10.0	5.3	5.3	26,161,366.1	833.3	75.6	13.9	0.016	4.5	4.4	14.9
04/22/26	01:59	3.6	9.9	5.4	5.1	25,801,219.4	828.9	75.4	13.9	0.016	4.5	4.4	14.9
04/22/26	02:00	3.6	9.9	5.1	5.2	26,039,957.5	830.3	75.6	13.7	0.016	4.5	4.4	14.9
04/22/26	02:01	3.6	10.0	5.4	5.3	26,089,170.3	832.2	75.5	14.3	0.016	4.5	4.5	14.9
04/22/26	02:02	3.6	10.1	5.6	5.4	26,063,533.7	829.7	75.5	13.7	0.016	4.5	4.4	14.9
04/22/26	02:03	3.6	12.5	6.5	6.5	25,975,840.4	830.2	75.6	13.7	0.016	4.5	4.4	14.9
04/22/26	02:04	3.6	11.2	6.0	5.9	26,074,361.5	830.0	75.5	14.2	0.017	4.6	4.5	14.9
04/22/26	02:05	3.6	10.6	5.6	5.6	25,898,854.5	828.1	75.4	13.8	0.016	4.5	4.4	14.9
04/22/26	02:06	3.6	10.1	5.4	5.4	26,121,908.8	829.8	75.4	13.9	0.016	4.5	4.4	14.9
04/22/26	02:07	3.6	10.9	5.7	5.7	26,021,461.5	828.3	75.4	13.9	0.016	4.5	4.5	14.9
04/22/26	02:08	3.6	10.1	5.4	5.3	26,127,060.9	829.4	75.5	14.2	0.016	4.5	4.5	14.9
End R9		3.60	10.73	5.68	5.63	26,107,093	830.1	75.5	13.98	0.02	4.49	4.44	14.93
04/22/26	02:09	3.6	10.7 D	5.6	5.6	26,083,724.6	832.5	75.6	14.4 D	0.017	4.6	4.5	14.9
04/22/26	02:10	3.6	9.8 D	5.2	5.1	26,187,663.6	829.2	75.6	14.4 D	0.017	4.6	4.5	15.0
04/22/26	02:11	3.6	10.4 D	5.3	5.4	26,223,686.9	831.7	75.6	14.6 D	0.017	4.5	4.5	15.0
04/22/26	02:12	3.6	10.4 D	5.6	5.4	26,299,675.5	830.5	75.4	14.4 D	0.017	4.5	4.5	15.0
04/22/26	02:13	3.6	11.6 D	6.2	6.1	25,965,133.5	827.7	75.5	13.6 D	0.016	4.4	4.4	14.9
04/22/26	02:14	3.6	11.0 D	5.7	5.7	26,040,411.9	829.8	75.5	13.8 D	0.016	4.4	4.4	14.9
04/22/26	02:15	3.6	11.7 D	6.3	6.1	26,156,812.0	830.1	75.4	13.7 D	0.016	4.4	4.3	15.0
Average		3.7	6.9	3.6	3.6	26,424,044.8	853.2	77.9	14.3	0.016	4.6	4.4	14.8
Minimum		3.6	1.6	0.8	0.7	25,361,671.0	826.7	75.2	12.5	0.015	4.1	4.0	14.6
Maximum		3.8	13.5	7.1	7.1	27,660,324.5	912.2	84.1	17.7	0.020	5.8	5.4	15.0
Summation		1,632.0	3,074.3	1,615.7	1,592.4	11,785,124,000	380,522.3	34,756.7	6,385.3	7,251	2,032.3	1,980.7	6,622.1
Included Data Points		446	446	446	446	446	446	446	446	446	446	446	446
Total number of Data Points		446	446	446	446	446	446	446	446	446	446	446	446

F = Unit Offline
 E = Exceedance
 C = Calibration
 S = Substituted
 M = Maintenance
 T = Out Of Control
 * = Suspect
 U = Startup

Report Generated: 04/15/25

CEMS Time	PDT	Gas Flow Imported from						Gasflow
		Nox Raw K_AI_112.PV	Nox Corr NOXC_A.PV	Nox LBS K_FI_112.PV	CO Raw K_AI_113.PV	CO LBS K_FI_113.PV	O2 K_AI116A.PV	
4/21/26 18:50	21-Apr-26 19:50:00	4.43	4.17	13.61	1.40	2.49	14.59	905.9
4/21/26 18:51	21-Apr-26 19:51:00	4.43	4.17	13.61	1.40	2.47	14.59	904.3
4/21/26 18:52	21-Apr-26 19:52:00	4.42	4.17	13.61	1.40	2.44	14.59	904.9
4/21/26 18:53	21-Apr-26 19:53:00	4.41	4.17	13.61	1.40	2.41	14.59	904.7
4/21/26 18:54	21-Apr-26 19:54:00	4.40	4.17	13.61	1.40	2.38	14.59	904.4
4/21/26 18:55	21-Apr-26 19:55:00	4.39	4.17	13.61	1.40	2.36	14.59	905.8
R1								
4/21/26 18:56	21-Apr-26 19:56:00	4.38	4.17	13.61	1.34	2.32	14.59	905.3
4/21/26 18:57	21-Apr-26 19:57:00	4.37	4.17	13.61	0.88	1.95	14.59	905.0
4/21/26 18:58	21-Apr-26 19:58:00	4.37	4.17	13.61	0.87	1.60	14.59	906.3
4/21/26 18:59	21-Apr-26 19:59:00	4.37	4.17	13.61	0.98	1.60	14.59	906.7
4/21/26 19:00	21-Apr-26 20:00:00	4.37	4.17	13.61	1.05	1.60	14.59	905.9
4/21/26 19:01	21-Apr-26 20:01:00	4.38	4.17	13.61	0.74	1.59	14.59	906.6
4/21/26 19:02	21-Apr-26 20:02:00	4.38	4.17	13.61	0.68	1.57	14.59	907.0
4/21/26 19:03	21-Apr-26 20:03:00	4.38	4.17	13.62	0.69	1.56	14.59	905.9
4/21/26 19:04	21-Apr-26 20:04:00	4.38	4.17	13.62	0.70	1.55	14.59	905.2
4/21/26 19:05	21-Apr-26 20:05:00	4.38	4.17	13.62	0.72	1.53	14.59	906.6
4/21/26 19:06	21-Apr-26 20:06:00	4.38	4.17	13.62	0.73	1.52	14.59	905.4
4/21/26 19:07	21-Apr-26 20:07:00	4.38	4.17	13.62	0.74	1.50	14.59	906.1
4/21/26 19:08	21-Apr-26 20:08:00	4.38	4.17	13.62	0.75	1.49	14.59	905.6
4/21/26 19:09	21-Apr-26 20:09:00	4.38	4.17	13.62	0.77	1.47	14.59	905.0
4/21/26 19:10	21-Apr-26 20:10:00	4.38	4.17	13.62	0.78	1.46	14.59	906.0
4/21/26 19:11	21-Apr-26 20:11:00	4.39	4.17	13.62	0.79	1.44	14.59	903.8
4/21/26 19:12	21-Apr-26 20:12:00	4.39	4.17	13.62	0.80	1.43	14.59	905.2
4/21/26 19:13	21-Apr-26 20:13:00	4.39	4.17	13.62	0.79	1.42	14.59	906.1
4/21/26 19:14	21-Apr-26 20:14:00	4.39	4.17	13.62	0.57	1.29	14.59	904.7
4/21/26 19:15	21-Apr-26 20:15:00	4.39	4.18	13.62	0.71	1.15	14.59	905.0
4/21/26 19:16	21-Apr-26 20:16:00	4.39	4.18	13.62	0.77	1.18	14.59	906.4
4/21/26 19:17	21-Apr-26 20:17:00	4.39	4.18	13.63	0.78	1.22	14.59	904.2
4/21/26 19:18	21-Apr-26 20:18:00	4.39	4.18	13.63	0.79	1.25	14.59	906.1
4/21/26 19:19	21-Apr-26 20:19:00	4.39	4.18	13.63	0.80	1.29	14.59	905.5
4/21/26 19:20	21-Apr-26 20:20:00	4.40	4.18	13.63	0.81	1.32	14.59	904.4
4/21/26 19:21	21-Apr-26 20:21:00	4.40	4.18	13.63	0.81	1.36	14.59	905.5
4/21/26 19:22	21-Apr-26 20:22:00	4.40	4.18	13.63	0.82	1.39	14.59	905.1
4/21/26 19:23	21-Apr-26 20:23:00	4.40	4.18	13.63	0.83	1.43	14.59	902.9
4/21/26 19:24	21-Apr-26 20:24:00	4.40	4.18	13.63	0.84	1.46	14.59	904.6
4/21/26 19:25	21-Apr-26 20:25:00	4.40	4.18	13.63	0.85	1.50	14.59	904.6
End R1		4.39	4.17	13.62	0.81	1.48	14.59	905.42
4/21/26 19:26	21-Apr-26 20:26:00	4.40	4.18	13.63	0.80	1.53	14.59	903.0
4/21/26 19:27	21-Apr-26 20:27:00	4.40	4.18	13.63	0.66	1.57	14.59	905.2
4/21/26 19:28	21-Apr-26 20:28:00	4.40	4.18	13.63	0.80	1.59	14.58	902.6
4/21/26 19:29	21-Apr-26 20:29:00	4.41	4.18	13.63	0.62	1.59	14.54	903.0
4/21/26 19:30	21-Apr-26 20:30:00	4.41	4.18	13.63	0.73	1.59	14.54	906.7
4/21/26 19:31	21-Apr-26 20:31:00	4.41	4.18	13.64	0.84	1.58	14.54	905.7
4/21/26 19:32	21-Apr-26 20:32:00	4.41	4.18	13.63	0.91	1.57	14.54	905.1
4/21/26 19:33	21-Apr-26 20:33:00	4.41	4.18	13.63	0.91	1.56	14.55	906.5
4/21/26 19:34	21-Apr-26 20:34:00	4.41	4.18	13.62	0.91	1.55	14.55	905.8
4/21/26 19:35	21-Apr-26 20:35:00	4.41	4.18	13.62	0.91	1.53	14.55	905.7
4/21/26 19:36	21-Apr-26 20:36:00	4.41	4.18	13.61	0.91	1.52	14.55	907.4
4/21/26 19:37	21-Apr-26 20:37:00	4.41	4.18	13.61	0.91	1.51	14.55	905.9
4/21/26 19:38	21-Apr-26 20:38:00	4.42	4.18	13.60	0.91	1.50	14.55	907.5
R2								
4/21/26 19:39	21-Apr-26 20:39:00	4.42	4.18	13.59	0.91	1.49	14.55	906.0
4/21/26 19:40	21-Apr-26 20:40:00	4.42	4.18	13.59	0.91	1.47	14.56	905.6
4/21/26 19:41	21-Apr-26 20:41:00	4.42	4.18	13.58	0.91	1.46	14.56	907.8
4/21/26 19:42	21-Apr-26 20:42:00	4.42	4.18	13.58	0.75	1.45	14.56	906.0
4/21/26 19:43	21-Apr-26 20:43:00	4.42	4.18	13.57	0.73	1.44	14.57	905.7
4/21/26 19:44	21-Apr-26 20:44:00	4.42	4.18	13.57	0.79	1.43	14.62	906.9
4/21/26 19:45	21-Apr-26 20:45:00	4.42	4.18	13.56	0.77	1.42	14.61	904.9
4/21/26 19:46	21-Apr-26 20:46:00	4.42	4.18	13.56	0.46	1.41	14.61	905.2
4/21/26 19:47	21-Apr-26 20:47:00	4.42	4.18	13.55	0.48	1.41	14.61	906.1
4/21/26 19:48	21-Apr-26 20:48:00	4.42	4.18	13.55	0.50	1.41	14.61	904.7
4/21/26 19:49	21-Apr-26 20:49:00	4.42	4.18	13.54	0.52	1.41	14.61	905.4
4/21/26 19:50	21-Apr-26 20:50:00	4.42	4.18	13.53	0.54	1.41	14.61	905.9
4/21/26 19:51	21-Apr-26 20:51:00	4.42	4.18	13.53	0.56	1.41	14.61	906.6
4/21/26 19:52	21-Apr-26 20:52:00	4.42	4.18	13.52	0.58	1.41	14.61	905.8
4/21/26 19:53	21-Apr-26 20:53:00	4.42	4.18	13.52	0.60	1.42	14.61	907.2
4/21/26 19:54	21-Apr-26 20:54:00	4.42	4.18	13.51	0.62	1.42	14.61	905.8
4/21/26 19:55	21-Apr-26 20:55:00	4.42	4.19	13.51	0.64	1.42	14.61	908.4
4/21/26 19:56	21-Apr-26 20:56:00	4.42	4.19	13.50	0.66	1.42	14.61	907.8

4/21/26 19:57	21-Apr-26 20:57:00	4.42	4.19	13.50	0.90	1.61	14.61	907.6
4/21/26 19:58	21-Apr-26 20:58:00	4.42	4.19	13.50	0.70	1.63	14.61	909.1
4/21/26 19:59	21-Apr-26 20:59:00	4.42	4.19	13.50	0.81	1.37	14.61	908.5
4/21/26 20:00	21-Apr-26 21:00:00	4.43	4.19	13.51	0.84	1.37	14.61	907.3
4/21/26 20:01	21-Apr-26 21:01:00	4.43	4.19	13.52	0.78	1.41	14.61	909.4
4/21/26 20:02	21-Apr-26 21:02:00	4.43	4.19	13.53	0.77	1.45	14.61	907.6
4/21/26 20:03	21-Apr-26 21:03:00	4.43	4.19	13.54	0.77	1.49	14.61	907.5
4/21/26 20:04	21-Apr-26 21:04:00	4.43	4.19	13.55	0.77	1.53	14.60	908.9
4/21/26 20:05	21-Apr-26 21:05:00	4.44	4.19	13.56	0.77	1.57	14.60	908.9
4/21/26 20:06	21-Apr-26 21:06:00	4.44	4.19	13.56	0.77	1.62	14.60	909.1
4/21/26 20:07	21-Apr-26 21:07:00	4.44	4.19	13.57	0.77	1.66	14.60	910.4
4/21/26 20:08	21-Apr-26 21:08:00	4.44	4.19	13.58	0.77	1.70	14.60	908.5
End R2		4.42	4.18	13.54	0.71	1.47	14.60	907.15
4/21/26 20:09	21-Apr-26 21:09:00	4.45	4.19	13.59	0.77	1.74	14.60	909.5
4/21/26 20:10	21-Apr-26 21:10:00	4.45	4.19	13.60	0.77	1.78	14.60	908.7
4/21/26 20:11	21-Apr-26 21:11:00	4.45	4.19	13.61	0.77	1.82	14.60	909.7
4/21/26 20:12	21-Apr-26 21:12:00	4.45	4.19	13.62	0.89	1.83	14.60	910.2
4/21/26 20:13	21-Apr-26 21:13:00	4.45	4.19	13.62	0.63	1.48	14.60	908.6
4/21/26 20:14	21-Apr-26 21:14:00	4.44	4.19	13.63	0.49	1.07	14.60	909.3
4/21/26 20:15	21-Apr-26 21:15:00	4.43	4.19	13.64	0.71	1.07	14.60	910.9
4/21/26 20:16	21-Apr-26 21:16:00	4.43	4.19	13.65	0.91	1.32	14.60	907.9
4/21/26 20:17	21-Apr-26 21:17:00	4.42	4.19	13.66	0.94	1.55	14.60	909.3
4/21/26 20:18	21-Apr-26 21:18:00	4.42	4.19	13.67	0.92	1.60	14.60	910.9
4/21/26 20:19	21-Apr-26 21:19:00	4.41	4.19	13.68	0.90	1.60	14.60	909.0
4/21/26 20:20	21-Apr-26 21:20:00	4.41	4.19	13.68	0.89	1.60	14.60	910.7
R3								
4/21/26 20:21	21-Apr-26 21:21:00	4.40	4.19	13.69	0.87	1.59	14.60	910.1
4/21/26 20:22	21-Apr-26 21:22:00	4.40	4.19	13.70	0.85	1.59	14.60	909.2
4/21/26 20:23	21-Apr-26 21:23:00	4.39	4.19	13.71	0.84	1.59	14.59	910.6
4/21/26 20:24	21-Apr-26 21:24:00	4.38	4.19	13.72	0.82	1.59	14.59	909.2
4/21/26 20:25	21-Apr-26 21:25:00	4.38	4.19	13.73	0.80	1.59	14.59	908.9
4/21/26 20:26	21-Apr-26 21:26:00	4.37	4.19	13.74	0.79	1.59	14.59	911.4
4/21/26 20:27	21-Apr-26 21:27:00	4.41	4.19	13.74	0.77	1.59	14.59	908.5
4/21/26 20:28	21-Apr-26 21:28:00	4.46	4.19	13.75	0.80	1.59	14.59	909.0
4/21/26 20:29	21-Apr-26 21:29:00	4.46	4.19	13.76	0.82	1.59	14.59	910.3
4/21/26 20:30	21-Apr-26 21:30:00	4.46	4.19	13.77	0.74	1.59	14.59	908.8
4/21/26 20:31	21-Apr-26 21:31:00	4.46	4.19	13.78	0.66	1.59	14.59	909.4
4/21/26 20:32	21-Apr-26 21:32:00	4.46	4.19	13.79	0.62	1.59	14.59	910.0
4/21/26 20:33	21-Apr-26 21:33:00	4.46	4.19	13.80	0.64	1.59	14.59	908.8
4/21/26 20:34	21-Apr-26 21:34:00	4.47	4.20	13.80	0.65	1.59	14.59	911.2
4/21/26 20:35	21-Apr-26 21:35:00	4.47	4.20	13.81	0.67	1.60	14.59	910.7
4/21/26 20:36	21-Apr-26 21:36:00	4.47	4.20	13.82	0.68	1.60	14.59	909.9
4/21/26 20:37	21-Apr-26 21:37:00	4.47	4.20	13.83	0.70	1.60	14.59	911.3
4/21/26 20:38	21-Apr-26 21:38:00	4.47	4.20	13.84	0.71	1.60	14.59	909.7
4/21/26 20:39	21-Apr-26 21:39:00	4.47	4.20	13.85	0.73	1.60	14.59	910.1
4/21/26 20:40	21-Apr-26 21:40:00	4.48	4.20	13.86	0.74	1.60	14.59	911.7
4/21/26 20:41	21-Apr-26 21:41:00	4.48	4.20	13.86	0.76	1.60	14.59	909.5
4/21/26 20:42	21-Apr-26 21:42:00	4.55	4.20	13.86	1.01	1.80	14.58	911.4
4/21/26 20:43	21-Apr-26 21:43:00	4.54	4.20	13.83	0.87	1.41	14.58	909.7
4/21/26 20:44	21-Apr-26 21:44:00	4.49	4.20	13.79	0.97	1.73	14.58	910.0
4/21/26 20:45	21-Apr-26 21:45:00	4.45	4.20	13.76	0.92	1.83	14.58	910.8
4/21/26 20:46	21-Apr-26 21:46:00	4.45	4.20	13.72	0.93	1.79	14.58	909.4
4/21/26 20:47	21-Apr-26 21:47:00	4.45	4.20	13.68	0.77	1.76	14.58	911.3
4/21/26 20:48	21-Apr-26 21:48:00	4.44	4.20	13.64	0.77	1.72	14.58	910.0
4/21/26 20:49	21-Apr-26 21:49:00	4.44	4.20	13.61	0.77	1.69	14.58	908.7
4/21/26 20:50	21-Apr-26 21:50:00	4.44	4.20	13.57	0.77	1.65	14.58	910.7
End R3		4.45	4.20	13.76	0.78	1.63	14.59	910.01
4/21/26 20:51	21-Apr-26 21:51:00	4.43	4.20	13.53	0.77	1.61	14.57	910.0
4/21/26 20:52	21-Apr-26 21:52:00	4.43	4.20	13.49	0.77	1.58	14.57	910.2
4/21/26 20:53	21-Apr-26 21:53:00	4.43	4.20	13.46	0.77	1.54	14.57	912.2
4/21/26 20:54	21-Apr-26 21:54:00	4.43	4.20	13.42	0.77	1.51	14.57	910.2
4/21/26 20:55	21-Apr-26 21:55:00	4.42	4.20	13.38	0.77	1.47	14.57	910.8
4/21/26 20:56	21-Apr-26 21:56:00	4.42	4.20	13.34	0.82	1.46	14.56	909.5
4/21/26 20:57	21-Apr-26 21:57:00	4.47	4.20	13.31	0.94	1.94	14.56	908.2
4/21/26 20:58	21-Apr-26 21:58:00	4.49	4.20	13.27	1.01	1.95	14.56	909.5
4/21/26 20:59	21-Apr-26 21:59:00	4.47	4.20	13.23	0.93	1.95	14.56	908.2
4/21/26 21:00	21-Apr-26 22:00:00	4.44	4.20	13.20	1.06	1.95	14.55	908.3
4/21/26 21:01	21-Apr-26 22:01:00	4.42	4.20	13.16	1.01	1.95	14.55	908.1
4/21/26 21:02	21-Apr-26 22:02:00	4.43	4.20	13.12	1.02	1.95	14.55	904.7
4/21/26 21:03	21-Apr-26 22:03:00	4.43	4.20	13.04	1.03	1.95	14.55	865.7
4/21/26 21:04	21-Apr-26 22:04:00	4.43	4.20	12.88	1.05	1.95	14.55	843.4
4/21/26 21:05	21-Apr-26 22:05:00	4.43	4.20	12.73	1.06	1.96	14.54	829.3
4/21/26 21:06	21-Apr-26 22:06:00	4.44	4.20	12.58	1.07	1.96	14.54	832.5
4/21/26 21:07	21-Apr-26 22:07:00	4.44	4.20	12.45	1.09	1.96	14.54	831.7
4/21/26 21:08	21-Apr-26 22:08:00	4.44	4.20	12.44	1.10	1.96	14.54	831.1

4/21/26 21:09	21-Apr-26 22:09:00	4.45	4.20	12.47	1.11	1.96	14.54	832.6
4/21/26 21:10	21-Apr-26 22:10:00	4.45	4.20	12.49	1.13	1.96	14.53	830.3
R4								
4/21/26 21:11	21-Apr-26 22:11:00	4.44	4.20	12.43	1.23	2.14	14.53	831.0
4/21/26 21:12	21-Apr-26 22:12:00	4.34	4.17	11.69	2.34	4.12	14.53	832.2
4/21/26 21:13	21-Apr-26 22:13:00	4.22	4.13	11.69	2.35	3.99	14.60	828.3
4/21/26 21:14	21-Apr-26 22:14:00	4.23	4.11	11.69	2.48	4.13	14.84	830.0
4/21/26 21:15	21-Apr-26 22:15:00	4.25	4.11	11.69	2.50	4.38	14.84	831.7
4/21/26 21:16	21-Apr-26 22:16:00	4.25	4.11	11.69	2.77	4.51	14.84	829.2
4/21/26 21:17	21-Apr-26 22:17:00	4.26	4.12	11.69	2.55	4.32	14.84	833.0
4/21/26 21:18	21-Apr-26 22:18:00	4.27	4.12	11.69	2.55	4.33	14.84	831.8
4/21/26 21:19	21-Apr-26 22:19:00	4.28	4.12	11.70	2.55	4.35	14.84	829.1
4/21/26 21:20	21-Apr-26 22:20:00	4.29	4.12	11.70	2.55	4.36	14.83	831.3
4/21/26 21:21	21-Apr-26 22:21:00	4.30	4.12	11.70	2.55	4.37	14.83	828.7
4/21/26 21:22	21-Apr-26 22:22:00	4.31	4.12	11.70	2.55	4.39	14.83	832.1
4/21/26 21:23	21-Apr-26 22:23:00	4.32	4.12	11.70	2.55	4.40	14.83	830.3
4/21/26 21:24	21-Apr-26 22:24:00	4.33	4.12	11.70	2.55	4.41	14.83	829.7
4/21/26 21:25	21-Apr-26 22:25:00	4.33	4.13	11.70	2.55	4.43	14.83	832.3
4/21/26 21:26	21-Apr-26 22:26:00	4.34	4.13	11.71	2.64	4.46	14.83	833.0
4/21/26 21:27	21-Apr-26 22:27:00	4.30	4.13	11.71	2.78	4.55	14.83	830.3
4/21/26 21:28	21-Apr-26 22:28:00	4.18	4.13	11.71	2.26	3.88	14.83	832.8
4/21/26 21:29	21-Apr-26 22:29:00	4.09	4.13	11.72	2.62	4.46	14.83	831.9
4/21/26 21:30	21-Apr-26 22:30:00	4.17	4.15	11.74	2.54	4.42	14.83	829.9
4/21/26 21:31	21-Apr-26 22:31:00	4.18	4.16	11.76	2.49	4.44	14.82	832.9
4/21/26 21:32	21-Apr-26 22:32:00	4.22	4.17	11.78	2.66	4.41	14.82	829.3
4/21/26 21:33	21-Apr-26 22:33:00	4.22	4.19	11.80	2.64	4.48	14.82	829.5
4/21/26 21:34	21-Apr-26 22:34:00	4.22	4.20	11.83	2.62	4.55	14.82	832.5
4/21/26 21:35	21-Apr-26 22:35:00	4.22	4.21	11.85	2.61	4.61	14.82	830.4
4/21/26 21:36	21-Apr-26 22:36:00	4.22	4.22	11.87	2.59	4.68	14.82	832.2
4/21/26 21:37	21-Apr-26 22:37:00	4.21	4.24	11.89	2.57	4.75	14.82	831.1
4/21/26 21:38	21-Apr-26 22:38:00	4.21	4.25	11.91	2.55	4.81	14.82	829.9
4/21/26 21:39	21-Apr-26 22:39:00	4.21	4.26	11.94	2.54	4.88	14.82	832.1
4/21/26 21:40	21-Apr-26 22:40:00	4.21	4.28	11.96	2.52	4.95	14.82	829.5
End R4		4.25	4.16	11.78	2.51	4.37	14.80	830.93
4/21/26 21:41	21-Apr-26 22:41:00	4.21	4.29	11.98	2.50	5.01	14.82	828.7
4/21/26 21:42	21-Apr-26 22:42:00	4.20	4.30	12.00	2.79	4.65	14.81	831.9
4/21/26 21:43	21-Apr-26 22:43:00	4.24	4.31	12.03	2.64	4.51	14.81	827.7
4/21/26 21:44	21-Apr-26 22:44:00	4.25	4.26	11.98	2.77	4.82	14.81	828.2
4/21/26 21:45	21-Apr-26 22:45:00	4.23	4.15	11.77	2.58	4.38	14.81	832.3
4/21/26 21:46	21-Apr-26 22:46:00	4.41	4.25	12.26	2.67	4.55	14.82	829.2
4/21/26 21:47	21-Apr-26 22:47:00	4.45	4.34	12.37	2.86	4.81	14.82	827.7
4/21/26 21:48	21-Apr-26 22:48:00	4.44	4.34	12.35	2.85	4.76	14.82	829.7
4/21/26 21:49	21-Apr-26 22:49:00	4.43	4.34	12.32	2.85	4.72	14.82	828.8
4/21/26 21:50	21-Apr-26 22:50:00	4.42	4.34	12.30	2.84	4.67	14.82	830.2
4/21/26 21:51	21-Apr-26 22:51:00	4.41	4.34	12.27	2.84	4.63	14.82	830.2
4/21/26 21:52	21-Apr-26 22:52:00	4.40	4.34	12.25	2.83	4.59	14.82	830.4
4/21/26 21:53	21-Apr-26 22:53:00	4.40	4.34	12.22	2.83	4.54	14.83	833.7
4/21/26 21:54	21-Apr-26 22:54:00	4.39	4.34	12.20	2.82	4.50	14.83	827.7
4/21/26 21:55	21-Apr-26 22:55:00	4.38	4.34	12.17	2.82	4.45	14.83	830.2
R5								
4/21/26 21:56	21-Apr-26 22:56:00	4.28	4.25	12.00	2.76	4.41	14.83	830.8
4/21/26 21:57	21-Apr-26 22:57:00	4.03	3.90	11.07	2.32	3.91	14.83	830.5
4/21/26 21:58	21-Apr-26 22:58:00	4.08	3.97	11.21	2.55	4.33	14.83	829.9
4/21/26 21:59	21-Apr-26 22:59:00	3.96	3.78	11.05	2.31	3.89	14.79	831.2
4/21/26 22:00	21-Apr-26 23:00:00	3.93	3.90	11.26	2.86	4.60	14.74	829.2
4/21/26 22:01	21-Apr-26 23:01:00	3.93	3.94	11.09	2.62	4.47	14.74	830.1
4/21/26 22:02	21-Apr-26 23:02:00	4.04	3.95	11.07	2.86	4.90	14.74	830.2
4/21/26 22:03	21-Apr-26 23:03:00	4.05	3.96	11.09	2.86	4.90	14.75	830.8
4/21/26 22:04	21-Apr-26 23:04:00	4.05	3.97	11.10	2.85	4.90	14.75	831.3
4/21/26 22:05	21-Apr-26 23:05:00	4.06	3.98	11.12	2.85	4.90	14.75	829.0
4/21/26 22:06	21-Apr-26 23:06:00	4.07	3.99	11.13	2.84	4.90	14.75	829.1
4/21/26 22:07	21-Apr-26 23:07:00	4.08	4.00	11.15	2.84	4.90	14.76	831.6
4/21/26 22:08	21-Apr-26 23:08:00	4.09	4.01	11.16	2.83	4.90	14.76	829.1
4/21/26 22:09	21-Apr-26 23:09:00	4.10	4.02	11.18	2.83	4.91	14.76	830.1
4/21/26 22:10	21-Apr-26 23:10:00	4.11	4.03	11.19	2.82	4.91	14.76	828.9
4/21/26 22:11	21-Apr-26 23:11:00	4.12	4.04	11.22	2.82	4.91	14.77	828.5
4/21/26 22:12	21-Apr-26 23:12:00	4.14	4.05	11.69	2.81	4.91	14.77	830.8
4/21/26 22:13	21-Apr-26 23:13:00	4.16	4.06	11.84	2.83	4.91	14.77	830.9
4/21/26 22:14	21-Apr-26 23:14:00	4.18	4.08	11.84	2.85	4.91	14.77	830.0
4/21/26 22:15	21-Apr-26 23:15:00	4.18	4.09	11.84	2.88	4.91	14.78	831.4
4/21/26 22:16	21-Apr-26 23:16:00	4.15	4.10	11.84	3.12	5.18	14.78	829.0
4/21/26 22:17	21-Apr-26 23:17:00	4.20	4.11	11.84	3.32	5.84	14.78	827.0
4/21/26 22:18	21-Apr-26 23:18:00	4.20	4.12	11.85	3.33	5.85	14.79	829.8
4/21/26 22:19	21-Apr-26 23:19:00	4.19	4.13	11.85	3.35	5.86	14.79	830.1
4/21/26 22:20	21-Apr-26 23:20:00	4.19	4.14	11.85	3.36	5.87	14.79	831.4

4/21/26 22:21	21-Apr-26 23:21:00	4.18	4.15	11.85	3.38	5.87	14.79	830.5
4/21/26 22:22	21-Apr-26 23:22:00	4.18	4.16	11.85	3.39	5.88	14.80	827.6
4/21/26 22:23	21-Apr-26 23:23:00	4.17	4.17	11.85	3.41	5.89	14.80	829.5
4/21/26 22:24	21-Apr-26 23:24:00	4.17	4.18	11.85	3.42	5.90	14.80	830.0
4/21/26 22:25	21-Apr-26 23:25:00	4.16	4.19	11.85	3.44	5.90	14.80	827.8
End R5		4.11	4.05	11.49	2.96	5.08	14.78	829.87
4/21/26 22:26	21-Apr-26 23:26:00	4.16	4.20	11.85	3.32	5.75	14.81	832.0
4/21/26 22:27	21-Apr-26 23:27:00	4.18	4.22	11.85	2.58	4.39	14.81	829.3
4/21/26 22:28	21-Apr-26 23:28:00	4.12	4.07	11.60	2.90	5.18	14.79	828.5
4/21/26 22:29	21-Apr-26 23:29:00	4.16	4.08	11.86	2.84	4.79	14.75	830.9
4/21/26 22:30	21-Apr-26 23:30:00	4.08	4.01	11.57	3.06	5.00	14.76	827.9
4/21/26 22:31	21-Apr-26 23:31:00	4.07	4.01	11.48	3.12	5.31	14.76	828.1
4/21/26 22:32	21-Apr-26 23:32:00	4.07	4.00	11.46	2.72	4.64	14.77	829.3
4/21/26 22:33	21-Apr-26 23:33:00	4.07	4.00	11.44	2.72	4.63	14.77	827.0
4/21/26 22:34	21-Apr-26 23:34:00	4.07	4.00	11.42	2.71	4.62	14.78	829.4
4/21/26 22:35	21-Apr-26 23:35:00	4.07	4.00	11.40	2.71	4.62	14.78	827.2
4/21/26 22:36	21-Apr-26 23:36:00	4.07	4.00	11.38	2.71	4.61	14.79	826.7
4/21/26 22:37	21-Apr-26 23:37:00	4.06	4.00	11.36	2.71	4.61	14.79	829.6
R6								
4/21/26 22:38	21-Apr-26 23:38:00	4.06	4.00	11.34	2.71	4.60	14.80	827.8
4/21/26 22:39	21-Apr-26 23:39:00	4.06	3.99	11.32	2.71	4.60	14.80	828.0
4/21/26 22:40	21-Apr-26 23:40:00	4.06	3.99	11.30	2.71	4.59	14.81	831.0
4/21/26 22:41	21-Apr-26 23:41:00	4.10	4.00	11.37	2.87	4.86	14.81	829.1
4/21/26 22:42	21-Apr-26 23:42:00	4.27	4.09	12.03	3.37	5.69	14.82	831.0
4/21/26 22:43	21-Apr-26 23:43:00	4.24	4.20	12.02	3.15	5.40	14.82	828.8
4/21/26 22:44	21-Apr-26 23:44:00	4.28	4.26	12.01	3.68	6.16	14.83	828.3
4/21/26 22:45	21-Apr-26 23:45:00	4.20	4.25	12.00	3.61	6.17	14.83	830.1
4/21/26 22:46	21-Apr-26 23:46:00	4.24	4.25	11.99	3.53	5.65	14.82	829.2
4/21/26 22:47	21-Apr-26 23:47:00	4.25	4.25	11.99	3.53	5.68	14.81	829.6
4/21/26 22:48	21-Apr-26 23:48:00	4.25	4.25	11.98	3.53	5.70	14.81	828.7
4/21/26 22:49	21-Apr-26 23:49:00	4.26	4.24	11.97	3.52	5.73	14.81	829.3
4/21/26 22:50	21-Apr-26 23:50:00	4.26	4.24	11.96	3.52	5.76	14.80	827.5
4/21/26 22:51	21-Apr-26 23:51:00	4.26	4.24	11.95	3.51	5.79	14.80	829.3
4/21/26 22:52	21-Apr-26 23:52:00	4.26	4.24	11.94	3.51	5.81	14.80	827.8
4/21/26 22:53	21-Apr-26 23:53:00	4.26	4.23	11.94	3.50	5.84	14.80	830.6
4/21/26 22:54	21-Apr-26 23:54:00	4.27	4.23	11.93	3.50	5.87	14.79	828.4
4/21/26 22:55	21-Apr-26 23:55:00	4.27	4.23	11.92	3.50	5.90	14.79	828.1
4/21/26 22:56	21-Apr-26 23:56:00	4.21	4.17	11.87	3.63	6.21	14.79	830.0
4/21/26 22:57	21-Apr-26 23:57:00	3.98	3.95	11.14	3.85	6.51	14.79	829.0
4/21/26 22:58	21-Apr-26 23:58:00	3.99	3.96	11.06	4.20	7.26	14.79	827.0
4/21/26 22:59	21-Apr-26 23:59:00	4.00	3.98	10.99	3.94	6.82	14.78	831.7
4/21/26 23:00	22-Apr-26 00:00:00	4.05	4.00	11.00	4.17	7.51	14.78	830.6
4/21/26 23:01	22-Apr-26 00:01:00	4.14	4.02	11.28	3.78	6.43	14.82	830.4
4/21/26 23:02	22-Apr-26 00:02:00	4.23	4.04	11.57	3.80	6.45	14.85	830.1
4/21/26 23:03	22-Apr-26 00:03:00	4.25	4.06	11.83	3.82	6.48	14.85	827.9
4/21/26 23:04	22-Apr-26 00:04:00	4.25	4.08	11.84	3.84	6.51	14.85	829.1
4/21/26 23:05	22-Apr-26 00:05:00	4.25	4.10	11.78	3.86	6.55	14.85	829.6
4/21/26 23:06	22-Apr-26 00:06:00	4.25	4.12	11.73	3.89	6.58	14.85	828.2
4/21/26 23:07	22-Apr-26 00:07:00	4.25	4.14	11.67	3.91	6.61	14.85	830.6
End R6		4.19	4.13	11.69	3.55	5.99	14.81	829.23
4/21/26 23:08	22-Apr-26 00:08:00	4.25	4.16	11.62	3.93	6.65	14.85	829.9
4/21/26 23:09	22-Apr-26 00:09:00	4.25	4.18	11.56	3.95	6.68	14.85	828.7
4/21/26 23:10	22-Apr-26 00:10:00	4.25	4.20	11.51	3.98	6.71	14.85	830.5
4/21/26 23:11	22-Apr-26 00:11:00	4.23	4.21	11.45	4.00	6.75	14.85	828.6
4/21/26 23:12	22-Apr-26 00:12:00	4.08	4.14	11.40	3.98	6.78	14.85	829.1
4/21/26 23:13	22-Apr-26 00:13:00	4.07	4.05	11.38	3.70	6.44	14.83	829.8
4/21/26 23:14	22-Apr-26 00:14:00	4.02	3.95	11.37	4.14	6.89	14.79	827.4
4/21/26 23:15	22-Apr-26 00:15:00	4.00	3.90	11.37	4.19	6.76	14.81	831.7
4/21/26 23:16	22-Apr-26 00:16:00	4.06	3.92	11.38	4.22	7.10	14.83	829.9
4/21/26 23:17	22-Apr-26 00:17:00	4.06	3.93	11.40	4.36	6.91	14.83	827.5
4/21/26 23:18	22-Apr-26 00:18:00	4.07	3.95	11.41	4.36	6.97	14.83	831.2
R7								
4/21/26 23:19	22-Apr-26 00:19:00	4.07	3.96	11.43	4.35	7.03	14.83	829.0
4/21/26 23:20	22-Apr-26 00:20:00	4.08	3.97	11.45	4.35	7.09	14.83	828.4
4/21/26 23:21	22-Apr-26 00:21:00	4.08	3.99	11.47	4.35	7.14	14.83	829.9
4/21/26 23:22	22-Apr-26 00:22:00	4.09	4.00	11.48	4.35	7.20	14.83	828.7
4/21/26 23:23	22-Apr-26 00:23:00	4.10	4.01	11.50	4.35	7.26	14.83	828.2
4/21/26 23:24	22-Apr-26 00:24:00	4.10	4.03	11.52	4.35	7.32	14.83	829.3
4/21/26 23:25	22-Apr-26 00:25:00	4.11	4.04	11.53	4.35	7.38	14.83	829.5
4/21/26 23:26	22-Apr-26 00:26:00	4.11	4.06	11.64	4.35	7.34	14.83	830.9
4/21/26 23:27	22-Apr-26 00:27:00	4.12	4.07	11.75	4.47	7.65	14.83	829.0
4/21/26 23:28	22-Apr-26 00:28:00	4.12	4.08	11.53	3.98	6.57	14.82	828.3
4/21/26 23:29	22-Apr-26 00:29:00	4.13	4.10	11.55	4.17	6.91	14.80	832.5
4/21/26 23:30	22-Apr-26 00:30:00	4.13	4.10	11.57	4.14	6.73	14.82	827.9
4/21/26 23:31	22-Apr-26 00:31:00	4.14	4.10	11.58	4.14	6.97	14.82	828.5

4/21/26 23:32	22-Apr-26 00:32:00	4.14	4.10	11.60	4.16	6.70	14.82	831.8
4/21/26 23:33	22-Apr-26 00:33:00	4.15	4.10	11.62	4.16	6.73	14.82	829.7
4/21/26 23:34	22-Apr-26 00:34:00	4.16	4.10	11.64	4.16	6.77	14.82	832.6
4/21/26 23:35	22-Apr-26 00:35:00	4.16	4.10	11.66	4.16	6.80	14.81	828.3
4/21/26 23:36	22-Apr-26 00:36:00	4.17	4.10	11.68	4.16	6.83	14.81	827.5
4/21/26 23:37	22-Apr-26 00:37:00	4.17	4.10	11.70	4.16	6.86	14.81	830.1
4/21/26 23:38	22-Apr-26 00:38:00	4.18	4.09	11.72	4.16	6.89	14.81	830.1
4/21/26 23:39	22-Apr-26 00:39:00	4.18	4.09	11.74	4.16	6.92	14.81	831.3
4/21/26 23:40	22-Apr-26 00:40:00	4.19	4.09	11.76	4.16	6.95	14.80	831.2
4/21/26 23:41	22-Apr-26 00:41:00	4.19	4.09	11.78	4.04	6.93	14.80	830.3
4/21/26 23:42	22-Apr-26 00:42:00	4.20	4.09	11.80	3.64	5.88	14.80	832.6
4/21/26 23:43	22-Apr-26 00:43:00	4.17	4.09	11.77	3.38	5.87	14.80	831.7
4/21/26 23:44	22-Apr-26 00:44:00	4.10	4.09	11.67	3.59	5.92	14.80	831.2
4/21/26 23:45	22-Apr-26 00:45:00	4.16	4.09	11.57	3.38	5.96	14.79	832.9
4/21/26 23:46	22-Apr-26 00:46:00	4.06	4.08	11.53	3.81	6.53	14.79	829.7
4/21/26 23:47	22-Apr-26 00:47:00	4.07	4.08	11.56	4.10	6.97	14.79	830.6
4/21/26 23:48	22-Apr-26 00:48:00	4.08	4.08	11.58	4.09	6.97	14.79	830.6
End R7		4.13	4.07	11.61	4.11	6.84	14.81	830.08
4/21/26 23:49	22-Apr-26 00:49:00	4.09	4.08	11.60	4.07	6.98	14.79	828.9
4/21/26 23:50	22-Apr-26 00:50:00	4.10	4.08	11.63	4.06	6.98	14.79	831.3
4/21/26 23:51	22-Apr-26 00:51:00	4.11	4.08	11.65	4.04	6.98	14.79	830.6
4/21/26 23:52	22-Apr-26 00:52:00	4.12	4.08	11.67	4.03	6.99	14.79	828.3
4/21/26 23:53	22-Apr-26 00:53:00	4.13	4.08	11.70	4.01	6.99	14.79	831.7
4/21/26 23:54	22-Apr-26 00:54:00	4.14	4.07	11.72	4.00	7.00	14.79	828.4
4/21/26 23:55	22-Apr-26 00:55:00	4.15	4.07	11.74	3.98	7.00	14.79	828.5
4/21/26 23:56	22-Apr-26 00:56:00	4.15	4.07	11.77	3.97	6.88	14.79	832.7
4/21/26 23:57	22-Apr-26 00:57:00	4.15	4.07	11.79	3.82	6.35	14.79	829.8
4/21/26 23:58	22-Apr-26 00:58:00	4.23	4.08	11.74	3.90	6.47	14.79	830.9
4/21/26 23:59	22-Apr-26 00:59:00	4.13	4.09	11.64	3.77	6.39	14.79	830.4
R8								
4/22/26 0:00	22-Apr-26 01:00:00	4.05	4.09	11.55	3.90	6.66	14.79	829.3
4/22/26 0:01	22-Apr-26 01:01:00	4.06	4.10	11.49	4.24	7.38	14.79	831.7
4/22/26 0:02	22-Apr-26 01:02:00	4.08	4.11	11.48	4.22	7.33	14.79	829.6
4/22/26 0:03	22-Apr-26 01:03:00	4.08	4.12	11.47	4.20	7.28	14.79	829.9
4/22/26 0:04	22-Apr-26 01:04:00	4.08	4.13	11.46	4.17	7.23	14.79	830.9
4/22/26 0:05	22-Apr-26 01:05:00	4.08	4.14	11.45	4.15	7.18	14.79	828.9
4/22/26 0:06	22-Apr-26 01:06:00	4.08	4.15	11.44	4.13	7.13	14.79	830.9
4/22/26 0:07	22-Apr-26 01:07:00	4.08	4.16	11.43	4.11	7.08	14.79	830.5
4/22/26 0:08	22-Apr-26 01:08:00	4.08	4.16	11.41	4.09	7.03	14.79	828.5
4/22/26 0:09	22-Apr-26 01:09:00	4.08	4.17	11.40	4.07	6.98	14.79	830.0
4/22/26 0:10	22-Apr-26 01:10:00	4.08	4.18	11.39	4.04	6.94	14.79	830.9
4/22/26 0:11	22-Apr-26 01:11:00	4.09	4.19	11.38	4.02	6.89	14.79	828.2
4/22/26 0:12	22-Apr-26 01:12:00	4.14	4.20	11.37	4.19	7.11	14.79	831.0
4/22/26 0:13	22-Apr-26 01:13:00	4.15	4.15	11.46	4.12	6.92	14.79	828.4
4/22/26 0:14	22-Apr-26 01:14:00	4.12	3.93	11.26	3.87	6.67	14.79	828.9
4/22/26 0:15	22-Apr-26 01:15:00	4.18	3.93	11.27	3.72	6.42	14.79	830.7
4/22/26 0:16	22-Apr-26 01:16:00	4.18	3.93	11.30	4.24	7.17	14.79	829.7
4/22/26 0:17	22-Apr-26 01:17:00	4.18	3.93	11.33	4.81	8.15	14.80	830.6
4/22/26 0:18	22-Apr-26 01:18:00	4.18	3.93	11.36	4.80	8.14	14.80	829.6
4/22/26 0:19	22-Apr-26 01:19:00	4.18	3.93	11.39	4.79	8.12	14.80	828.3
4/22/26 0:20	22-Apr-26 01:20:00	4.18	3.94	11.42	4.77	8.10	14.81	828.7
4/22/26 0:21	22-Apr-26 01:21:00	4.18	3.94	11.45	4.76	8.08	14.81	829.5
4/22/26 0:22	22-Apr-26 01:22:00	4.18	3.94	11.48	4.75	8.07	14.82	830.2
4/22/26 0:23	22-Apr-26 01:23:00	4.18	3.94	11.51	4.74	8.05	14.82	830.4
4/22/26 0:24	22-Apr-26 01:24:00	4.18	3.94	11.54	4.73	8.03	14.83	830.6
4/22/26 0:25	22-Apr-26 01:25:00	4.18	3.94	11.57	4.71	8.01	14.83	830.2
4/22/26 0:26	22-Apr-26 01:26:00	4.18	3.94	11.60	4.70	8.00	14.84	831.3
4/22/26 0:27	22-Apr-26 01:27:00	4.08	3.94	11.63	4.34	7.39	14.84	828.8
4/22/26 0:28	22-Apr-26 01:28:00	4.10	3.95	11.66	4.83	8.24	14.85	829.3
4/22/26 0:29	22-Apr-26 01:29:00	4.09	3.96	11.36	4.57	7.84	14.85	829.8
End R8		4.12	4.04	11.44	4.36	7.45	14.81	829.84
4/22/26 0:30	22-Apr-26 01:30:00	4.14	4.07	11.76	4.62	8.00	14.85	830.0
4/22/26 0:31	22-Apr-26 01:31:00	4.20	4.19	11.81	4.25	6.61	14.85	830.5
4/22/26 0:32	22-Apr-26 01:32:00	4.25	4.22	11.81	4.24	6.58	14.85	829.9
4/22/26 0:33	22-Apr-26 01:33:00	4.25	4.22	11.80	4.23	6.63	14.85	829.1
4/22/26 0:34	22-Apr-26 01:34:00	4.25	4.22	11.79	4.22	6.69	14.85	830.6
4/22/26 0:35	22-Apr-26 01:35:00	4.26	4.22	11.78	4.21	6.74	14.85	828.6
4/22/26 0:36	22-Apr-26 01:36:00	4.26	4.23	11.77	4.20	6.80	14.84	830.7
4/22/26 0:37	22-Apr-26 01:37:00	4.26	4.23	11.76	4.19	6.85	14.84	829.3
4/22/26 0:38	22-Apr-26 01:38:00	4.26	4.23	11.75	4.19	6.90	14.84	828.6
4/22/26 0:39	22-Apr-26 01:39:00	4.27	4.23	11.74	4.18	6.96	14.84	830.4
R9								
4/22/26 0:40	22-Apr-26 01:40:00	4.27	4.24	11.73	4.17	7.01	14.83	828.2
4/22/26 0:41	22-Apr-26 01:41:00	4.23	4.22	11.72	4.18	7.23	14.83	829.5
4/22/26 0:42	22-Apr-26 01:42:00	4.00	4.03	11.46	4.94	8.42	14.83	830.8

4/22/26 0:43	22-Apr-26 01:43:00	4.09	3.97	11.19	4.58	7.93	14.83	828.8
4/22/26 0:44	22-Apr-26 01:44:00	4.12	4.05	11.31	4.48	7.71	14.83	829.7
4/22/26 0:45	22-Apr-26 01:45:00	4.09	4.04	11.46	4.48	7.77	14.82	831.1
4/22/26 0:46	22-Apr-26 01:46:00	4.02	4.03	11.42	5.31	9.10	14.83	827.5
4/22/26 0:47	22-Apr-26 01:47:00	3.96	4.03	11.19	4.82	8.67	14.83	830.0
4/22/26 0:48	22-Apr-26 01:48:00	3.97	4.02	11.18	4.82	8.61	14.83	831.2
4/22/26 0:49	22-Apr-26 01:49:00	3.97	4.02	11.18	4.82	8.56	14.83	827.8
4/22/26 0:50	22-Apr-26 01:50:00	3.98	4.01	11.17	4.82	8.50	14.83	831.4
4/22/26 0:51	22-Apr-26 01:51:00	3.98	4.00	11.17	4.82	8.45	14.83	829.2
4/22/26 0:52	22-Apr-26 01:52:00	3.99	4.00	11.16	4.82	8.39	14.84	830.4
4/22/26 0:53	22-Apr-26 01:53:00	3.99	3.99	11.16	4.82	8.34	14.84	830.6
4/22/26 0:54	22-Apr-26 01:54:00	4.00	3.98	11.15	4.82	8.28	14.84	828.1
4/22/26 0:55	22-Apr-26 01:55:00	4.00	3.98	11.15	4.82	8.23	14.84	832.4
4/22/26 0:56	22-Apr-26 01:56:00	4.07	4.03	11.27	4.82	8.16	14.84	831.1
4/22/26 0:57	22-Apr-26 01:57:00	4.31	4.23	11.86	5.04	8.47	14.84	828.3
4/22/26 0:58	22-Apr-26 01:58:00	4.18	4.06	11.60	5.58	9.46	14.85	829.6
4/22/26 0:59	22-Apr-26 01:59:00	4.15	4.13	11.59	4.73	7.93	14.87	829.9
4/22/26 1:00	22-Apr-26 02:00:00	4.07	4.14	11.50	4.76	7.83	14.82	829.1
4/22/26 1:01	22-Apr-26 02:01:00	4.08	4.09	11.44	5.22	8.78	14.81	831.1
4/22/26 1:02	22-Apr-26 02:02:00	4.10	4.08	11.43	5.87	9.97	14.81	827.9
4/22/26 1:03	22-Apr-26 02:03:00	4.10	4.08	11.41	5.87	9.97	14.81	829.6
4/22/26 1:04	22-Apr-26 02:04:00	4.10	4.07	11.40	5.87	9.98	14.81	830.8
4/22/26 1:05	22-Apr-26 02:05:00	4.09	4.07	11.38	5.87	9.99	14.81	829.2
4/22/26 1:06	22-Apr-26 02:06:00	4.09	4.07	11.37	5.87	10.00	14.81	830.6
4/22/26 1:07	22-Apr-26 02:07:00	4.08	4.06	11.36	5.87	10.01	14.81	828.9
4/22/26 1:08	22-Apr-26 02:08:00	4.08	4.06	11.34	5.87	10.02	14.81	829.1
4/22/26 1:09	22-Apr-26 02:09:00	4.07	4.05	11.33	5.87	10.02	14.81	833.0
End R9		4.07	4.06	11.37	5.09	8.73	14.83	829.83
4/22/26 1:10	22-Apr-26 02:10:00	4.07	4.05	11.32	5.87	10.03	14.81	828.6
4/22/26 1:11	22-Apr-26 02:11:00	4.06	4.04	11.30	5.77	9.91	14.81	831.8
4/22/26 1:12	22-Apr-26 02:12:00	4.06	4.04	11.29	4.78	8.34	14.81	831.7
4/22/26 1:13	22-Apr-26 02:13:00	4.06	4.03	11.27	5.02	8.51	14.81	829.3
4/22/26 1:14	22-Apr-26 02:14:00	4.17	4.17	11.67	5.09	8.61	14.81	831.3
4/22/26 1:15	22-Apr-26 02:15:00	4.14	4.10	11.47	5.08	8.92	14.81	831.0
4/22/26 1:16	22-Apr-26 02:16:00	4.11	4.00	11.54	5.01	8.37	14.81	827.8
4/22/26 1:17	22-Apr-26 02:17:00	4.23	4.01	11.54	5.30	8.98	14.81	831.5
4/22/26 1:18	22-Apr-26 02:18:00	4.23	4.02	11.53	5.30	8.98	14.82	830.0
4/22/26 1:19	22-Apr-26 02:19:00	4.23	4.02	11.53	5.30	8.97	14.82	828.8
4/22/26 1:20	22-Apr-26 02:20:00	4.23	4.03	11.52	5.30	8.97	14.82	831.2
4/22/26 1:21	22-Apr-26 02:21:00	4.23	4.04	11.52	5.30	8.97	14.82	828.4
4/22/26 1:22	22-Apr-26 02:22:00	4.24	4.05	11.51	5.30	8.96	14.82	830.0
4/22/26 1:23	22-Apr-26 02:23:00	4.24	4.05	11.51	5.30	8.96	14.82	830.3
4/22/26 1:24	22-Apr-26 02:24:00	4.24	4.06	11.50	5.30	8.96	14.82	829.0
4/22/26 1:25	22-Apr-26 02:25:00	4.24	4.07	11.50	5.30	8.95	14.82	830.5
4/22/26 1:26	22-Apr-26 02:26:00	4.24	4.07	11.49	5.20	8.81	14.82	829.4
4/22/26 1:27	22-Apr-26 02:27:00	4.23	4.08	11.49	4.59	7.80	14.82	827.5
4/22/26 1:28	22-Apr-26 02:28:00	4.11	4.09	11.48	4.61	7.95	14.82	831.6
4/22/26 1:29	22-Apr-26 02:29:00	4.15	4.09	11.48	4.24	7.19	14.82	829.7
4/22/26 1:30	22-Apr-26 02:30:00	4.21	4.10	11.47	4.32	7.30	14.82	829.9
4/22/26 1:31	22-Apr-26 02:31:00	4.23	4.11	11.84	4.47	7.76	14.82	829.8
4/22/26 1:32	22-Apr-26 02:32:00	4.28	4.12	11.99	4.64	7.78	14.82	828.5
4/22/26 1:33	22-Apr-26 02:33:00	4.28	4.12	11.92	4.64	7.80	14.82	830.5
4/22/26 1:34	22-Apr-26 02:34:00	4.27	4.13	11.86	4.64	7.81	14.82	830.1
4/22/26 1:35	22-Apr-26 02:35:00	4.26	4.14	11.79	4.64	7.83	14.82	828.9
4/22/26 1:36	22-Apr-26 02:36:00	4.26	4.14	11.73	4.64	7.85	14.82	831.9
4/22/26 1:37	22-Apr-26 02:37:00	4.25	4.15	11.66	4.64	7.87	14.82	830.8
4/22/26 1:38	22-Apr-26 02:38:00	4.25	4.16	11.60	4.64	7.88	14.82	829.2
R10								
4/22/26 1:39	22-Apr-26 02:39:00	4.24	4.16	11.53	4.64	7.90	14.82	831.5
4/22/26 1:40	22-Apr-26 02:40:00	4.23	4.17	11.47	4.64	7.92	14.82	829.0
4/22/26 1:41	22-Apr-26 02:41:00	4.21	4.17	11.40	4.66	8.07	14.82	830.7
4/22/26 1:42	22-Apr-26 02:42:00	4.13	4.15	11.34	4.63	7.78	14.82	829.9
4/22/26 1:43	22-Apr-26 02:43:00	4.16	4.11	11.27	4.51	7.68	14.82	828.7
4/22/26 1:44	22-Apr-26 02:44:00	4.06	4.08	11.25	4.37	7.49	14.82	831.9
4/22/26 1:45	22-Apr-26 02:45:00	4.15	4.05	11.29	4.45	7.49	14.82	831.2
4/22/26 1:46	22-Apr-26 02:46:00	4.15	4.06	11.32	4.22	7.14	14.82	828.2
4/22/26 1:47	22-Apr-26 02:47:00	4.15	4.07	11.35	4.43	7.49	14.82	831.1
4/22/26 1:48	22-Apr-26 02:48:00	4.15	4.08	11.38	4.41	7.45	14.82	830.5
4/22/26 1:49	22-Apr-26 02:49:00	4.14	4.10	11.41	4.39	7.42	14.82	828.7
4/22/26 1:50	22-Apr-26 02:50:00	4.14	4.11	11.44	4.37	7.38	14.82	831.6
4/22/26 1:51	22-Apr-26 02:51:00	4.14	4.13	11.47	4.35	7.35	14.82	828.8
4/22/26 1:52	22-Apr-26 02:52:00	4.14	4.14	11.50	4.33	7.31	14.82	829.9
4/22/26 1:53	22-Apr-26 02:53:00	4.14	4.15	11.54	4.31	7.27	14.82	830.2
4/22/26 1:54	22-Apr-26 02:54:00	4.13	4.17	11.57	4.29	7.24	14.82	829.1
4/22/26 1:55	22-Apr-26 02:55:00	4.13	4.18	11.60	4.27	7.20	14.82	831.5

4/22/26 1:56	22-Apr-26 02:56:00	4.13	4.19	11.63	4.36	7.37	14.82	831.3
4/22/26 1:57	22-Apr-26 02:57:00	4.15	4.21	11.71	4.69	7.99	14.82	829.5
4/22/26 1:58	22-Apr-26 02:58:00	4.12	4.22	11.79	4.68	7.99	14.82	833.3
4/22/26 1:59	22-Apr-26 02:59:00	4.24	4.23	11.87	4.15	6.89	14.82	828.9
4/22/26 2:00	22-Apr-26 03:00:00	4.13	4.17	11.51	4.55	7.50	14.82	830.3
4/22/26 2:01	22-Apr-26 03:01:00	4.11	4.06	11.49	4.13	6.98	14.82	832.2
4/22/26 2:02	22-Apr-26 03:02:00	4.17	4.05	11.64	3.91	6.67	14.82	829.7
4/22/26 2:03	22-Apr-26 03:03:00	4.16	4.05	11.65	3.91	6.67	14.82	830.2
4/22/26 2:04	22-Apr-26 03:04:00	4.15	4.04	11.67	3.91	6.67	14.82	830.0
4/22/26 2:05	22-Apr-26 03:05:00	4.15	4.04	11.69	3.91	6.66	14.82	828.1
4/22/26 2:06	22-Apr-26 03:06:00	4.14	4.04	11.71	3.91	6.66	14.82	829.8
4/22/26 2:07	22-Apr-26 03:07:00	4.13	4.03	11.73	3.91	6.66	14.82	828.3
4/22/26 2:08	22-Apr-26 03:08:00	4.13	4.03	11.75	3.91	6.66	14.82	829.4
End R10		4.15	4.11	11.53	4.31	7.30	14.82	830.12
4/22/26 2:09	22-Apr-26 03:09:00	4.12	4.02	11.76	3.91	6.65	14.82	832.5
4/22/26 2:10	22-Apr-26 03:10:00	4.12	4.02	11.78	3.91	6.65	14.82	829.2
4/22/26 2:11	22-Apr-26 03:11:00	4.11	4.02	11.80	4.01	6.83	14.82	831.7
4/22/26 2:12	22-Apr-26 03:12:00	4.17	4.01	11.82	4.19	7.09	14.82	830.5
4/22/26 2:13	22-Apr-26 03:13:00	4.12	4.01	11.69	4.92	8.41	14.82	827.7
4/22/26 2:14	22-Apr-26 03:14:00	4.07	4.00	11.42	5.01	8.56	14.82	829.8



Appendix C

Laboratory Analysis Data

Laboratory Analysis Report

PGT Project No. 260234

Case Narrative

General Information

Company: Midway Sunset Cogeneration Company

Project #: Montrose Project No. Proj-066225

Analysis Date(s): April 22-24, 2026

Analyst: LV

<u>Analytical Protocols</u>	<u>Analyses</u>	<u>Analytes</u>
EPA method 18	GC/FID	VOC's
ASTM D1945 [*]	GC/TCD	Fuel Composition
ASTM D3588	Lab Practice	Fuel Heat Content
ASTM 3246	Microcoulometry	Fuel Total Sulfur

*ASTM D1945 is ancillary to ASTM D3588

Sample Receiving: All samples were received intact: All samples were labeled (handwritten) and ID numbers matched those on the chain of custody (printed).

Analytical Notes: No problems were encountered during the receiving, handling, and analysis of any samples.

VOC Sample Set Observations

All samples were colorless and no condensate was visible on the bag inner surface. All bags were at least 80% filled.

Fuel Sample Observations

Sulfur sample (in tedlar bag) was colorless and no condensate was visible on the bag inner surface. All bags were at least 80% filled.

QA/QC Review: All of the data have been reviewed for quality assurance. All of the quality control and sample specific information in this package is complete and meets the minimum requirements for acceptability.

If you have any questions or concerns regarding these analyses, please feel free to contact us at any time.

4830 Burr Street Suite D Bakersfield CA 93308 · Phone 661.324.1317 · Fax 661.324.3310



Laboratory Certification Statements

I certify that to the best of my knowledge:

- Test data and all corresponding information have been checked for accuracy and completeness.
- Analyses have been conducted in accordance with the terms and conditions specified in the contract
- All deviations, method modifications, or analytical anomalies are summarized in the appropriate report narrative(s).
- Analysis results only represent that of the sample as received into the laboratory.
- This document contains a total of 12 pages.

This test report shall not be reproduced except in full, without the written approval of the laboratory.

Lou Villaruz

Lou Villaruz 5/8/2025
Analyst Date

Paul Sabovich

Approved

Paul Sabovich 5/8/2025
QA Supervisor Date

4830 Burr Street Suite D Bakersfield CA 93308 · Phone 661.324.1317 · Fax 661.324.3310





Appendix C.1

VOC Analyses



pgtech@earthlink.net

4830 'D' Burr St.
Bakersfield, CA 93308
661-324-1317
661-324-2746

Attention: Jim Polhamus
Montrose Air Quality Services
19479 Creek Road
Bakersfield, CA 93314

Sampled: 4/21/2026
Submitted: 4/23/2026
Analyzed: 4/23/2026
Reported: 5/08/2026

EPA 18 - Volatile Organic Compounds

Name:	Midway Sunset Cogen Co.	Lab No.:	260234
Location:	HRSG Out	Client Proj No.	proj-026225
Source:	Unit A		

Client ID:	1-VOC-A	2-VOC-A	3-VOC-A
PGT Lab ID:	260234-1	260234-2	260234-3

C1	Methane	5.32	4.06	6.09
	NMHC1	ND	ND	ND
C2	Ethane	ND	ND	ND
	NMHC2	ND	ND	ND
C3	Propane	ND	ND	ND
	NMHC3	ND	ND	ND
C4	n-Butane	ND	ND	ND
	NMHC4	ND	ND	ND
C5	n-Pentane	ND	ND	ND
	NMHC5	ND	ND	ND
C6	n-Hexane	ND	ND	ND
	C6+	ND	ND	ND

ND< 0.5 ppmv as Methane

Results Depicted as ppmv

QA Supervisor

Approved

Analyst


CHAIN OF CUSTODY

Bakersfield Location

19479 Creek Road,
Bakersfield, CA 93314
(661) 437-4164

Lab info:

PGT
4830 BURR STREET, SUITE D
BAKERSFIELD, CA 93308

Client / Project: MIDWAY SUNSET COGEN		Project / Sample Location: UNIT A		Test / Analytical Method: EPA-18 / ASTM D1945 / D3588 / 3246				
Project No.: PROJ-066225		Purchase Order No:		Special Analysis / Reporting Instructions:				
Send Analytical Report To: jpolhamus@montrose-env.com		Sampler or PM Signature: SERENO FIGUEROA 						
Run / Sample No.	Date	Time	Containers	Sample Fraction	Reagent	Lab / Sample ID No.		
1-VOC-A	4/21/26		1	TEDLAR BAG ↓				
2-VOC-A	4/21/26		1					
3-VOC-A	4/21/26		1					
1-VOC-FG	4/21/26		1					
Total Containers			4					
Relinquished by Jorge Ochoa		Date 4-22-26	Time 0903	Received by 		Date 4.22.26	Time 0903	Temp.
Relinquished by		Date	Time	Received by		Date	Time	Temp.
Relinquished by		Date	Time	Received by		Date	Time	Temp.



Appendix C.2

Fuel Gas Analyses



4830 Burr Street 'D'
Bakersfield, CA 93308
(661) 324-1317
(661) 324-3310

pgtech@pacificgastech.com

Montrose AQS
19479 Creek Road
Bakersfield, CA 93314
Attention: Jim Polhamus

Sampled: 4/21/2026
Submitted: 4/22/2026
Analyzed: 4/22/2026
Reported: 5/8/2026

Gas Analysis by Chromatography - ASTM D 1945/D 3588

Description:	Unit A Fuel	Lab No.:	260234-4
Location:	Midway Sunset Cogen	Pressure, psi:	-
Client ID:	NG-Outlet -A	Temperature, °F:	-

Component	Mole %	Weight %	G/MCF
Oxygen	0.23	0.43	
Nitrogen	0.91	1.49	
Carbon Dioxide	0.86	2.23	
Hydrogen	ND	0.00	
Carbon Monoxide	ND	0.00	
Hydrogen Sulfide	ND	0.00	
Methane	93.91	88.43	
Ethane	3.86	6.81	
Propane	0.24	0.61	0.065
iso-Butane	ND	0.00	0.000
n-Butane	ND	0.00	0.000
iso-Pentane	ND	0.00	0.000
n-Pentane	ND	0.00	0.000
Hexanes Plus	ND	0.00	0.000
Totals	100.00	100.00	0.065

Specific Volume, ft ³ /lb	22.27	Values Corrected for Compressibility	CHONS	Weight %
Compressibility (Z) Factor	0.9978			
Specific Gravity, Calculated	0.5882	0.5893	Carbon	72.757
			Hydrogen	23.706
			Oxygen	2.048
			Nitrogen	1.488
			Sulfur	0.000
GROSS	LHV	HHV		
BTU/ft ³ Dry	1022.7	1024.9		
BTU/ft ³ Wet	1004.8	1007.0		
BTU/lb Dry	22780.5	22829.8		
BTU/lb Wet	22381.8	22430.3		
NET			F FACTOR @	8624
BTU/ft ³ Dry	921.9	923.9	68 deg F, dscf/MMBTU	
BTU/ft ³ Wet	905.8	907.8		
BTU/lb Dry	20535.8	20580.2	F FACTOR @	8494
BTU/lb Wet	20176.4	20220.1	60 deg F, dscf/MMBTU	
Hydrogen Sulfide, ppm		Not Tested	Method	GC/FPD
Total Sulfur as H ₂ S, gr/100 scf		0.030	Method	ASTM D3246
Dew Point, deg F		Not Tested	Method	Bureau of Mines
Molecular Weight		17.04		

ND : None Detected

Tr : Trace

QA Supervisor *Jim Polhamus* Approved
Analyst *Lou Villanueva*



Appendix D

Quality Assurance/Quality Control



Appendix D.1

Units and Abbreviations

UNITS AND ABBREVIATIONS

@ X% O ₂	corrected to X% oxygen (corrected for dilution air)
CC	absolute value of the confidence coefficient
d	absolute value of the mean differences
°C	degrees Celsius (centigrade)
°F	degrees Fahrenheit
°R	degrees Rankine
" H ₂ O	inches of water column
13.6	specific gravity of mercury
ΔH	pressure drop across orifice meter, inches H ₂ O
ΔP	velocity head of stack gas, inches H ₂ O
θ	total sampling time, minutes
μg	microgram
ρ _a	density of acetone, mg/ml
ρ _w	density of water, 0.9982 g/ml or 0.002201 lb/ml
acfm	actual cubic feet of gas per minute at stack conditions
A _n	cross-sectional area of nozzle, ft ²
A _s	cross-sectional area of stack, square feet (ft ²)
Btu	British thermal unit
B _{ws}	proportion by volume of water vapor in gas stream
C _a	particulate matter concentration in stack gas, gr/acf
C _{Avg}	average unadjusted gas concentration, ppmv
C _{Dir}	measured concentration of calibration gas, ppmv
cf or ft ³	cubic feet
cfm	cubic feet per minute
C _{Gas}	average gas concentration adjusted for bias, ppmv
C _M	average of initial and final system bias check responses from upscale calibration gas, ppmv
cm or m ³	cubic meters
C _{MA}	actual concentration of the upscale calibration gas, ppmv
C _O	average of initial and final system bias check responses from low-level calibration gas, ppmv
C _p	pitot tube coefficient
C _s	particulate matter concentration in stack gas, gr/dscf
CS	calibration span, % or ppmv
C _S	measured concentration of calibration gas, ppmv
C _V	manufactured certified concentration of calibration gas, ppmv
D	drift assessment, % of span
dcf	dry cubic feet
dcm	dry cubic meters
D _n	diameter of nozzle, inches
D _s	diameter of stack, inches
dscf	dry standard cubic feet
dscfm	dry standard cubic feet per minute
dscm	dry standard cubic meters
F _d	F-factor, dscf/MMBtu of heat input
fpm	feet per minute
fps	feet per second
ft	feet
ft ²	square feet
g	gram
gal	gallons
gr	grains (7000 grains per pound)

UNITS AND ABBREVIATIONS

gr/dscf	grains per dry standard cubic feet
hr	hour
I	percent of isokinetic sampling
in	inch
k	kilo or thousand (metric units, multiply by 10^3)
K	kelvin (temperature)
K_3	conversion factor 0.0154 gr/mg
K_4	conversion factor 0.002669 ((in. Hg)(ft ³))/((ml)(°R))
kg	kilogram
K_p	pitot tube constant (85.49 ft/sec)
kwscfh	thousand wet standard cubic feet per hour
l	liters
lb/hr	pounds per hour
lb/MMBtu	pounds per million Btu
lpm	liters per minute
m	meter or milli
M	thousand (English units) or mega (million, metric units)
m ³	cubic meters
m_a	mass of residue of acetone after evaporation, mg
M_d	molecular weight of stack gas; dry basis, lb/lb-mole
meq	milliequivalent
mg	milligram
Mg	megagram (10^6 grams)
min	minute
ml or mL	milliliter
mm	millimeter
MM	million (English units)
MMBtu/hr	million Btu per hour
m_n	total amount of particulate matter collected, mg
mol	mole
mol. wt. or MW	molecular weight
M_s	molecular weight of stack gas; wet basis, lb/lb-mole
MW	molecular weight or megawatt
n	number of data points
ng	nanogram
nm	nanometer
P_{bar}	barometric pressure, inches Hg
pg	picogram
P_g	stack static pressure, inches H ₂ O
P_m	barometric pressure of dry gas meter, inches Hg
ppb	parts per billion
ppbv	parts per billion, by volume
ppbvd	parts per billion by volume, dry basis
ppm	parts per million
ppmv	parts per million, by volume
ppmvd	parts per million by volume, dry basis
P_s	absolute stack gas pressure, inches Hg
psi	pounds per square inch
psia	pounds per square inch absolute
psig	pounds per square inch gauge
P_{std}	standard absolute pressure, 29.92 inches Hg
Q_a	volumetric flow rate, actual conditions, acfm

UNITS AND ABBREVIATIONS

Q_s	volumetric flow rate, standard conditions, scfm
Q_{std}	volumetric flow rate, dry standard conditions, dscfm
R	ideal gas constant 21.85 ((in. Hg) (ft ³))/((°R) (lbmole))
SB_{final}	post-run system bias check, % of span
SB_i	pre-run system bias check, % of span
scf	standard cubic feet
scfh	standard cubic feet per hour
scfm	standard cubic feet per minute
scm	standard cubic meters
scmh	standard cubic meters per hour
sec	second
sf, sq. ft., or ft ²	square feet
std	standard
t	metric ton (1000 kg)
$T_{0.975}$	t-value
T_a	absolute average ambient temperature, °R (+460 for English)
T_m	absolute average dry gas meter temperature, °R (+460 for English)
ton or t	ton = 2000 pounds
tph or tons/hr	tons per hour
tpy or tons/yr	tons per year
T_s	absolute average stack gas meter temperature, °R (+460 for English)
T_{std}	absolute temperature at standard conditions
V	volt
V_a	volume of acetone blank, ml
V_{aw}	volume of acetone used in wash, ml
V_{lc}	total volume H ₂ O collected in impingers and silica gel, grams
V_m	volume of gas sampled through dry gas meter, ft ³
$V_{m(std)}$	volume of gas measured by the dry gas meter, corrected to standard conditions, dscf
V_{ma}	stack gas volume sampled, acf
V_n	volume collected at stack conditions through nozzle, acf
V_s	average stack gas velocity, feet per second
$V_{wc(std)}$	volume of water vapor condensed, corrected to standard conditions, scf
$V_{wi(std)}$	volume of water vapor in gas sampled from impingers, scf
$V_{wsg(std)}$	volume of water vapor in gas sampled from silica gel, scf
W	watt
W_a	weight of residue in acetone wash, mg
W_{imp}	total weight of impingers, grams
W_{sg}	total weight of silica gel, grams
Y	dry gas meter calibration factor, dimensionless

ACRONYMS

AAS	atomic absorption spectroscopy
ACDP	air contaminant discharge permit
ACE	analyzer calibration error, percent of span
AD	absolute difference
ADL	above detection limit
AETB	Air Emissions Testing Body
AS	applicable standard (emission limit)
ASTM	American Society For Testing And Materials
BACT	best achievable control technology
BDL	below detection limit
BHP	brake horsepower
BIF	boiler and industrial furnace
BLS	black liquor solids
CC	confidence coefficient
CD	calibration drift
CE	calibration error
CEM	continuous emissions monitor
CEMS	continuous emissions monitoring system
CERMS	continuous emissions rate monitoring system
CET	calibration error test
CFR	Code of Federal Regulations
CGA	cylinder gas audit
CHNOS	elemental analysis for determination of C, H, N, O, and S content in fuels
CNCG	concentrated non-condensable gas
CO	catalytic oxidizer
COC	chain of custody
COMS	continuous opacity monitoring system
CPM	condensible particulate matter
CPMS	continuous parameter monitoring system
CT	combustion turbine
CTM	conditional test method
CTO	catalytic thermal oxidizer
CVAAS	cold vapor atomic absorption spectroscopy
D _e	equivalent diameter
DE	destruction efficiency
Dioxins	polychlorinated dibenzo-p-dioxins (pcdd's)
DLL	detection level limited
DNCG	dilute non-condensable gas
ECD	electron capture detector
EIT	Engineer In Training
ELCD	electroconductivity detector (hall detector)
EMPC	estimated maximum possible concentration
EPA	US Environmental Protection Agency
EPRI	Electric Power Research Institute
ES	emission standard (applicable limit)
ESP	electrostatic precipitator
EU	emission unit
FCCU	fluid catalytic cracking unit
FGD	flue gas desulfurization
FI	flame ionization
FIA	flame ionization analyzer
FID	flame ionization detector
FPD	flame photometric detector
FPM	filterable particulate matter

ACRONYMS

FTIR	Fourier-transform infrared spectroscopy
FTPb	field train proof blank
FTRB	field train recovery blank
Furans	polychlorinated dibenzofurans (pcdf's)
GC	gas chromatography
GC/MS	gas chromatography/mass spectroscopy
GFAAS	graphite furnace atomic absorption spectroscopy
GFC	gas filter correlation
GHG	greenhouse gas
HAP	hazardous air pollutant
HC	hydrocarbons
HHV	higher heating value
HPLC	high performance liquid chromatography
HRGC/HRMS	high-resolution gas chromatography/high-resolution mass spectroscopy
HRSG	heat recovery steam generator
IC	ion chromatography
ICAP	inductively-coupled argon plasmography
ICPCR	ion chromatography with a post-column reactor
IR	infrared radiation
ISO	International Standards Organization
kW	kilowatts
LFG	landfill gas
LHV	lower heating value
LPG	liquified petroleum gas
MACT	maximum achievable control technology
MDI	methylene diphenyl diisocyanate
MDL	method detection limit
MNOC	maximum normal operating conditions
MRL	method reporting limit
MS	mass spectrometry
NA	not applicable or not available
NCASI	National Council For Air And Steam Improvement
NCG	non-condensable gases
NDIR	non-dispersive infrared
NESHAP	National Emissions Standards For Hazardous Air Pollutants
NG	natural gas
NIOSH	National Institute For Occupational Safety And Health
NIST	National Institute Of Standards And Technology
NMC	non-methane cutter
NMOC	non-methane organic compounds
NMVOC	non-methane volatile organic compounds
NPD	nitrogen phosphorus detector
NSPS	New Source Performance Standards
OSHA	Occupational Safety And Health Administration
PAH	polycyclic aromatic hydrocarbons
PCB	polychlorinated biphenyl compounds
PCWP	plywood and composite wood products
PE	Professional Engineer
PFAS	per- and polyfluoroalkyl substances (PFAS)
PI	photoionization
PID	photoionization detector
PM	particulate matter
PM ₁₀	particulate matter less than 10 microns in aerodynamic diameter
PM _{2.5}	particulate matter less than 2.5 microns in aerodynamic diameter

ACRONYMS

POM	polycyclic organic matter
PS	performance specification
PSD	particle size distribution
PSEL	plant site emission limits
PST	performance specification test
PTE	permanent total enclosure
PTM	performance test method
QA/QC	quality assurance and quality control
QI	Qualified Individual
QSTI	Qualified Source Testing Individual
RA	relative accuracy
RAA	relative accuracy audit
RACT	reasonably available control technology
RATA	relative accuracy test audit
RCTO	rotary concentrator thermal oxidizer
RICE	stationary reciprocating internal combustion engine
RM	reference method
RTO	regenerative thermal oxidizer
SAM	sulfuric acid mist
SCD	sulfur chemiluminescent detector
SCR	selective catalytic reduction system
SD	standard deviation
Semi-VOST	semivolatile organic compounds sample train
SRM	standard reference material
TAP	toxic air pollutant
TBD	to be determined
TCA	thermal conductivity analyzer
TCD	thermal conductivity detector
TGNENMOC	total gaseous non-ethane non-methane organic compounds
TGNMOC	total gaseous non-methane organic compounds
TGOC	total gaseous organic compounds
THC	total hydrocarbons
TIC	tentatively identified compound
TO	thermal oxidizer
TO	toxic organic (as in EPA Method TO-15)
TPM	total particulate matter
TSP	total suspended particulate matter
TTE	temporary total enclosure
ULSD	ultra-low sulfur diesel
UV	ultraviolet radiation range
VE	visible emissions
VOC	volatile organic compounds
VOST	volatile organic sample train
WC	water column
WWTP	waste water treatment plant

CHEMICAL NOMENCLATURE

Ag	silver	SO ₂	sulfur dioxide
As	arsenic	SO ₃	sulfur trioxide
Ba	barium	SO _x	sulfur oxides
Be	beryllium	TCDD	tetrachlorodibenzodioxin
C	carbon	TCDF	tetrachlorodibenzofuran
Cd	cadmium	TGOC	total gaseous organic concentration
CdS	cadmium sulfide	THC	total hydrocarbons
CH ₂ O	formaldehyde	Tl	thallium
CH ₃ CHO	acetaldehyde	TRS	total reduced sulfur compounds
CH ₃ OH	methanol	Zn	zinc
CH ₄	methane		
C ₂ H ₄ O	ethylene oxide		
C ₂ H ₆	ethane		
C ₃ H ₄ O	acrolein		
C ₃ H ₆ O	propionaldehyde		
C ₃ H ₈	propane		
C ₆ H ₅ OH	phenol		
Cl ₂	chlorine		
ClO ₂	chlorine dioxide		
CO	carbon monoxide		
Co	cobalt		
CO ₂	carbon dioxide		
Cr	chromium		
Cu	copper		
EtO	ethylene oxide		
EtOH	ethyl alcohol (ethanol)		
H ₂	hydrogen		
H ₂ O	water		
H ₂ O ₂	hydrogen peroxide		
H ₂ S	hydrogen sulfide		
H ₂ SO ₄	sulfuric acid		
HCl	hydrogen chloride		
Hg	mercury		
IPA	isopropyl alcohol		
MDI	methylene diphenyl diisocyanate		
MEK	methyl ethyl ketone		
MeOH	methanol		
Mn	manganese		
N ₂	nitrogen		
NH ₃	ammonia		
Ni	nickel		
NO	nitric oxide		
NO ₂	nitrogen dioxide		
NO _x	nitrogen oxides		
O ₂	oxygen		
P	phosphorus		
Pb	lead		
PCDD	polychlorinated dibenzo-p-dioxins		
PCDF	polychlorinated dibenzofurans		
Sb	antimony		
Se	selenium		



Appendix D.2

Calibration Gas Certs

CERTIFICATE OF ANALYSIS

Grade of Product: CEM-CAL ZERO

Part Number: NI CZ15A	Reference Number: 48-403347908-1
Cylinder Number: CC163485	Cylinder Volume: 142.0 CF
Laboratory: 124 - Los Angeles - CA	Cylinder Pressure: 2000 PSIG
Analysis Date: May 21, 2025	Valve Outlet: 580
Lot Number: 48-403347908-1	

Expiration Date: May 21, 2033

ANALYTICAL RESULTS

Component	Requested Purity	Certified Concentration
NITROGEN	99.9995 %	99.9995 %
NOX	0.1 PPM	<LDL 0.017 PPM
THC	0.1 PPM	<LDL 0.006 PPM
CARBON MONOXIDE	0.5 PPM	<LDL 0.011 PPM
CARBON DIOXIDE	1.0 PPM	0.075 PPM

Permanent Notes: Airgas certifies that the contents of this cylinder meet the requirements of 40 CFR 72.2

Impurities verified against analytical standards traceable to NIST by weight and/or analysis.



Signature on file

Approved for Release

CERTIFICATE OF ANALYSIS

Grade of Product: EPA PROTOCOL STANDARD

Part Number:	E03NI84E15A0027	Reference Number:	153-403363725-1
Cylinder Number:	CC288623	Cylinder Volume:	148.0 CF
Laboratory:	124 - Tooele (SAP) - UT	Cylinder Pressure:	2015 PSIG
PGVP Number:	B72025	Valve Outlet:	590
Gas Code:	CO2,O2,BALN	Certification Date:	Jun 16, 2025

Expiration Date: Jun 16, 2033

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted. The results relate only to the items tested. The report shall not be reproduced except in full without approval of the laboratory. Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS					
Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
CARBON DIOXIDE	5.000 %	5.018 %	G1	+/- 1.4% NIST Traceable	06/16/2025
OXYGEN	11.00 %	10.93 %	G1	+/- 0.7% NIST Traceable	06/16/2025
NITROGEN	Balance				

CALIBRATION STANDARDS					
Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
NTRM	13060411	CC413537	7.489 % CARBON DIOXIDE/NITROGEN	0.6%	Apr 03, 2031
NTRM	11060606	CC338377	14.93 % OXYGEN/NITROGEN	0.2%	Nov 02, 2028

ANALYTICAL EQUIPMENT		
Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
Horiba VIA-510 SV4MEUTJ CO2	CO2 NDIR (Dixon)	May 29, 2025
Horiba MPA-510 W603MM58 O2	O2 Paramagnetic (DIXON)	May 29, 2025

Triad Data Available Upon Request



Signature on file

Approved for Release

W002AS-066225-RT-8482

123 of 162

Page 1 of 1

CERTIFICATE OF ANALYSIS

Grade of Product: EPA PROTOCOL STANDARD

Part Number:	E03NI70E15A7420	Reference Number:	48-403470822-1
Cylinder Number:	CC317478	Cylinder Volume:	151.0 CF
Laboratory:	124 - Los Angeles - CA	Cylinder Pressure:	2015 PSIG
PGVP Number:	B32025	Valve Outlet:	590
Gas Code:	CO2,O2,BALN	Certification Date:	Oct 28, 2025

Expiration Date: Oct 28, 2033

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted. The results relate only to the items tested. The report shall not be reproduced except in full without approval of the laboratory. Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS					
Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
CARBON DIOXIDE	8.500 %	8.552 %	G1	+/- 0.6% NIST Traceable	10/28/2025
OXYGEN	21.00 %	21.04 %	G1	+/- 0.4% NIST Traceable	10/27/2025
NITROGEN	Balance				

CALIBRATION STANDARDS					
Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
NTRM	06010637	K004892	7.016 % CARBON DIOXIDE/NITROGEN	+/- 0.5%	Nov 19, 2027
NTRM	22060528	CC745036	23.124 % OXYGEN/NITROGEN	+/-0.2%	Mar 31, 2028

ANALYTICAL EQUIPMENT		
Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
SIEMENS 6E CO2	NDIR	Sep 30, 2025
SIEMENS OXYMAT 6	PARAMAGNETIC	Sep 29, 2025

Triad Data Available Upon Request



Signature on file

Approved for Release

W002AS-066225-RT-8482

124 of 162

Page 1 of 1

CERTIFICATE OF ANALYSIS

Grade of Product: EPA PROTOCOL STANDARD

Part Number:	E03NI99E15A1421	Reference Number:	48-403288290-1
Cylinder Number:	CC308437	Cylinder Volume:	140.0 CF
Laboratory:	124 - Los Angeles - CA	Cylinder Pressure:	2015 PSIG
PGVP Number:	B32025	Valve Outlet:	660
Gas Code:	CO,NO,NOX,BALN	Certification Date:	Mar 25, 2025

Expiration Date: Mar 25, 2028

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted. The results relate only to the items tested. The report shall not be reproduced except in full without approval of the laboratory. Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS

Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
NOX	5.000 PPM	5.019 PPM	G1	+/- 1.0% NIST Traceable	03/25/2025, 03/25/2025
CARBON MONOXIDE	5.000 PPM	4.999 PPM	G1	+/- 0.9% NIST Traceable	03/25/2025
NITRIC OXIDE	5.000 PPM	4.962 PPM	G1	+/- 1.0% NIST Traceable	03/25/2025, 03/25/2025
NITROGEN	Balance				

CALIBRATION STANDARDS

Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
NTRM	210604-09	ALM-048219	9.942 PPM CARBON MONOXIDE/NITROGEN	+/- 0.8%	Jul 23, 2027
PRM	C2300301.03B	APE1516632	5.01 PPM NOX/NITROGEN	+/- 0.8%	Feb 01, 2025
NTRM	080121A-27	KAL004293	5.08 PPM NITRIC OXIDE/NITROGEN	+/- 1.0%	Jun 01, 2027
GMIS	080121A-27	KAL004293-NOX	5.08 PPM NOX/NITROGEN	+/- 0.9%	Jun 01, 2027

The SRM, NTRM, PRM, or RGM noted above is only in reference to the GMIS used in the assay and not part of the analysis.

ANALYTICAL EQUIPMENT

Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
Thermo 48i-TLE 1132250557 CO	NDIR	Mar 10, 2025
Thermo 42-iLS 1115848421 NO	Chemiluminescence	Mar 10, 2025
Thermo 42-iLS 1115848421 NOx	Chemiluminescence	Mar 10, 2025

Triad Data Available Upon Request



Signature on file

Approved for Release

W002AS-066225-RT-8482

125 of 162

Page 1 of 1

CERTIFICATE OF ANALYSIS

Grade of Product: EPA PROTOCOL STANDARD

Part Number:	E03NI99E15A39A1	Reference Number:	48-403494222-1
Cylinder Number:	CC212465	Cylinder Volume:	144.0 CF
Laboratory:	124 - Los Angeles - CA	Cylinder Pressure:	2015 PSIG
PGVP Number:	B32025	Valve Outlet:	660
Gas Code:	CO,NO,NOX,BALN	Certification Date:	Dec 02, 2025

Expiration Date: Dec 02, 2028

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted. The results relate only to the items tested. The report shall not be reproduced except in full without approval of the laboratory. Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS

Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
NOX	9.500 PPM	9.367 PPM	G1	+/- 0.9% NIST Traceable	11/21/2025, 12/02/2025
CARBON MONOXIDE	9.500 PPM	9.937 PPM	G1	+/- 0.9% NIST Traceable	11/21/2025
NITRIC OXIDE	9.500 PPM	9.178 PPM	G1	+/- 0.7% NIST Traceable	11/21/2025, 12/02/2025
NITROGEN	Balance				

CALIBRATION STANDARDS

Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
NTRM	210604-09	ALM-048219	9.942 PPM CARBON MONOXIDE/NITROGEN	+/- 0.8%	Jul 23, 2027
PRM	C2300301.04B	APE1516613	10.00 PPM NITRIC OXIDE/NITROGEN	+/- 0.5%	Jun 11, 2028
GMIS	CK275-2A	KAL004391	10.14 PPM NITRIC OXIDE/NITROGEN	+/- 0.6%	Jan 10, 2027
PRM	C2300301.04B	APE1516613-NOX	10.01 PPM NOX/NITROGEN	+/- 0.5%	Jun 11, 2028
GMIS	CK275-2A	KAL004391-NOX	10.19 PPM NOX/NITROGEN	+/- 0.6%	Jan 10, 2027

The SRM, NTRM, PRM, or RGM noted above is only in reference to the GMIS used in the assay and not part of the analysis.

ANALYTICAL EQUIPMENT

Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
Thermo 48i-TLE 1132250557 CO	NDIR	Oct 24, 2025
Thermo 42-iLS 1115848421 NO	Chemiluminescence	Dec 01, 2025
Thermo 42-iLS 1115848421 NOx	Chemiluminescence	Dec 01, 2025

Triad Data Available Upon Request



Signature on file

Approved for Release

CERTIFICATE OF ANALYSIS

Grade of Product: EPA PROTOCOL STANDARD

Part Number:	E03NI99E15A0173	Reference Number:	48-403495247-1
Cylinder Number:	CC340026	Cylinder Volume:	144.0 CF
Laboratory:	124 - Los Angeles - CA	Cylinder Pressure:	2015 PSIG
PGVP Number:	B32025	Valve Outlet:	660
Gas Code:	CO,NO,NOX,BALN	Certification Date:	Dec 02, 2025

Expiration Date: Dec 02, 2028

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted. The results relate only to the items tested. The report shall not be reproduced except in full without approval of the laboratory. Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS

Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
NOX	19.00 PPM	19.18 PPM	G1	+/- 1.4% NIST Traceable	11/21/2025, 12/02/2025
CARBON MONOXIDE	19.00 PPM	18.85 PPM	G1	+/- 0.5% NIST Traceable	11/21/2025
NITRIC OXIDE	19.00 PPM	19.18 PPM	G1	+/- 0.7% NIST Traceable	11/21/2025, 12/02/2025
NITROGEN	Balance				

CALIBRATION STANDARDS

Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
NTRM	20060904	CC714645	26.54 PPM CARBON MONOXIDE/NITROGEN	+/-0.4%	Jun 28, 2027
PRM	12403	APEX1324265	20.00 PPM NITRIC OXIDE/NITROGEN	+/- 0.5%	Dec 22, 2023
GMIS	DDCK20230828	CC733096	20.27 PPM NITRIC OXIDE/NITROGEN	+/- 0.6%	Aug 28, 2026
PRM	12403	APEX1324265-NOX	20.02 PPM NOX/NITROGEN	+/- 0.5%	Dec 22, 2023
GMIS	DDCK20230828	CC733096-NOX	20.35 PPM NOX/NITROGEN	+/- 0.6%	Aug 28, 2026

The SRM, NTRM, PRM, or RGM noted above is only in reference to the GMIS used in the assay and not part of the analysis.

ANALYTICAL EQUIPMENT

Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
SIEMENS 6E N1R4310 CO	NDIR	Nov 24, 2025
Thermo 42-iLS 1115848421 NO	Chemiluminescence	Dec 01, 2025
Thermo 42-iLS 1115848421 NOx	Chemiluminescence	Dec 01, 2025

Triad Data Available Upon Request



Signature on file

Approved for Release

CERTIFICATE OF ANALYSIS

Grade of Product: EPA PROTOCOL STANDARD

Part Number:	E02AI99E15W0018	Reference Number:	48-402776524-1
Cylinder Number:	CC506970	Cylinder Volume:	146.0 CF
Laboratory:	124 - Los Angeles - CA	Cylinder Pressure:	2015 PSIG
PGVP Number:	B32023	Valve Outlet:	660
Gas Code:	NO2,BALA	Certification Date:	Jul 06, 2023

Expiration Date: Jul 06, 2026

Certification performed in accordance with "EPA Traceability Protocol for Assay and Certification of Gaseous Calibration Standards (May 2012)" document EPA 600/R-12/531, using the assay procedures listed. Analytical Methodology does not require correction for analytical interference. This cylinder has a total analytical uncertainty as stated below with a confidence level of 95%. There are no significant impurities which affect the use of this calibration mixture. All concentrations are on a mole/mole basis unless otherwise noted. The results relate only to the items tested. The report shall not be reproduced except in full without approval of the laboratory. Do Not Use This Cylinder below 100 psig, i.e. 0.7 megapascals.

ANALYTICAL RESULTS

Component	Requested Concentration	Actual Concentration	Protocol Method	Total Relative Uncertainty	Assay Dates
NITROGEN DIOXIDE AIR	18.00 PPM Balance	18.01 PPM	G1	+/- 2.0% NIST Traceable	06/29/2023, 07/06/2023

CALIBRATION STANDARDS

Type	Lot ID	Cylinder No	Concentration	Uncertainty	Expiration Date
GMIS	1534012021301	ND73004	15.05 PPM NITROGEN DIOXIDE/NITROGEN	+/- 1.6%	Jun 15, 2025
PRM	12409	D913660	15.01 PPM NITROGEN DIOXIDE/AIR	+/- 1.5%	Feb 17, 2023

The SRM, NTRM, PRM, or RGM noted above is only in reference to the GMIS used in the assay and not part of the analysis.

ANALYTICAL EQUIPMENT

Instrument/Make/Model	Analytical Principle	Last Multipoint Calibration
MKS FTIR NO2 018335821	FTIR	Jun 29, 2023

Triad Data Available Upon Request



Signature on file

Approved for Release

W002AS-066225-RT-8482

128 of 162


Page 1 of 1




Appendix D.3

Strip Charts


MoleDAQ Graph

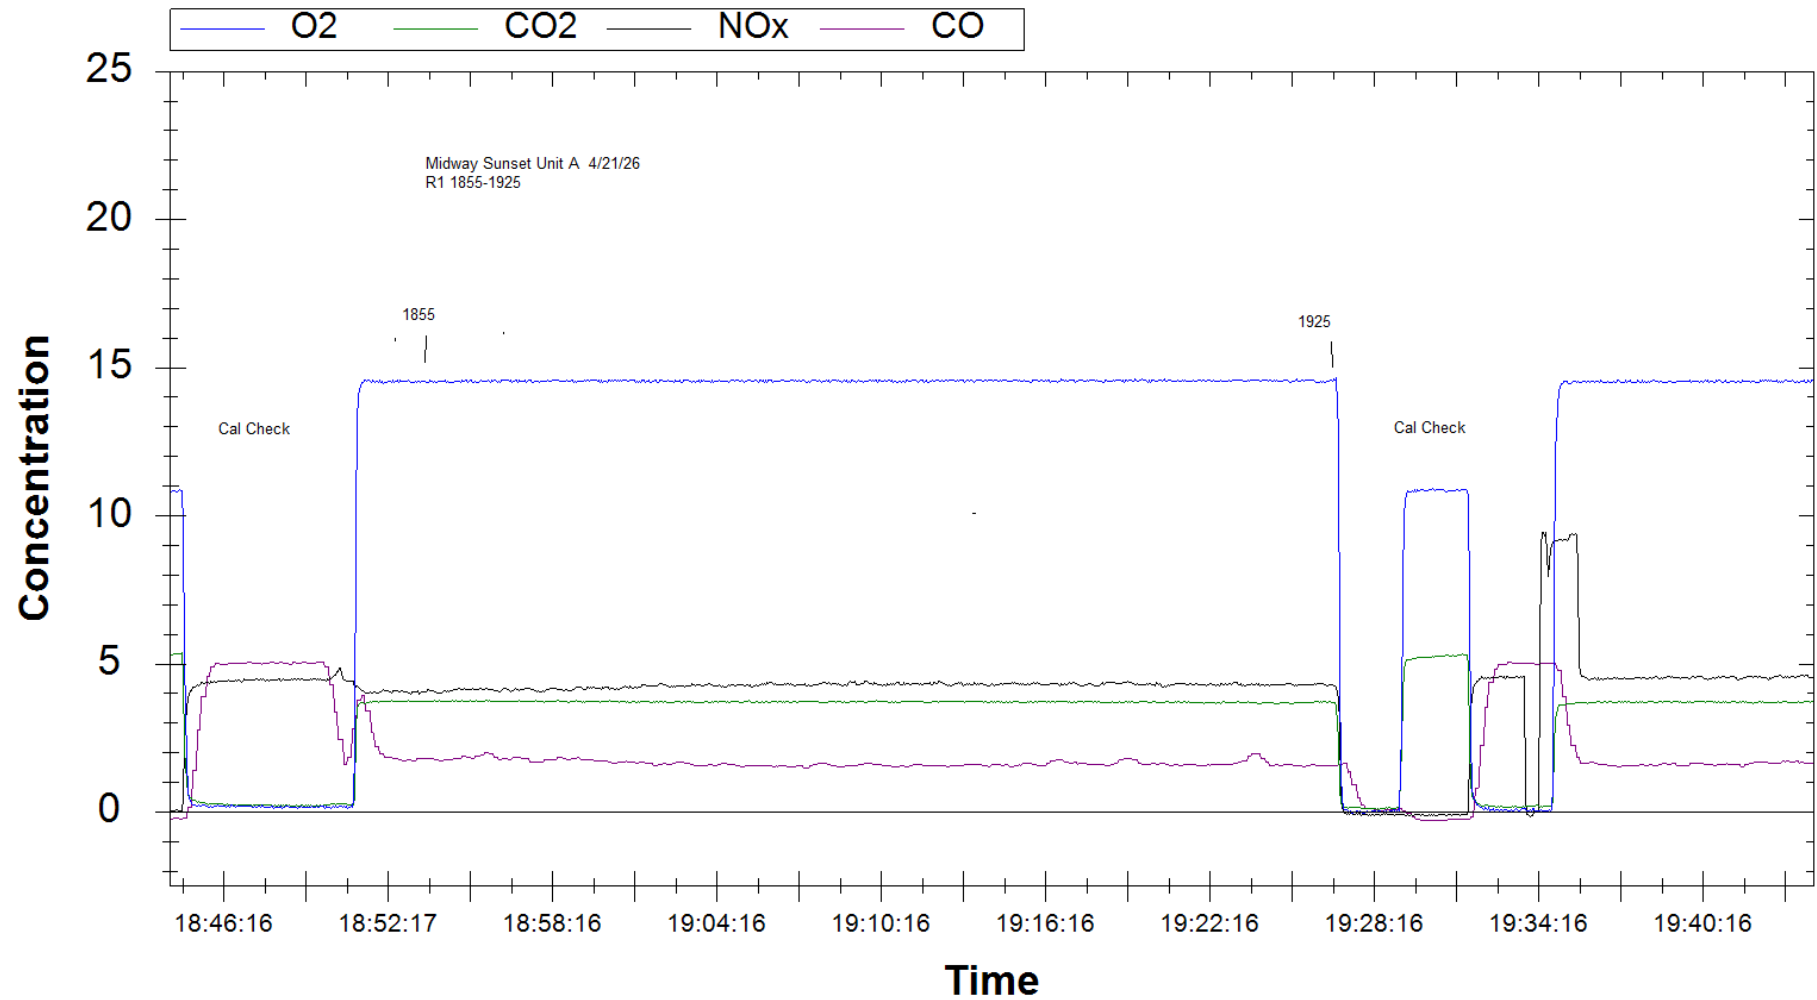


MoleDAQ Graph

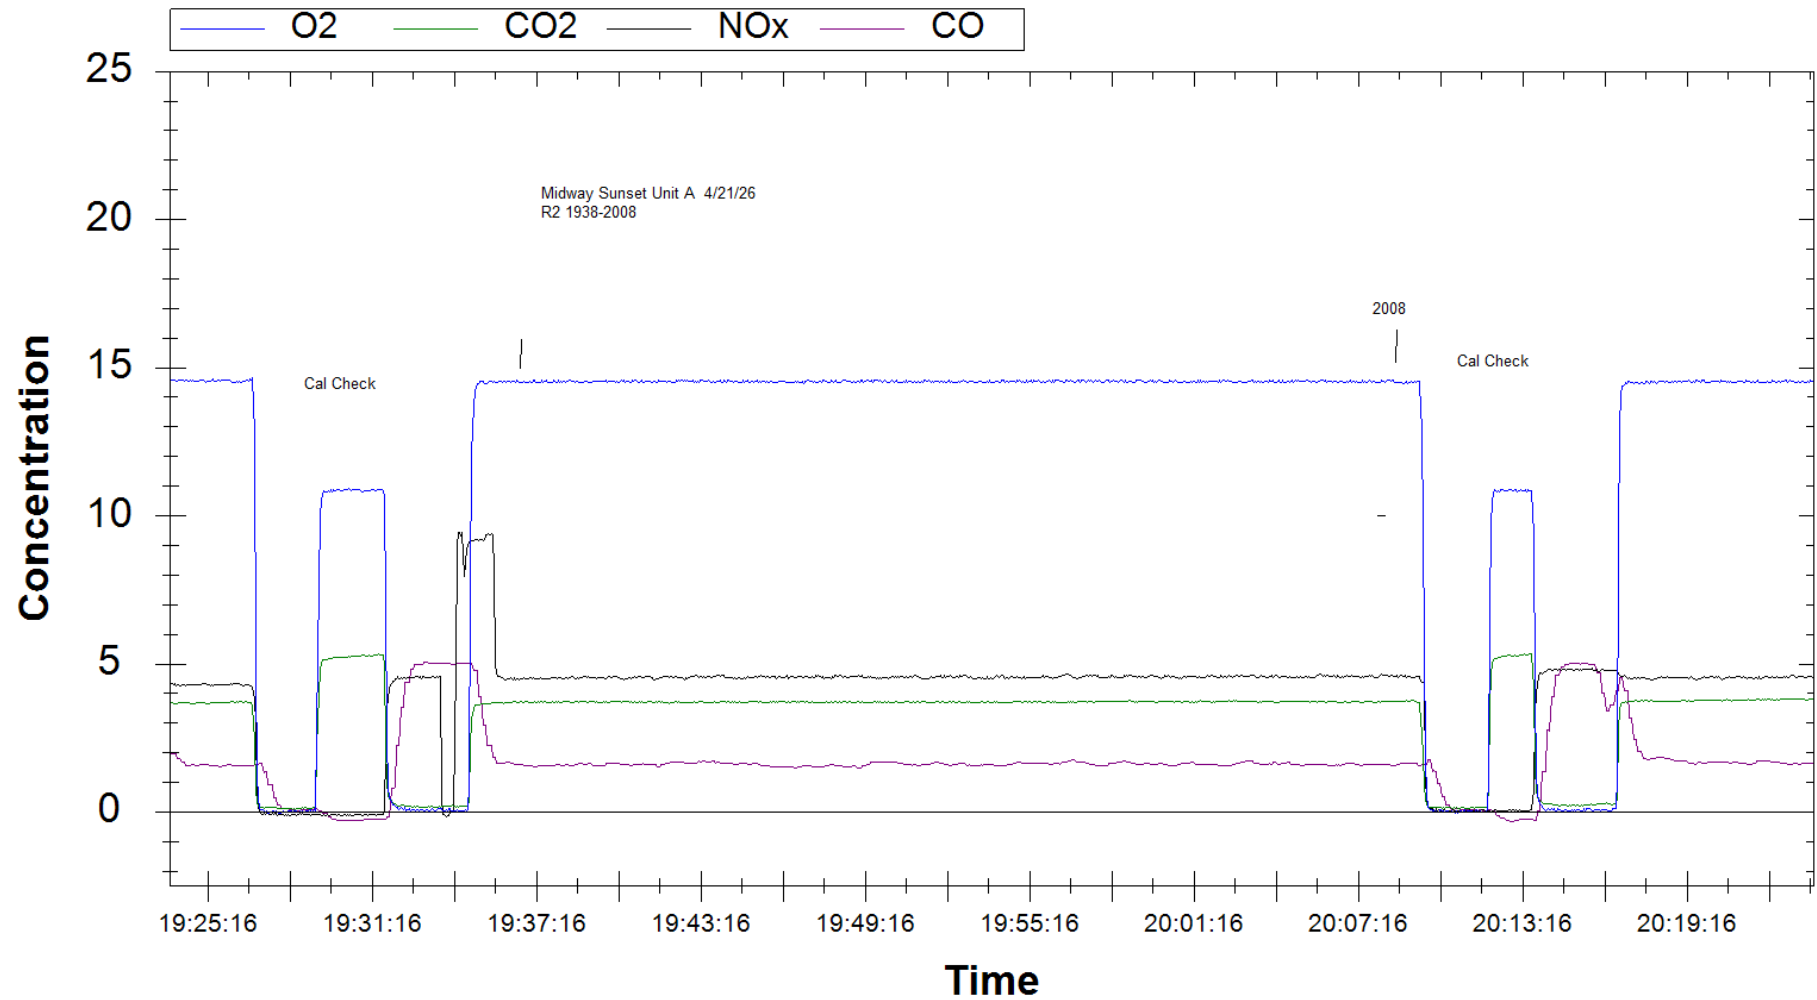


MoleDAQ Graph

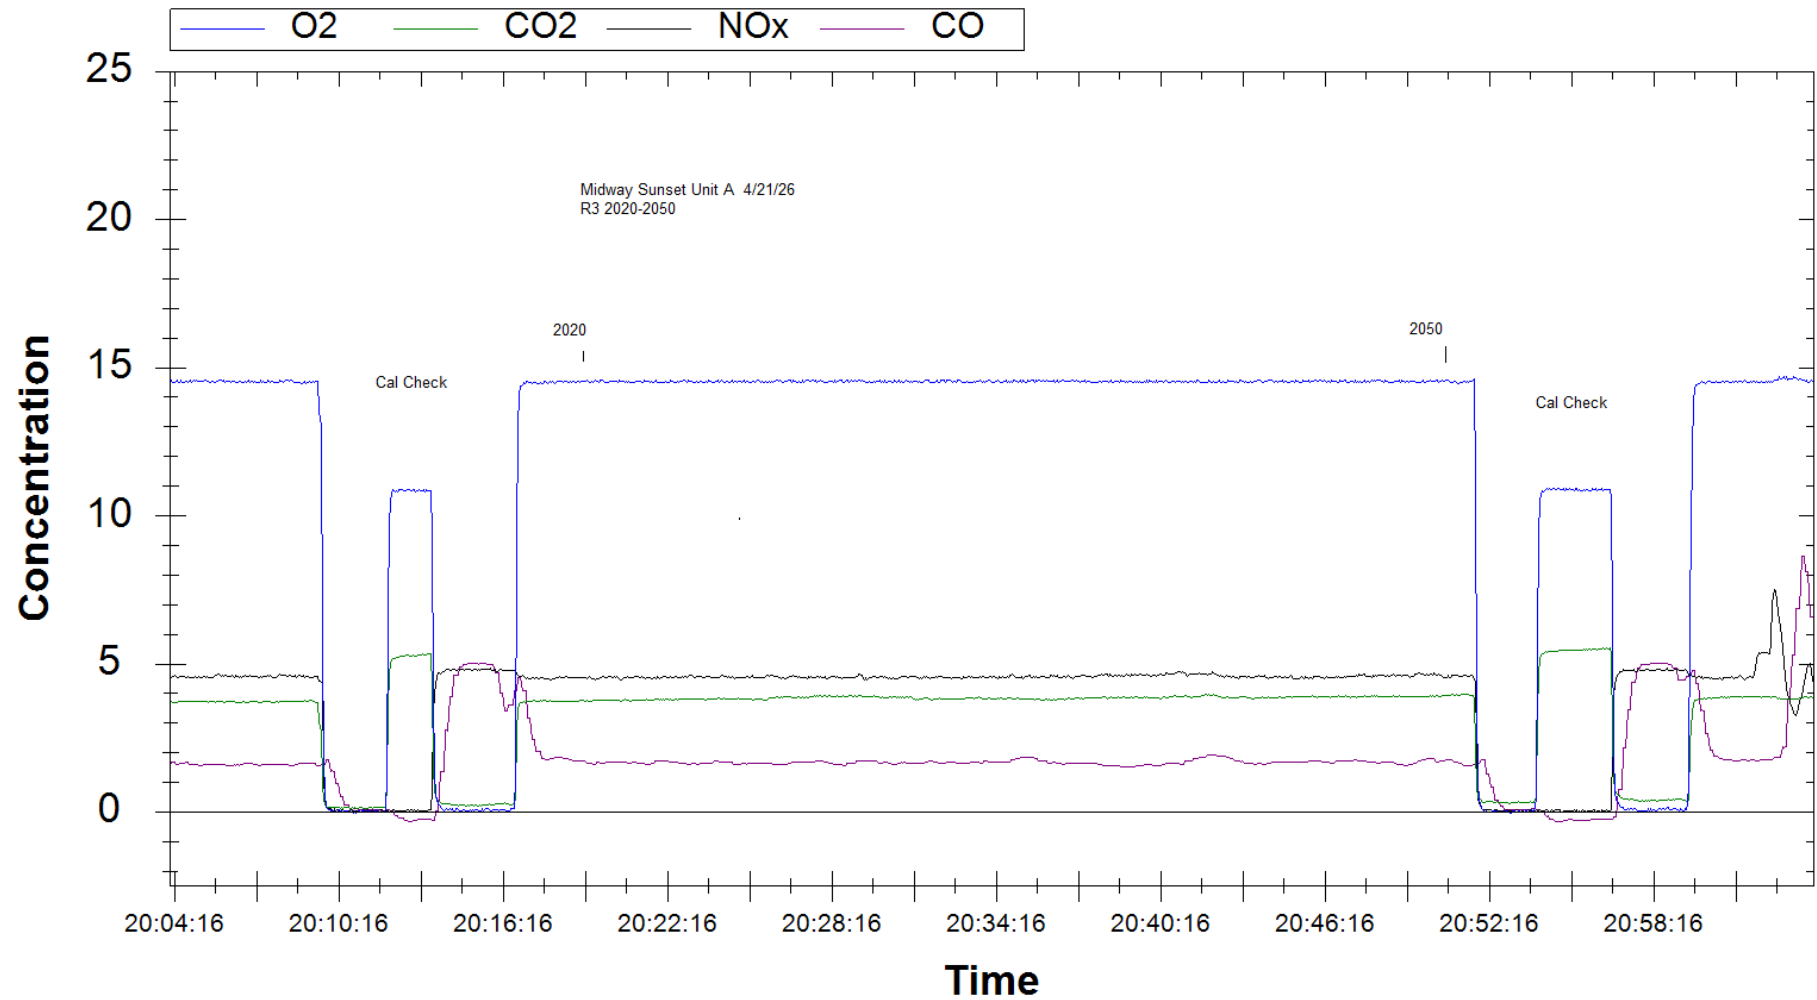


MoleDAQ Graph

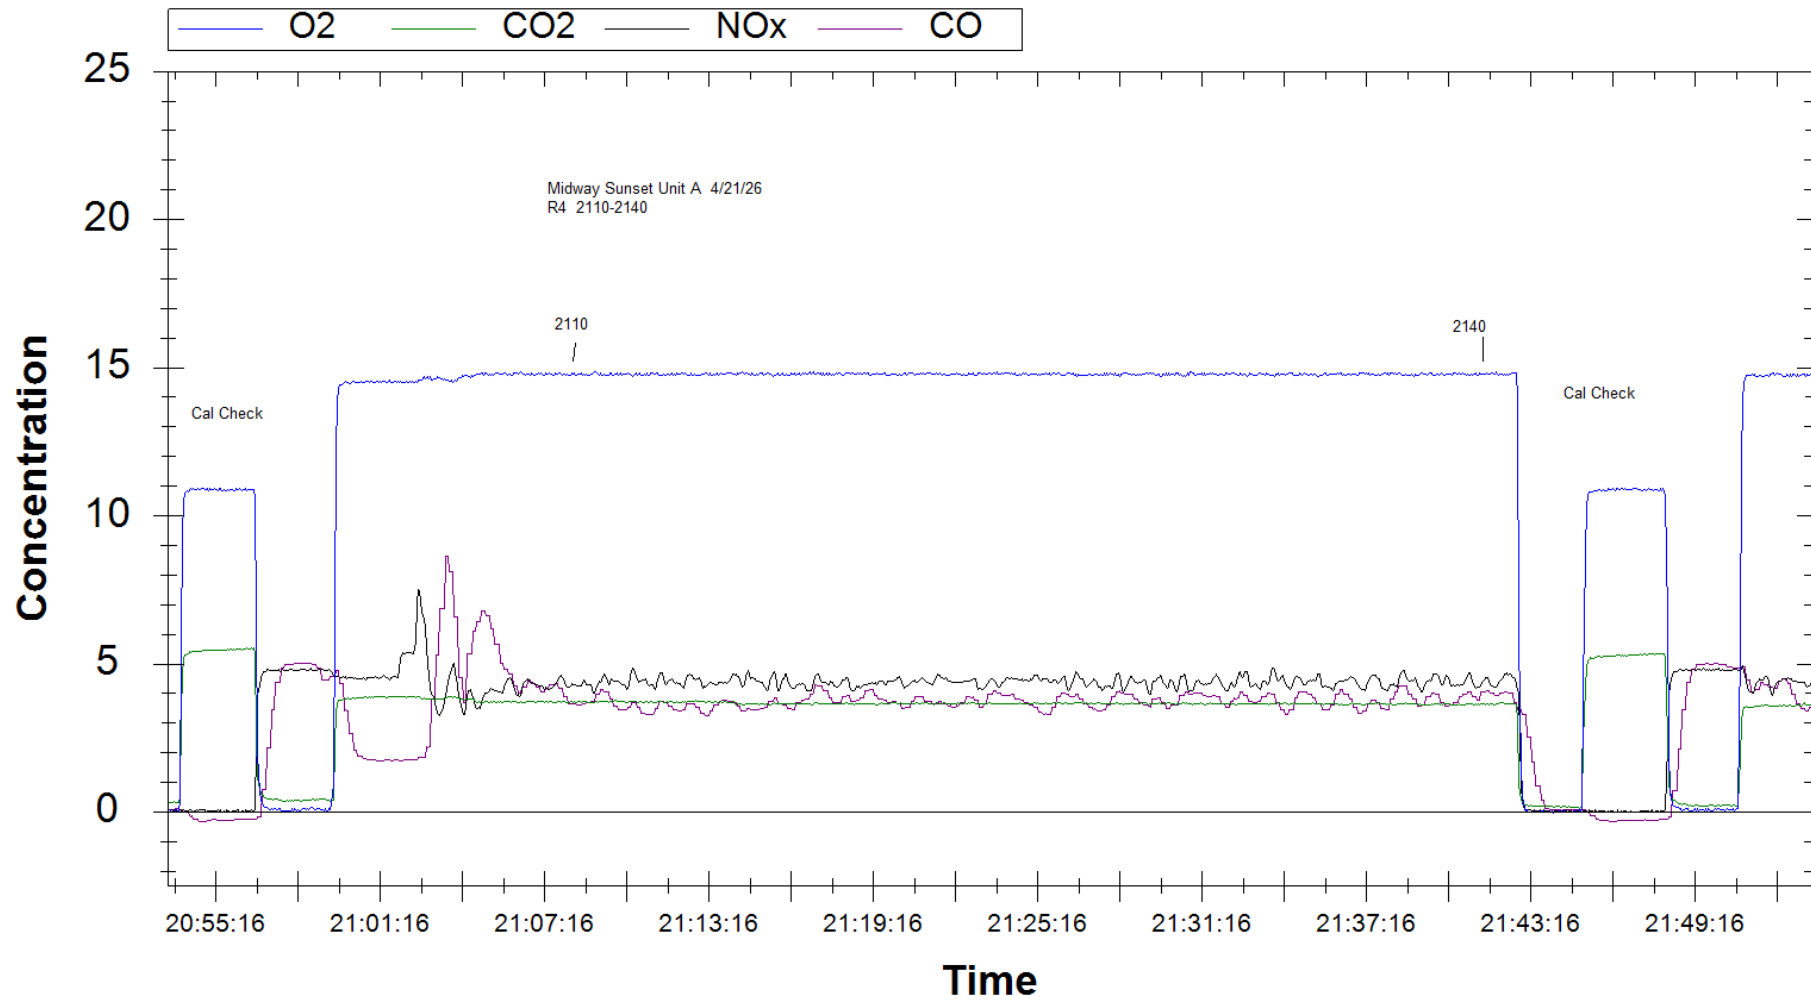


MoleDAQ Graph

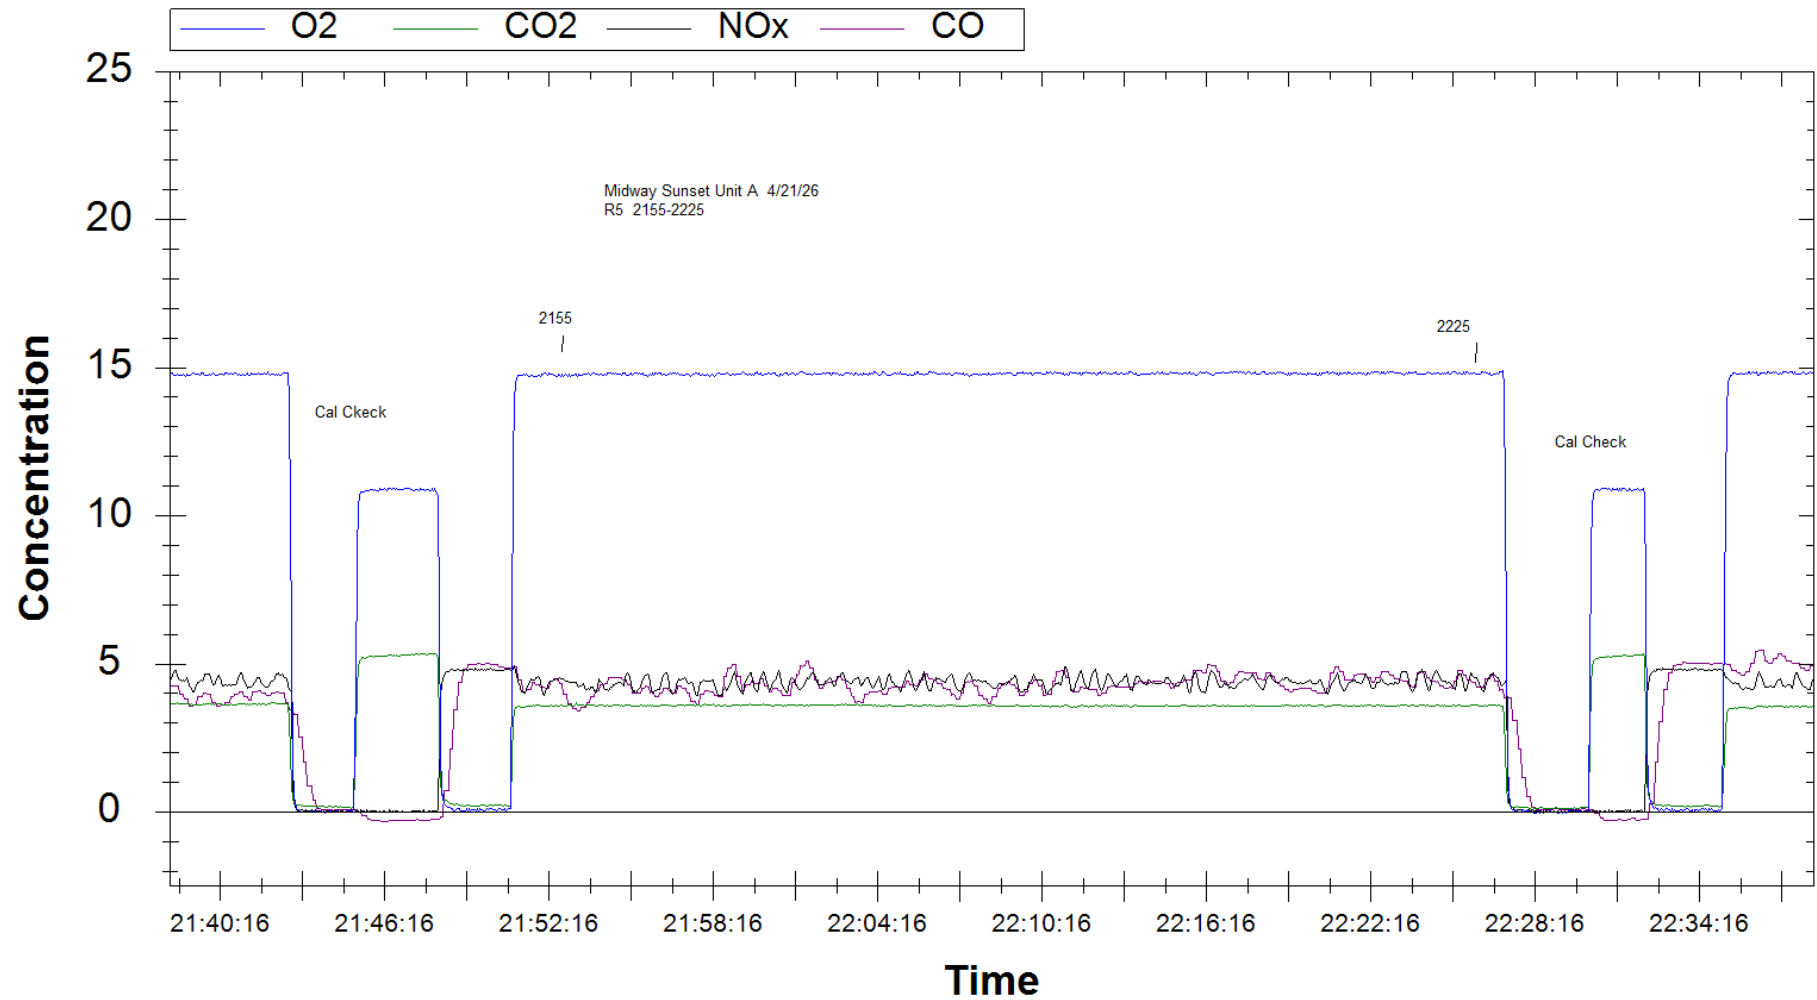


MoleDAQ Graph

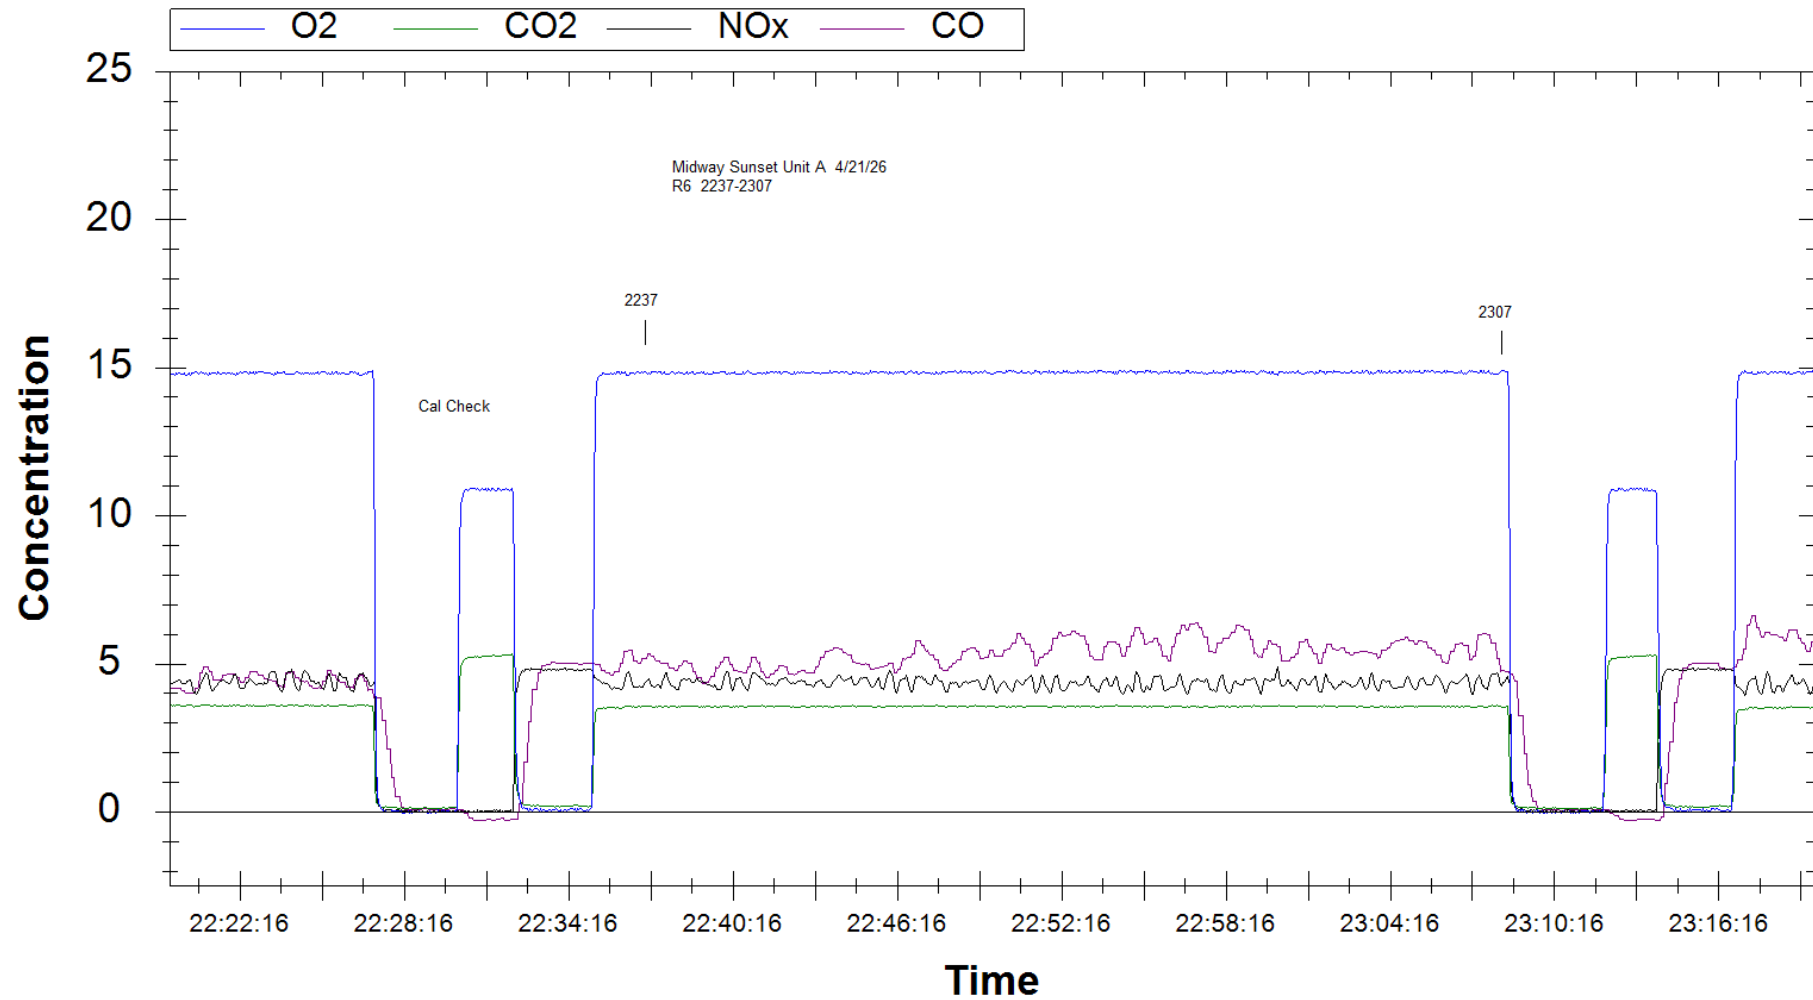


MoleDAQ Graph

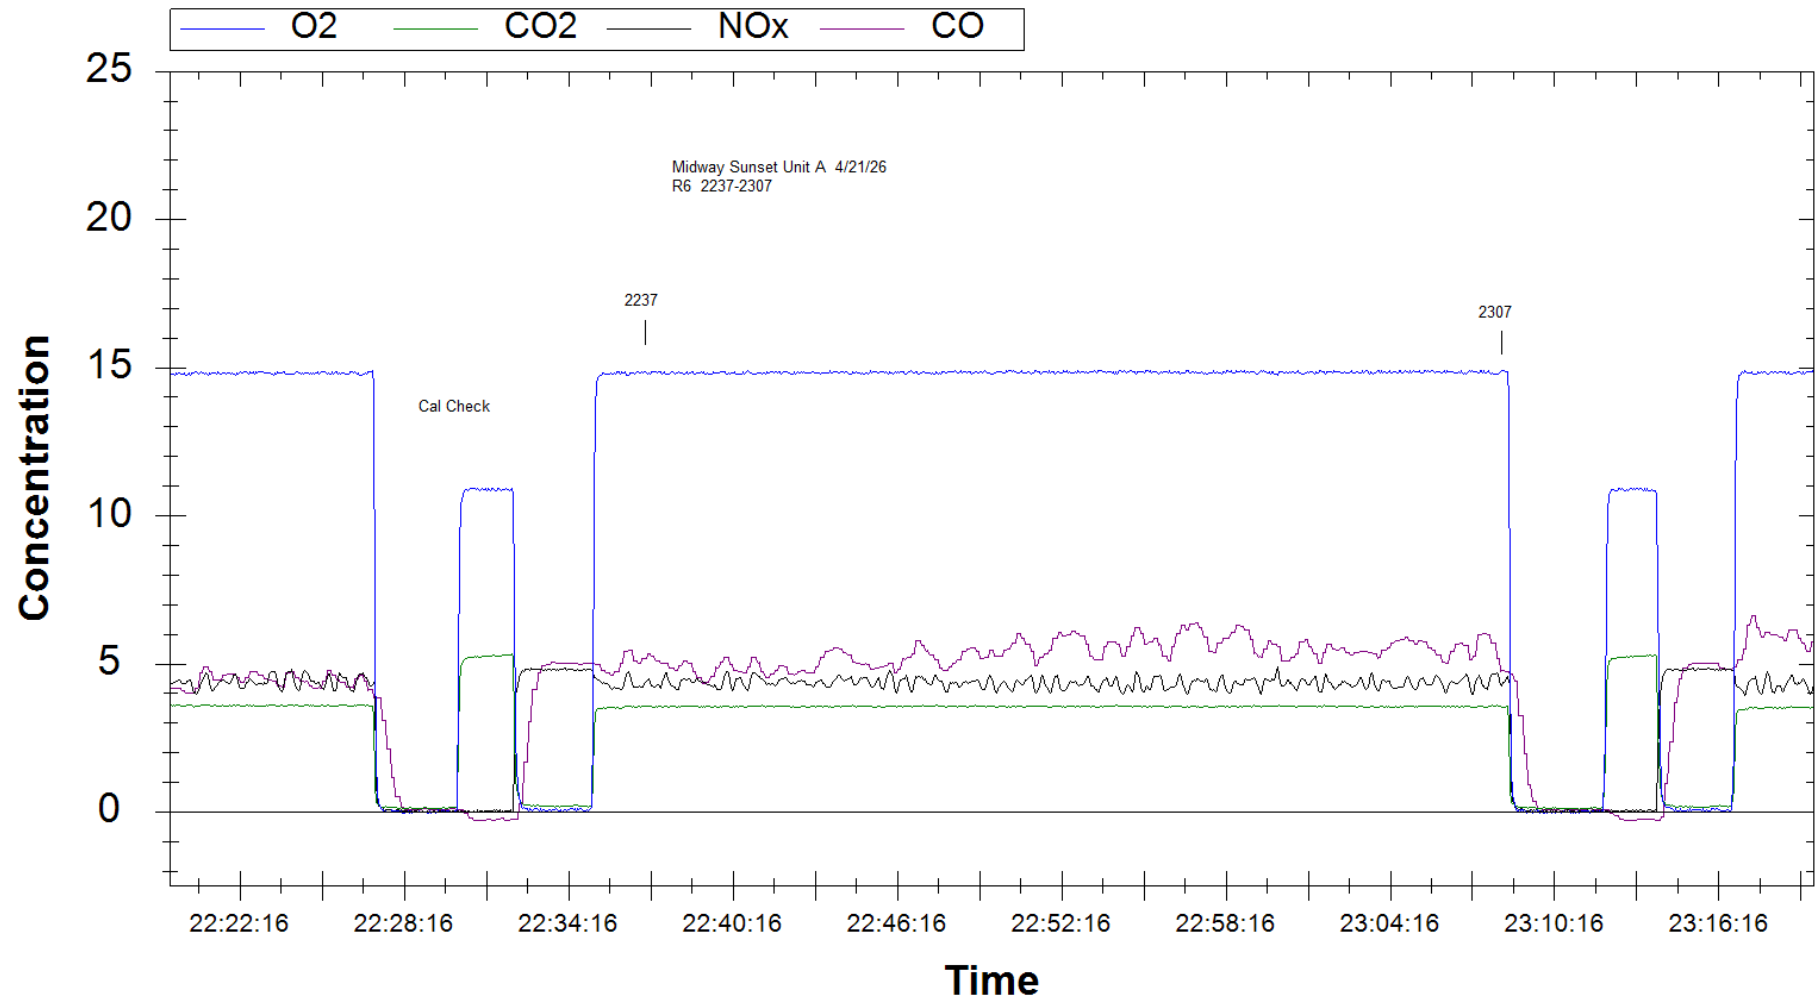


MoleDAQ Graph

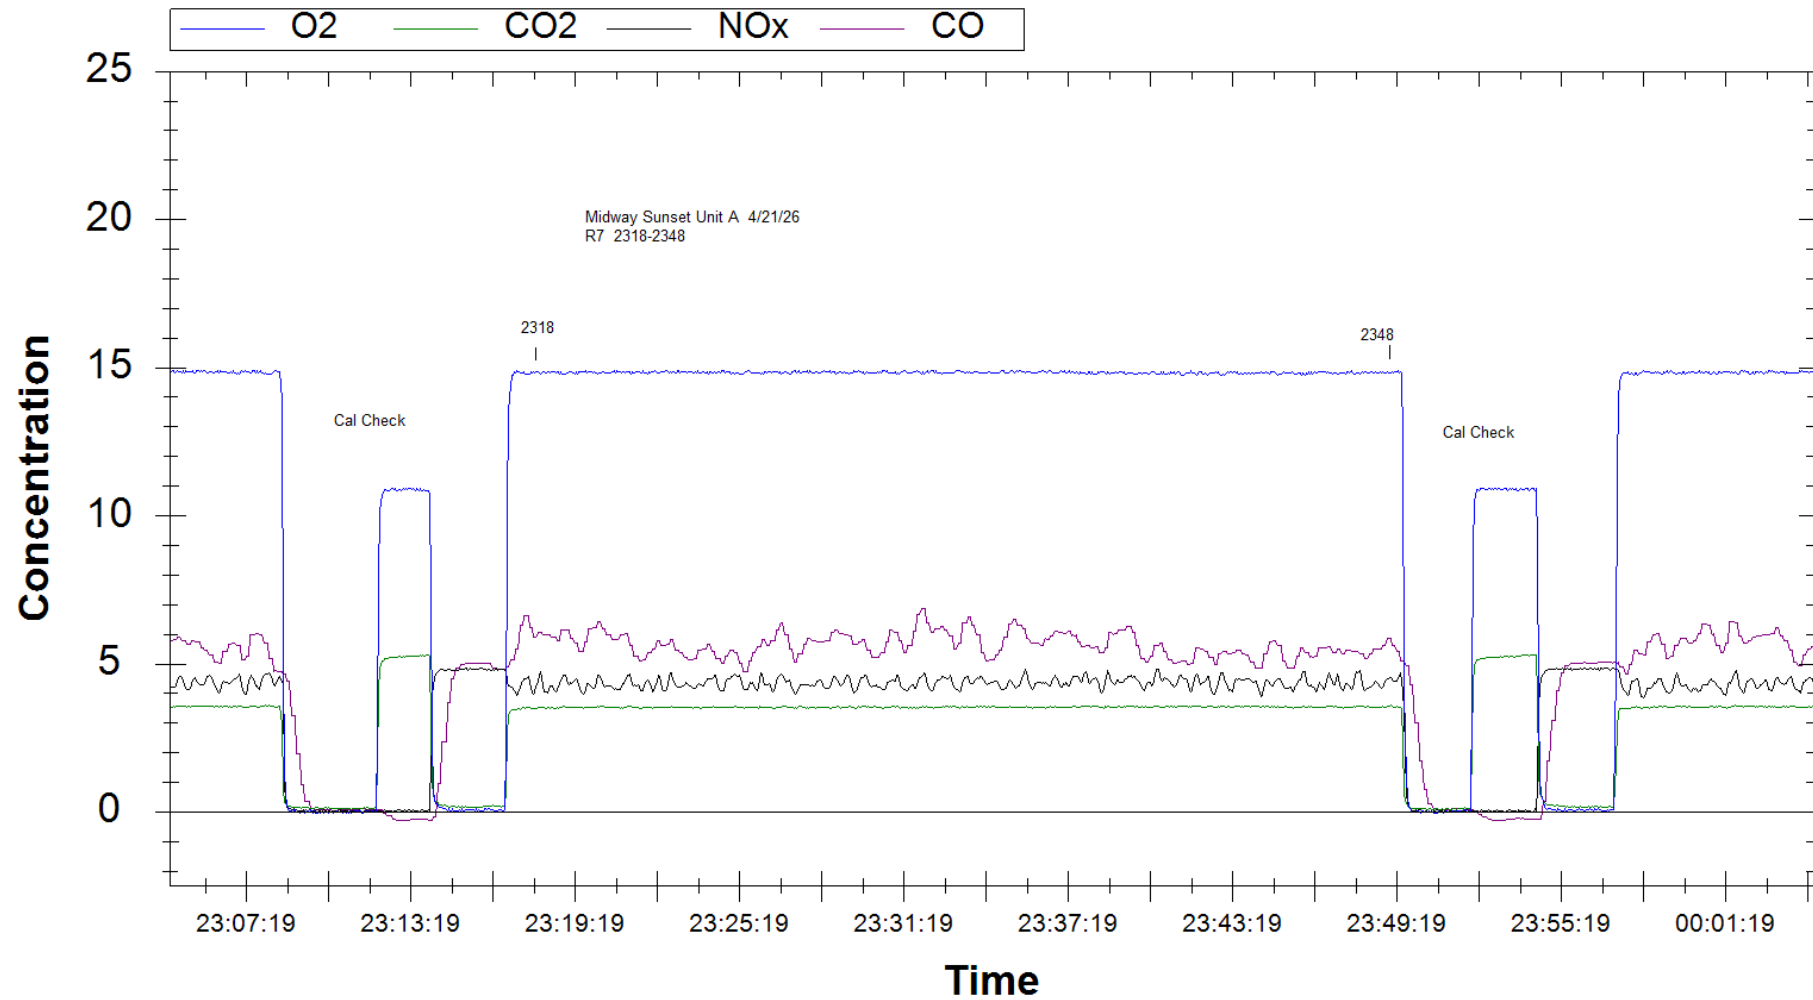


MoleDAQ Graph

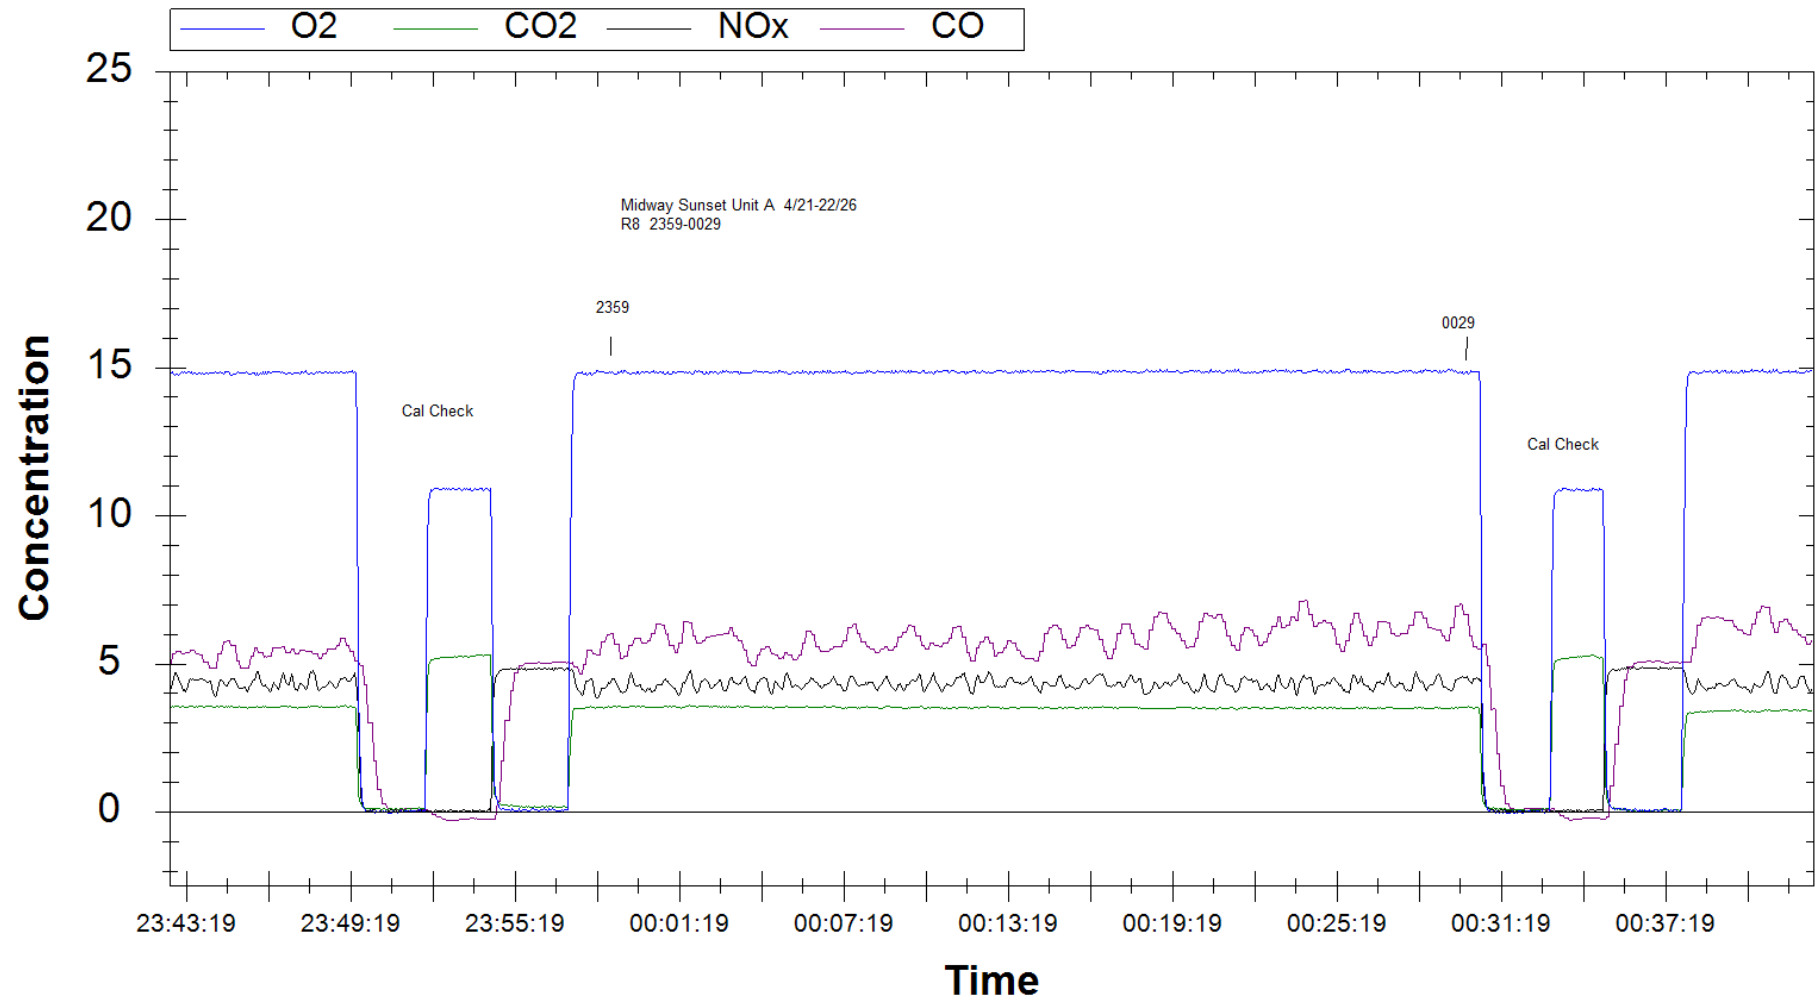

MoleDAQ Graph

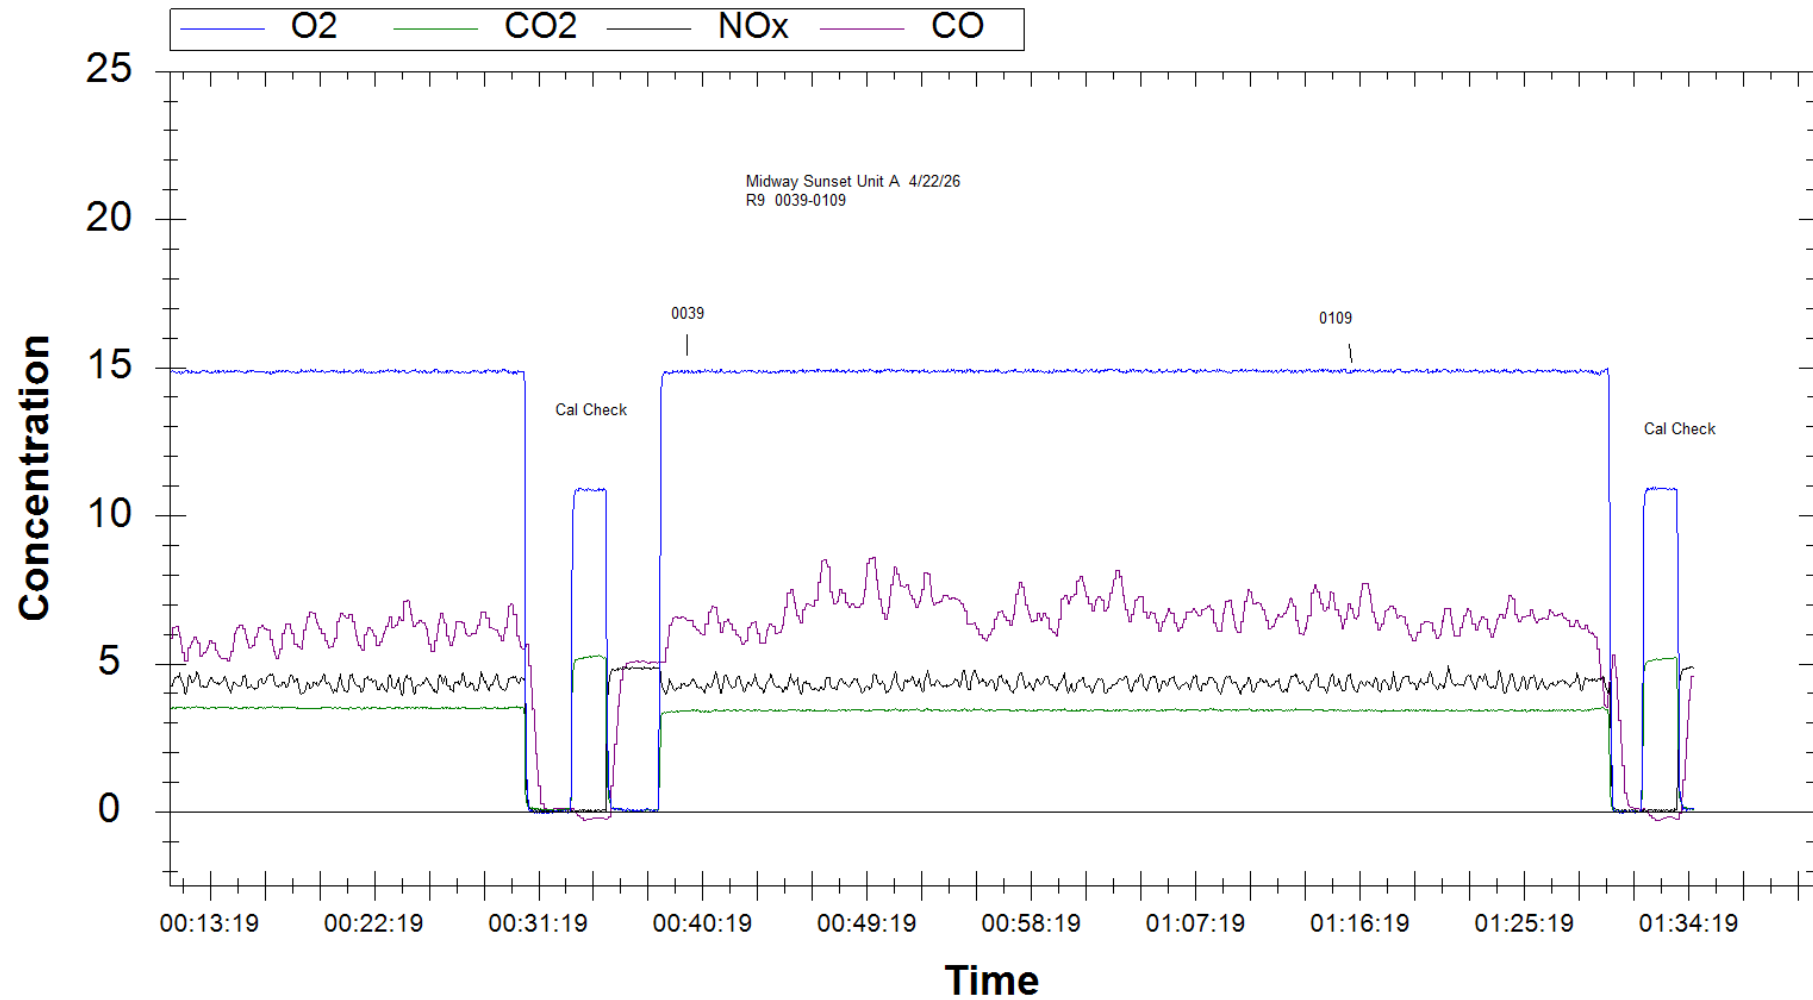

MoleDAQ Graph

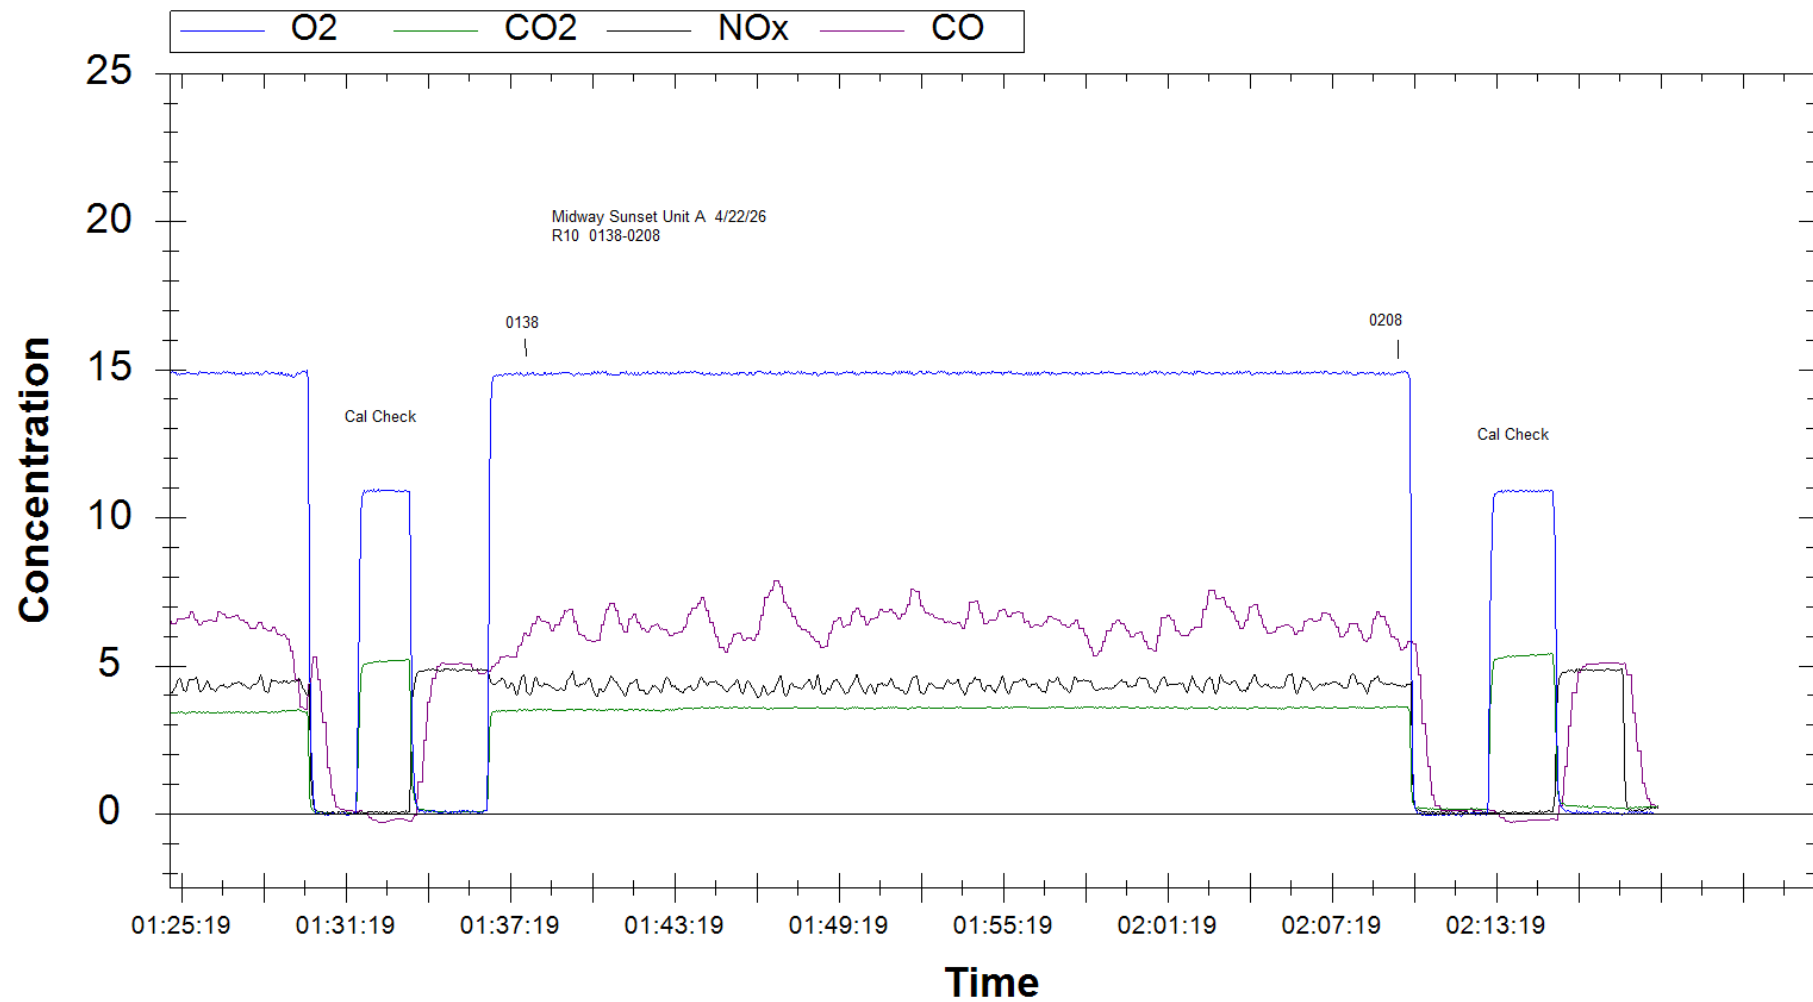



Appendix D.4

Accreditation Information/Certifications

Accredited Air Emission Testing Body

A2LA has accredited

MONTROSE AIR QUALITY SERVICES

In recognition of the successful completion of the joint A2LA and Source Evaluation Society (SES) evaluation process, this laboratory is accredited to perform testing activities in compliance with ASTM D7036:2004 - Standard Practice for Competence of Air Emission Testing Bodies.

Presented this 23rd day of January 2026.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3925.01
Valid to February 29, 2028

This accreditation program is not included under the A2LA ILAC Mutual Recognition Arrangement.

CERTIFICATE OF COMPLETION

James Polhamus

This document certifies that this individual has passed a comprehensive examination and is now a Qualified Individual (QI) as defined in Section 8.3 of ASTM D7036-04 for the following method(s):

Source Evaluation Society Group 1: EPA Manual Gas Volume and Flow Measurements and Isokinetic Particulate Sampling Methods

Certificate Number: 002B-2025-9



Tate Strickler, VP – Quality Systems

EFFECTIVE DATE: 11/3/2025

EXPIRATION DATE: 5/6/2029



MONTROSE
ENVIRONMENTAL

CERTIFICATE OF COMPLETION

James Polhamus

This document certifies that this individual has passed a comprehensive examination and is now a Qualified Individual (QI) as defined in Section 8.3 of ASTM D7036-04 for the following method(s):

Source Evaluation Society Group 3: EPA Gaseous Pollutants Instrumental Sampling Methods

Certificate Number: 002B-2024-1



Tate Strickler, VP – Quality Systems

EFFECTIVE DATE: 5/8/2024

EXPIRATION DATE: 5/7/2029



MONTROSE
ENVIRONMENTAL

CERTIFICATE OF COMPLETION

James Polhamus

This document certifies that this individual has passed a comprehensive examination and is now a Qualified Individual (QI) as defined in Section 8.3 of ASTM D7036-04 for the following method(s):

EPA Method 18

Certificate Number: 002B-2024-7



Tate Strickler, VP – Quality Systems

EFFECTIVE DATE:

7/23/2024

EXPIRATION DATE:

7/22/2029



MONTROSE
ENVIRONMENTAL



Appendix D.5

Quality Assurance Program Summary and Equipment Calibration Schedule

QUALITY ASSURANCE PROGRAM SUMMARY

As part of Montrose Air Quality Services, LLC (MAQS) ASTM D7036-04 certification, MAQS is committed to providing emission related data which is complete, precise, accurate, representative, and comparable. MAQS quality assurance program and procedures are designed to ensure that the data meet or exceed the requirements of each test method for each of these items. The quality assurance program consists of the following items:

- Assignment of an Internal QA Officer
- Development and use of an internal QA Manual
- Personnel training
- Equipment maintenance and calibration
- Knowledge of current test methods
- Chain-of-custody
- QA reviews of test programs

Assignment of an Internal QA Officer: MAQS has assigned an internal QA Officer who is responsible for administering all aspects of the QA program.

Internal Quality Assurance Manual: MAQS has prepared a QA Manual according to the requirements of ASTM D7036-04 and guidelines issued by EPA. The manual documents and formalizes all of MAQS QA efforts. The manual is revised upon periodic review and as MAQS adds capabilities. The QA manual provides details on the items provided in this summary.

Personnel Testing and Training: Personnel testing and training is essential to the production of high quality test results. MAQS training programs include:

- A requirement for all technical personnel to read and understand the test methods performed
- A requirement for all technical personnel to read and understand the MAQS QA manual
- In-house testing and training
- Quality Assurance meetings
- Third party testing where available
- Maintenance of training records.

Equipment Maintenance and Calibration: All laboratory and field equipment used as a part of MAQS emission measurement programs is maintained according to manufacturer's recommendations. A summary of the major equipment maintenance schedules is summarized in Table 1. In addition to routine maintenance, calibrations are performed on all sampling equipment according to the procedures outlined in the applicable test method. The calibration intervals and techniques for major equipment components is summarized in Table 2. The calibration technique may vary to meet regulatory agency requirements.

Knowledge of Current Test Methods: MAQS maintains current copies of EPA, ARB, and SCAQMD Source Test Manuals and Rules and Regulations.

Chain-of-Custody: MAQS maintains chain-of-custody documentation on all data sheets and samples. Samples are stored in a locked area accessible only to MAQS source test personnel. Data sheets are kept in the custody of the originator, program manager, or in locked storage until return to MAQS office. Electronic field data is duplicated for backup on secure storage media. The original data sheets are used for report preparation and any additions are initialed and dated.

QA Reviews: Periodic field, laboratory, and report reviews are performed by the in-house QA coordinator. Periodically, test plans are reviewed to ensure proper test methods are selected and reports are reviewed to ensure that the methods were followed and any deviations from the methods are justified and documented.

ASTM D7036-04 Required Information

Uncertainty Statement

Montrose is qualified to conduct this test program and has established a quality management system that led to accreditation with ASTM Standard D7036-04 (Standard Practice for Competence of Air Emission Testing Bodies). Montrose participates in annual functional assessments for conformance with D7036-04 which are conducted by the American Association for Laboratory Accreditation (A2LA). All testing performed by Montrose is supervised on site by at least one Qualified Individual (QI) as defined in D7036-04 Section 8.3.2. Data quality objectives for estimating measurement uncertainty within the documented limits in the test methods are met by using approved test protocols for each project as defined in D7036-04 Sections 7.2.1 and 12.10. Additional quality assurance information is presented in the report appendices.

Performance Data

Performance data are available for review.

Qualified Personnel

A qualified individual (QI), defined by performance on a third party or internal test on the test methods, will be present on each test event.

Plant Entry and Safety Requirements

Plant Entry

All test personnel are required to check in with the guard at the entrance gate or other designated area. Specific details are provided by the facility and project manager.

Safety Requirements

All personnel shall have the following personal protective equipment (PPE) and wear them where designated:

- Hard Hat
- Safety Glasses
- Steel Toe Boots
- Hearing Protection
- Gloves
- High Temperature Gloves (if required)

The following safety measures will be followed:

- Good housekeeping
- SDS for all on-site hazardous materials
- Confine selves to necessary areas (stack platform, mobile laboratory, CEMS data acquisition system, control room, administrative areas)
- Knowledge of evacuation procedures

Each facility will provide plant specific safety training.

TABLE 1
EQUIPMENT MAINTENANCE SCHEDULE

Equipment	Acceptance Limits	Frequency of Service	Methods of Service
Pumps	1. Absence of leaks 2. Ability to draw manufacturers required vacuum and flow	As recommended by manufacturer	1. Visual inspection 2. Clean 3. Replace parts 4. Leak check
Flow Meters	1. Free mechanical movement	As recommended by manufacturer	1. Visual inspection 2. Clean 3. Calibrate
Sampling Instruments	1. Absence of malfunction 2. Proper response to zero span gas	As recommended by manufacturer	As recommended by manufacturer
Integrated Sampling Tanks	1. Absence of leaks	Depends on nature of use	1. Steam clean 2. Leak check
Mobil Van Sampling System	1. Absence of leaks	Depends on nature of use	1. Change filters 2. Change gas dryer 3. Leak check 4. Check for system contamination
Sampling lines	1. Sample degradation less than 2%	After each test series	1. Blow dry, inert gas through line until dry

TABLE 2
MAJOR SAMPLING EQUIPMENT CALIBRATION REQUIREMENTS

Sampling Equipment	Calibration Frequency	Calibration Procedure	Acceptable Calibration Criteria
Continuous Analyzers	Before and After Each Test Day	3-point calibration error test	< 2% of analyzer range
Continuous Analyzers	Before and After Each Test Run	2-point sample system bias check	< 5% of analyzer range
Continuous Analyzers	After Each Test Run	2-point analyzer drift determination	< 3% of analyzer range
CEMS System	Beginning of Each Day	leak check	< 1 in. Hg decrease in 5 min. at 20 in. Hg
Continuous Analyzers	Semi-Annually	3-point linearity	< 1% of analyzer range
NO _x Analyzer	Daily	NO ₂ - NO converter efficiency	90%
Differential Pressure Gauges (except for manometers)	Semi-Annually	Correction factor based on 5-point comparison to standard	+/- 5%
Differential Pressure Gauges (except for manometers)	Bi-Monthly	3-point comparison to standard, no correction factor	+/- 5%
Barometer	Semi-Annually	Adjusted to mercury-in-glass or National Weather Service Station	+/- 0.1 inches Hg
Dry Gas Meter	Semi-Annually	Calibration check at 4 flow rates using a NIST traceable standard	+/- 2%
Dry Gas Meter	Bi-Monthly	Calibration check at 2 flow rates using a NIST traceable standard	+/- 2% of semi-annual factor
Dry Gas Meter Orifice	Annually	4-point calibration for $\Delta H@$	--
Temperature Sensors	Semi-Annually	3-point calibration vs. NIST traceable standard	+/- 1.5%

Note: Calibration requirements will be used that meet applicable regulatory agency requirements.



Appendix E

Regulatory Information



Appendix E.1

Regulatory Permit to Operate

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-1135-224-30

EXPIRATION DATE: 05/31/2026

SECTION: 17 **TOWNSHIP:** 31S **RANGE:** 22E

EQUIPMENT DESCRIPTION:

78.2 MW COGENERATION UNIT A WITH GE MODEL G7111E FRAME 7E GAS TURBINE ENGINE WITH DRY LOW NOX COMBUSTORS (DLN1+ TURNDOWN ENHANCE), SELECTIVE CATALYTIC REDUCTION (SCR), AND UNFIRED HEAT RECOVERY STEAM GENERATOR (HRSG)

PERMIT UNIT REQUIREMENTS

1. CTG exhaust after the SCR unit shall be equipped with continuously recording emissions monitors dedicated to this unit for NOx, CO, and O2. Continuous emissions monitors shall meet the requirements of 40 CFR Part 60, Appendices B and F, and 40 CFR Part 75, and shall be capable of monitoring emissions during startups and shutdowns as well as normal operating conditions. If relative accuracy of CEM(s) cannot be demonstrated during startup conditions, CEM results during startup and shutdown events shall be replaced with startup emission rates obtained from source testing to determine compliance with emission limits. [District Rules 2201 and 4703] Federally Enforceable Through Title V Permit
2. CTG shall be equipped with a continuously recording emission monitor preceding the SCR module measuring NOx concentration for the purposes of calculating ammonia slip. Permittee shall check, record, and quantify the calibration drift (CD) at two concentration values at least once daily (approximately 24 hours) when SCR is operated. The calibration shall be adjusted whenever the daily zero or high-level CD exceeds 5%. If either the zero or high-level CD exceeds 5% for five consecutive daily periods, the analyzer shall be deemed out-of-control. If either the zero or high-level CD exceeds 10% during any CD check, analyzer shall be deemed out-of-control. If the analyzer is out-of-control, the permittee shall take appropriate corrective action and then repeat the CD check. [District Rules 2201 and 4703] Federally Enforceable Through Title V Permit
3. Ammonia injection grid shall be equipped with operational ammonia flowmeter and injection pressure indicator. [District Rule 2201] Federally Enforceable Through Title V Permit
4. Heat recovery steam generator design shall provide space for additional selective catalytic reduction catalyst and oxidation catalyst if required to meet NOx and CO emission limits. [District Rule 2201] Federally Enforceable Through Title V Permit
5. When SCR is operated, permittee shall monitor and record exhaust gas temperature at selective catalytic reduction and oxidation catalyst inlets. [District Rule 2201] Federally Enforceable Through Title V Permit
6. When SCR is operated, ammonia shall be injected whenever the selective catalytic reduction system catalyst temperature exceeds the minimum ammonia injection temperature recommended by the manufacturer. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Gas turbine engine shall be equipped with fuel consumption monitor recorder accurate to +/- 3%. [District Rule 2201] Federally Enforceable Through Title V Permit
8. CEM for NOx (as NO2) and CO shall conform to Rule 1080 specifications. [District Rules 1080 and 4703] Federally Enforceable Through Title V Permit
9. HRSG exhaust stack shall be equipped with permanent stack sampling provisions adequate to facilitate testing consistent with EPA test methods. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: AERA ENERGY LLC
Location: HEAVY OIL WESTERN STATIONARY SOURCE, MIDWAY-SUNSET, KERN COUNTY, CA
S-1135-224-30 : May 15 2023 1:38PM - PROCOPIIS

Permit Unit Requirements for S-1135-224-30 (continued)

10. Flue gas ducting from engine to HRSG shall have no provisions for introduction of dilution air. [District Rule 1110] Federally Enforceable Through Title V Permit
11. Lube oil cooler/accumulation vent shall be equipped with control device(s) approved by the APCO sufficient to prevent emissions. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Lube oil cooler/accumulator vent(s) shall not have detectable emissions. [District Rule 2201] Federally Enforceable Through Title V Permit
13. Natural gas sulfur content shall not exceed 0.31 gr/100 scf. [District Rule 2201] Federally Enforceable Through Title V Permit
14. All CEM's shall be calibrated and operated according to EPA guidelines as specified in 40 CFR 60 Appendix B. [District Rule 1080] Federally Enforceable Through Title V Permit
15. Quarterly CEM reports shall be submitted to the APCO according to EPA regulations as specified in 40 CFR 60 Appendix B. [District Rule 4001 and District rule 1080, 8.0] Federally Enforceable Through Title V Permit
16. Audits of all monitors shall be conducted by independent laboratory in accordance with EPA guidelines and witnessed by District. Reports shall be submitted to District within 60 days of audits. [District Rule 1080] Federally Enforceable Through Title V Permit
17. All notification, recordkeeping, performance tests, reporting requirements, and compliance testing requirements of Rule 4001 NSPS shall be satisfied. [District Rule 4001] Federally Enforceable Through Title V Permit
18. Operational records including fuel type, fuel characteristics, and consumption shall be maintained and shall be made readily available for District inspection upon request. [District Rule 1070] Federally Enforceable Through Title V Permit
19. Accurate records of NO_x (as NO₂) and CO flue gas concentration corrected to 15% O₂ and fuel gas sulfur content shall be maintained and shall be reported as described in Rule 1080 upon request. [District Rule 1080] Federally Enforceable Through Title V Permit
20. Emission rates shall not exceed the following: PM₁₀: 0.010 lb/MMBtu, SO_x (as SO₂): 0.001 lb/MMBtu, NO_x (as NO₂): 0.018 lb/MMBtu, VOC: 0.009 lb/MMBtu, CO: 0.057 lb/MMBtu, and ammonia - 10 ppmvd @ 15%O₂. [District Rules 2201, 4201; and Kern County Rule 404] Federally Enforceable Through Title V Permit
21. Permittee shall comply with the following emission limit at all times except during periods of start-up, shutdown, or reduced load: NO_x (as NO₂): 5.0 ppmv, and CO: 25 ppmv, dry @ 15% O₂ corrected to ISO conditions. [40 CFR 60.332(a)(1) & 60.332(a)(2) and District Rule 4703] Federally Enforceable Through Title V Permit
22. Gas turbine engine start-up is that period of time not exceeding two hours in duration during which the unit is brought from a shutdown status to its operating temperature and pressure, including the time required by the unit's emission control system to reach full operation. [District Rules 2201 and 4703] Federally Enforceable Through Title V Permit
23. Gas turbine engine shutdown is that period of time not exceeding two hours in duration during which the unit is taken from an operational to a non-operational status by allowing it to cool down from its operating temperature to ambient temperature as the fuel supply to the unit is completely turned off. [District Rules 2201 and 4703] Federally Enforceable Through Title V Permit
24. Gas turbine reduced load period is that period not exceeding one hour in duration during which the unit is operated at less than rated capacity in order to change the position of the exhaust gas diverter gate. [District Rules 2201 and 4703] Federally Enforceable Through Title V Permit
25. Compliance with NO_x and CO emission limits shall be demonstrated by District-witnessed sample collection by independent testing laboratory on an annual basis. Compliance with NO_x, CO and ammonia emissions limits shall be demonstrated by District-witnessed sample collection by independent testing laboratory within 60 days of any use of the SCR system, unless compliance with emissions limitations has been demonstrated with the SCR system in operation within the preceding 12 month period. [District Rule 4703 and 1081] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: AERA ENERGY LLC
 Location: HEAVY OIL WESTERN STATIONARY SOURCE, MIDWAY-SUNSET, KERN COUNTY, CA
 S-1135-224-30 : May 15 2023 1:38PM -- PROCOPIS

26. Source testing shall be conducted using the methods and procedures approved by the District. The District must be notified 30 days prior to any compliance source test, and a source test plan must be submitted for approval 15 days prior to testing. [District Rule 1081] Federally Enforceable Through Title V Permit
27. The following test methods shall be used PM10: EPA method 5 (front half and back half), NOx: EPA Method 7E or 20, CO: EPA method 10 (or 10B) or CARB Method 100, O2: EPA Method 3, 3A, or 20, VOC: EPA method 18 or 25, ammonia: BAAQMD ST-1B, and fuel gas sulfur content: ASTM D3246. Alternative test methods as approved by the District may also be used to address the source testing requirements of this permit. [District Rule 1081, 40 CFR 60.335 (b), and District Rule 4703, 6.4] Federally Enforceable Through Title V Permit
28. Compliance with ammonia slip limit shall be demonstrated by using the following calculation procedure: ammonia slip ppmv @ 15% O2 = $((a - (b \times c / 1,000,000)) \times 1,000,000 / b) \times d$, where a = ammonia injection rate (lb/hr) / 17 (lb/lb. mol), b = dry exhaust gas flow rate (lb/hr) / (29 (lb/lb. mol)), c = change in measured NOx concentration ppmv at 15% O2 across catalyst, and d = correction factor. The correction factor shall be derived annually during compliance testing by comparing the measured and calculated ammonia slip. [District Rule 4102] Federally Enforceable Through Title V Permit
29. Official test results and field data shall be submitted within 60 days after collection. [District Rule 4703 and District Rule 1081] Federally Enforceable Through Title V Permit
30. All records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070 and 4703] Federally Enforceable Through Title V Permit
31. CEC emission rates, except during periods of startup, shutdown, or reduced load shall not exceed PM10: 9.98 lb/hr, SOx (as SO2): 0.92 lb/hr, NOx (as NO2): 17.66 lb/hr, VOC: 9.00 lb/hr, and CO: 54.91 lb/hr. [District Rules 2080 and 4703, and 40 CFR 60] Federally Enforceable Through Title V Permit
32. For CEC purposes, emissions during periods of startup and shutdown shall not exceed the following values average over 2 hours: NOx: 140 lb/hr, and CO: 94 lb/hr. [District Rule 2080] Federally Enforceable Through Title V Permit
33. The CEC shall be notified of any changes to the combined annual emission limits for cogeneration units S-1135-224, -225, and -226, only to the extent to be informed of their impact on the Midway-Sunset Cogeneration Facility. [District Rule 2080] Federally Enforceable Through Title V Permit
34. Results of continuous emissions monitoring must be reduced according to the procedure established in 40 CFR, Part 51, Appendix P, paragraphs 5.0 through 5.3.3, or by other methods deemed equivalent by mutual agreement with the District, the CARB, and the EPA. [Kern County Rule 108 and District Rule 1080] Federally Enforceable Through Title V Permit
35. Records shall be maintained and shall contain: the occurrence and duration of any start-up, shutdown or malfunction, performance testing, evaluations, calibrations, checks, adjustments, maintenance of any CEM's that have been installed pursuant to District Rule 1080, and emission measurements. [Kern County Rule 108; District Rules 1080 and 4703; 40 CFR 60.7 (b)] Federally Enforceable Through Title V Permit
36. The permittee shall maintain hourly average records of NOx and CO emissions. Compliance with the hourly, daily, and twelve month rolling average VOC emission limits shall be demonstrated by the CO CEM data and the VOC/CO relationship determined by annual CO and VOC source tests of NOx, CO, and ammonia emission concentrations (ppmv @ 15% O2), and hourly, daily, and twelve month rolling. [District Rules 2201 and 4703] Federally Enforceable Through Title V Permit
37. A violation of NOx emission standards indicated by the NOx CEM shall be reported by the operator to the APCO within 96 hours. [Kern County Rule 108 and District Rule 1080, 9.0] Federally Enforceable Through Title V Permit
38. Operator shall notify the APCO no later than eight hours after the detection of a breakdown of the CEM. The operator shall inform the APCO of the intent to shut down the CEM at least 24 hours prior to the event. [Kern County Rule 108 and District Rule 1080, 10.0] Federally Enforceable Through Title V Permit
39. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081 (Amended December 16, 1993), of 3 thirty-minute test runs for NOx and CO. [District Rule 1081] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

40. Unit shall be fired on a natural gas which has a sulfur content of less than or equal to 0.017% by weight. [40 CFR 60.333 (a) & (b); 40 CFR 60.334 (c)(2); Kern County Rule 407; and District Rule 4801] Federally Enforceable Through Title V Permit
41. If the turbine is fired on PUC-regulated natural gas, then maintain on file copies of natural gas bills. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
42. If the turbine is not fired on PUC-regulated natural gas, then the sulfur content of the natural gas being fired in the turbine shall be determined using method(s) specified on this permit. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
43. If the turbine is not fired on PUC-regulated natural gas, then the sulfur content of the natural gas being fired in the turbine shall be determined using ASTM method D 1072, D 3031, D 4084 or D 3246, or double GC for H₂S and mercaptans. [40 CFR 60.335 (d)] Federally Enforceable Through Title V Permit
44. If the turbine is not fired on PUC-regulated natural gas, the sulfur content of each fuel source shall be tested weekly except that if compliance with the fuel sulfur content limit has been demonstrated for 8 consecutive weeks for a fuel source, then the testing frequency shall be semi-annually. If a test shows noncompliance with the sulfur content requirement, the source must return to weekly testing until eight consecutive weeks show compliance. [40 CFR 60.334 (b)(2)] Federally Enforceable Through Title V Permit
45. Operator shall submit a semiannual report listing any daily period during which the sulfur content of the fuel being fired in the gas turbine exceeds 0.8% by weight. [40 CFR 60.334(a)(2)] Federally Enforceable Through Title V Permit
46. HHV and LHV of the fuel shall be determined using ASTM D3588, ASTM 1826, OR ASTM 1945. [40 CFR 60.332 (a),(b) and District Rule 4703, 6.4.5] Federally Enforceable Through Title V Permit
47. The operator shall provide source test information annually regarding the exhaust gas NO_x concentration corrected to 15% O₂ (dry). [40 CFR 60.332 (a),(b) and District Rule 4703, 5.1] Federally Enforceable Through Title V Permit
48. Results of continuous emission monitoring must be averaged in accordance with the requirements of 40 CFR 60.13. [40 CFR 60.334 (a),(b),(c) and District Rule 4703, 5.0] Federally Enforceable Through Title V Permit
49. Operator shall maintain a stationary gas turbine operating log that includes, on a daily basis the actual local start-up and stop time, length and reason for reduced load periods, total hours of operation and quantity of fuel used. [40 CFR 60.332 (a),(b) and District Rule 4703, 6.2.4] Federally Enforceable Through Title V Permit
50. This unit is a simple combustion turbine as defined in 40 CFR 72.6 (b)(1) and shall not be subject to the requirements of 40 CFR Part 72. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
51. Compliance with permit conditions in the Title V permit shall be deemed compliance with the following subsumed requirements: Kern County Rules 404, 108, and 108.1. A permit shield is granted from these requirements. [SJVUAPCD Rule 2520, 13.2] Federally Enforceable Through Title V Permit
52. Compliance with permit conditions in the Title V permit shall be deemed compliance with the following applicable requirements: Kern County Rule 407; District Rules 4801, 4201, 1081, and 1080, Sections 6.5, 7.2, 8.0, 9.0, and 10.0; 40 CFR 60.332 (c) and (d); 60.334 (b), (c)(2); 60.335(d). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
53. Compliance with permit conditions in the Title V permit shall be deemed compliance with the following applicable requirements: District Rule 4703, sections 5.0, 5.1.1, 6.2.1, 6.2.4, 6.3, 6.4.1, 6.4.3, 6.4.5, and 6.4.6. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
54. Compliance with permit conditions in the Title V permit shall be deemed compliance with the following subsumed requirements: District Rules 1080, 7.3 and 4703, 6.2.2; 40 CFR 60.332(a), (b); 60.333(a) and (b), 60.334(a), (b), and (c)(1); 60.335(a), (b) and (c)(2). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

55. All equipment, facilities, and systems installed or used to achieve compliance with the terms and conditions of this permit shall at all times be maintained in good working order and be operated as efficiently as possible so as to minimize air pollutant emissions. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
56. The Permittee (MSCC) must notify EPA by telephone, facsimile, or electronic mail transmission within two (2) working days following the discovery of any failure of air pollution control equipment, process equipment, or of a process to operate in a normal manner, which results in an increase in emissions above any allowable emission limit stated in any conditions where PSD is cited as the basis of the condition. In addition, the Permittee (MSCC) must notify EPA in writing within fifteen (15) days of any such failure. The notification shall include a description of the malfunctioning equipment or abnormal operation, the date of the initial malfunction, the period of time over which emissions were increased due to the failure, the cause of the failure, the estimated resultant emissions in excess of those allowed in any conditions where PSD is cited as the basis of the condition, and the methods utilized to mitigate emissions and restore normal operations. Compliance with this malfunction notification provision shall not excuse or otherwise constitute a defense to any violation of this permit or of any law or regulation that such malfunction may cause, except as provided for in the conditions where PSD is cited as the basis of the condition. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
57. A malfunction means a sudden and unavoidable breakdown of equipment or of a process beyond the reasonable control of the source. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
58. Emissions in excess of the limits specified in any conditions where PSD is cited as the basis of the condition shall constitute a violation of this permit and may be the subject of enforcement proceedings. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
59. Affirmative defense: In the context of an enforcement proceeding, emissions which are below the limits set forth in any condition where PSD is cited as the basis of the condition shall not be subject to penalty if the Permittee (MSCC) retains properly signed, contemporaneous operating logs or other relevant evidence and can demonstrate all of the following: i.) A malfunction caused the emissions in excess of the limits in any condition where PSD is cited as the basis of the condition; ii.) The permitted facility, including the air pollution control equipment and process equipment, was being properly operated at the time of the malfunction; iii.) Preventative maintenance was regularly performed in a manner consistent with good practice for minimizing emissions; iv.) The excess emissions were not part of a recurring pattern indicative of inadequate design, operation, or maintenance; v.) During the period of the malfunction, the permittee (MSCC) took all reasonable steps to minimize the amount and duration of emissions (including any bypass) that exceeded the emission limits provided in any condition where PSD is cited as the basis of the condition. Reasonable steps to minimize emissions could include, but are not limited to, reducing production to the lowest level practicable, reducing the material feed that results in the increased emissions, and switching to alternative, less polluting fuels. Where repairs were required, repairs were made in an expeditious fashion when the operator knew or should have known that applicable emission limitations were being exceeded. Off-shift labor and overtime must have been utilized, to the extent practicable, to ensure that such repairs were made as expeditiously as possible; and vi.) The permittee (MSCC) complied with the malfunction reporting requirements as specified in the condition where PSD is cited as the basis of the condition. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
60. All emissions, including those associated with a malfunction which may be eligible for an affirmative defense, must be included in all emissions calculations and demonstrations of compliance with mass emission limits (e.g., daily, monthly, and annual emission limits) specified in this permit. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
61. This provision is in addition to any emergency or malfunction provision contained in any applicable requirement or elsewhere in this permit. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
62. The EPA Regional Administrator, and/or their authorized representative, upon the presentation of credential, must be permitted: (1) to enter the premises where the source is located or where any records are required to be kept under the terms and conditions of the PSD permit SJ-87-01; and (2) at reasonable times to have access to and copy any records required to be kept under the terms and conditions of PSD permit SJ 87-01; and (3) to inspect any equipment, operation, or method required in the PSD permit SJ-87-01; and (4) to sample emissions from source(s). [PSD SJ-87-01] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

63. In the event of any changes in control or ownership of facilities to be constructed or modified, this permit shall be binding on all subsequent owners and operators. The Permittee (MSCC) shall notify the succeeding owner and operator of the existence of the PSD permit SJ-87-01 and its conditions by letter, a copy of which shall be forwarded to the EPA. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
64. The provisions of the PSD permit SJ-87-01 are severable, and, if any provisions of the permit is held invalid, the remainder of the permit must not be affected thereby. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
65. The permittee (MSCC) must construct and operate the proposed power plant in compliance with all other applicable provisions of 40 CFR Parts 52, 60, 62, and 63 and all other applicable Federal, State, and local air quality regulations. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
66. On or before the date of startup (as defined in 40 C.F.R. 60.2) of the Western Midway Sunset Cogeneration Project (WMSCP; PSD Permit No. SJ-00-01) and thereafter the Permittee (MSCC) must install, continuously operate, and maintain the Dry Low NOx (DLN) combustion systems to reduce NOx emissions from each of its three turbines. The Permittee (MSCC) shall also use proper combustion techniques for the control of CO emissions from the equipment at MSCP. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
67. Within 60 days after achieving the base load, but no later than 180 days after initial startup of all three modified turbines (as defined in 40 C.F.R. 60.2), and annually thereafter (at about the anniversary of the initial performance test), the Permittee (MSCC) must conduct performance tests (as described in 40 C.F.R. 60.8) for NOx, and CO on the exhaust stack gases. The Permittee (MSCC) must furnish the District, the California Air Resources Board (CARB), and the EPA a written report of the results of such tests. Upon written request from the Permittee (MSCC), and adequate justification, EPA may waive a specific annual test and/or allow for testing to be done at less than maximum operating capacity. [PSD SJ 87-01] Federally Enforceable Through Title V Permit
68. Performance tests for the emissions of NOx, and CO must be conducted and the results reported in accordance with the test methods set forth in 40 C.F.R. 60.8 and 40 C.F.R. 60, Appendix A. The following test methods must be used: a.) Performance tests for the emissions of NOx must be conducted using EPA Method 1-4 and 7E. b.) Performance tests for the emissions of CO must be conducted using the EPA Methods 1-4 and 10. In lieu of the above-mentioned test methods, equivalent methods may be used with prior written approval from EPA. The Permittee (MSCC) must notify EPA in writing at least 30 days prior to such tests to allow time for the development of an approvable performance test plan and to arrange for an observer to be present at the test. [PSD SJ 87-01] Federally Enforceable Through Title V Permit
69. For performance test purposes, sampling ports, platforms, and access must be provided by the Permittee on the emission unit exhaust system in accordance with 40 C.F.R. 60.8(e). [PSD SJ 87-01] Federally Enforceable Through Title V Permit
70. On and after the date of startup of the WMSCP (PSD Permit No. SJ-00-01), the Permittee (MSCC) must not discharge or cause the discharge of CO into the atmosphere in excess of the following emission limits per turbine: The more stringent of 25 ppmvd @ 15% O2 or 55 pounds per hour, based on 3-hour rolling average. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
71. This condition applies prior to the startup of the WMSCP: On and after the date of start up any of the three turbines at MSCP must not discharge (per turbine, and based on 3-hour rolling average) into the atmosphere CO in excess of the following of any of: 1.) The more stringent of 52.0 ppmvd @ 15% O2 or 94 pounds for loads greater than or equal to 75%. 2.) The more stringent of 62.0 ppmvd @ 15% O2 or 94 pounds for loads greater than or equal to 35% but less than 75%. 3.) 94 pounds per hour for loads less than 35%. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
72. On and after the date of startup of the WMSCP (PSD Permit No. SJ-00-01), the Permittee (MSCC) must not discharge or cause the discharge of NOx into the atmosphere in excess of the following emission limits per turbine: The more stringent of 10 ppmvd @ 15% O2 or 36.1 pounds per hour, based on 3-hour rolling average. [PSD SJ-87-01] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
 These terms and conditions are part of the Facility-wide Permit to Operate.

73. This condition applies prior to the startup of the WMSCP: On and after the date of start-up of any of the three turbines, MSCC must not discharge (per turbine, based on 3-hour rolling average) into the atmosphere NO_x (as NO₂) in excess of the following: 1.) The more stringent of 25.0 ppmvd @ 15% O₂ or 85.0 pounds per hour for loads greater than or equal to 75%; 2.) The more stringent of 42.0 ppmvd @ 15% O₂ or 85 pounds per hour for loads greater than or equal to 35% but less than 75%; 3.) 85 pounds per hour for loads less than 35%. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
74. The hourly (3-hour averaging) emissions must not exceed: 1.) 94 pounds of CO and 85 pounds of NO_x; 2.) All CEMs must be operating during startups and shut downs; 3.) The time, date and duration of each startup and shutdown event must be recorded. The records must include the lbs/hour calculations based on the CEM data. These records must be kept for five years following the date of such events. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
75. Prior to the date of startup and thereafter, the Permittee (MSCC) must install, maintain and operate the following continuous monitoring systems (CEMs) in the exhaust stacks: a.) Continuous monitoring systems to measure stack gas NO_x, CO and O₂ concentrations. The systems must meet EPA monitoring performance specification (40 C.F.R. 60.13 and 40 C.F.R. 60, Appendix B, Performance Specifications 2, 3 and 4); b.) A continuous monitoring system to measure stack gas and natural gas volumetric flow rates. The stack gas flow measurement system must meet EPA Performance Specifications for (40 C.F.R. Part 52, Appendix E). [PSD SJ-87-01] Federally Enforceable Through Title V Permit
76. The Permittee (MSCC) must maintain a file of all measurements, including continuous monitoring systems evaluations; all continuous monitoring systems or monitoring device calibration checks; adjustments and maintenance performed on these systems or devices; performance and all other information required by 40 C.F.R. 60 Appendices A-B recorded in a permanent form suitable for inspection. The file must be retained for five years following the date of such measurements, maintenance, reports and records. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
77. The Permittee (MSCC) must notify EPA of the date on which demonstration for the continuous monitoring system performance commences (40 C.F.R. 60.13). This date must be no later than 60 days after full load operation but not later than 180 days after startup. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
78. The Permittee (MSCC) must submit a written report of all excess emissions to EPA for every calendar quarter. The quarterly report must include the following: a.) The magnitude of the excess emissions computed in accordance with 40 C.F.R. 60.13(h), any conversion factors used, and the date and time of commencement and compilation of each time period of excess emissions; b.) Specific identification of each period of excess emissions that occurs during startups, shutdowns, and malfunctions of any equipment. The nature and cause of any malfunction (if known) and the corrective action taken or preventative measures adopted must also be reported; c.) The date and time identifying each period during which the continuous monitoring system was inoperative except for zero and span checks, and the nature of the system repairs or adjustments; d.) When no excess emissions have occurred or the continuous monitoring system has not been inoperative, repaired, or adjusted, such information must be stated in the report; and e.) Excess emissions must be defined as any 3-hour period during which the average emissions of CO, as measured by the CEM exceeds the maximum emission limits set forth in the condition with a CO emission limit, where PSD is cited as the basis of the condition or any 3-hour period during which the average emissions of NO_x exceed the maximum emission limits set forth in the condition with a NO_x emission limit, where PSD is cited as the basis of the condition. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
79. Excess emissions indicated by the CEM system must be considered violations of the applicable emission limit for the purpose of this permit. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
80. The quality assurance project plan used by the Permittee (MSCC) for the certification and operation of the continuous emissions monitors, which meets the requirements of 40 C.F.R. Part 60, Appendix F, must be available upon request to EPA. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
81. The Permittee (MSCC) must keep a monthly record of all fuel uses. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
82. The proposed power plant is subject to the federal regulations entitled Standards of Performance for New Stationary Sources (40 C.F.R. 60). The owner or operator must meet all applicable requirements of 40 C.F.R. 60 Subparts A and GG of this regulation. [PSD SJ-87-01] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

83. All three turbines will fire natural gas only. The Permittee (MSCC) must only combust pipeline quality natural gas with sulfur content (as S) below 0.75 grains per 100 dry standard cubic feet (dscf). [PSD SJ-87-01] Federally Enforceable Through Title V Permit
84. MSCC shall have legal and operational responsibility and control of all air pollutant emitting activities of the MSCP. This responsibility shall include, but shall not be limited to the following: 1.) Operating and maintaining the project to comply with all federal, state, and local air pollution laws, regulations, orders, and other requirements; 2.) Ensuring the emissions offsets, tradeoffs, or other emission reductions required for this project under permits issued by the U.S. EPA, the District, and/or the California Energy Commission are obtained as required; or 3.) Any violations of any air pollution requirements are the legal responsibility of MSCC, in addition to any other legal responsible entity. Any proposed change to this condition shall require prior written concurrence of the US EPA. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
85. The allowable incidental taking (killing, harming, or harassment) of San Joaquin kit foxes, blunt-nosed leopard lizards, and giant kangaroo rats is confined to the proposed cogeneration plant site one half mile radius around this site (on lands owned or leased by Aera Energy LLC), and associated subject cogeneration plant facilities (including pipelines, transmission lines, temporary equipment stockpiling areas, and access roads) as discussed in the project Application for Certification report (Sun Cogeneration Company and Southern Sierra Energy Company 1985). [PSD SJ-87-01] Federally Enforceable Through Title V Permit
86. MSCC is required to implement the "Agreement on Conditions for Mitigation of the Biological Impacts of the Midway-Sunset Project" as required by the U.S. Fish and Wildlife Service (USFWS) (Memorandum dated March 16, 1987 from the USFWS to the US EPA). [PSD SJ-87-01] Federally Enforceable Through Title V Permit
87. Any endangered species found dead should be turned in to the California Department of Fish and Game for Analysis. MSCC must also report this event to the USFWS. The USFWS may recommend amendment to the existing project actions pending results of the analysis. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
88. All correspondence as required by this permit shall be forwarded to: 1.) Director, Air Division (Attn: Air-3) EPA Region IX 75 Hawthorne Street San Francisco, CA 94105-3901 Tel: (415) 744-1291 Fax: (415) 744-1076; 2.) Chief, Stationary Source Division, California Air Resource Board P.O. Box 2815 Sacramento, CA 95812; and 3.) Air Pollution Control Officer, San Joaquin Valley Unified APCD 34946 Flyover Court Bakersfield, CA 93308. [PSD SJ-87-01] Federally Enforceable Through Title V Permit
89. MSCC is jointly owned by Sun Cogeneration Limited Partnership (Sun Cogen LP) and San Joaquin Energy Company. Sun Cogen LP is managed and controlled by a wholly owned subsidiary of Aera Energy LLC. (See Condition 104) [PSD SJ-87-01] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.



This is the Last Page of This Document

If you have any questions, please contact one of the following individuals by email or phone.

Name: Jim Polhamus

Title: Client Project Manager

Region: West

Email: jpolhamus@montrose-env.com

Phone: 661-333-6245

Name: John Peterson

Title: District Manager

Region: West

Email: JPeterson@montrose-env.com

Phone: 714-279-6777