

DOCKETED	
Docket Number:	01-AFC-25C
Project Title:	Malburg Generating Station-Compliance
TN #:	229264
Document Title:	Quarterly Compliance Report Second Quarter 2019
Description:	Quarterly Compliance Report- Second Quarter 2019
Filer:	Anwar Ali
Organization:	Bicent (California) Malburg LLC
Submitter Role:	Applicant
Submission Date:	8/7/2019 1:54:46 PM
Docketed Date:	8/7/2019



MALBURG GENERATING STATION

4963 Soto Street
Vernon, CA 90058
Telephone: (323) 476-3610
Fax: (323) 476-3640

29 July 2019

Mr. Anwar Ali
Compliance Project Manager
California Energy Commission
Energy Facilities Siting Division
1516 9th Street, MS 2000
Sacramento, CA 95814-5512

Subject: Malburg Generating Station
2019 Q2 Compliance Report

Dear Mr. Ali:

On behalf of the owner of the Malburg Generating Station, Bicent (California) Malburg LLC, Colorado Energy has compiled the attached Quarterly Compliance Report per the California Energy Commission Decision 01-AFC-25.

Please contact me at (303) 607-5590 or kmccormack@coloradoenergy.com if you have any questions or need additional information.

Sincerely,

Kyle McCormack
Environmental Manager

Attachments:

MGS 2019 Q2 CEC Report

**QUARTERLY COMPLIANCE REPORT
(Second Quarter 2019)**

**MALBURG GENERATING STATION
4963 SOTO STREET, VERNON, CA 90058**

**SUBMITTED TO:
CALIFORNIA ENERGY COMMISSION
1516 9TH STREET, SACRAMENTO, CA 95814**

Contents

LIST OF TABLES.....	iii
LIST OF FIGURES	iii
SECTION 1 INTRODUCTION.....	1
1.1 PROJECT LOCATION AND DESCRIPTION	1
1.2 ORGANIZATION OF THE QUARTERLY COMPLIANCE REPORT	1
SECTION 2 COMPLIANCE DETAILS.....	1
2.1 CONDITION OF CERTIFICATION AQ-C6.....	1
2.2 CONDITION OF CERTIFICATION AQ-C7	1
2.3 CONDITION OF CERTIFICATION AQ-C8.....	1
2.4 CONDITION OF CERTIFICATION AQ-C9.....	2
2.5 CONDITION OF CERTIFICATION AQ-C10.....	2
2.6 CONDITION OF CERTIFICATION AQ-C11	2
2.7 CONDITION OF CERTIFICATION AQ-2	3
2.8 CONDITION OF CERTIFICATION AQ-3	3
2.9 CONDITION OF CERTIFICATION AQ-5	3
2.10 CONDITION OF CERTIFICATION AQ-6	3
2.11 CONDITION OF CERTIFICATION AQ-8	4
2.12 CONDITION OF CERTIFICATION AQ-9	4
2.13 CONDITION OF CERTIFICATION AQ-10	5
2.14 CONDITION OF CERTIFICATION AQ-11	5
2.15 CONDITION OF CERTIFICATION AQ-12	5
2.16 CONDITION OF CERTIFICATION AQ-13	6
2.17 CONDITION OF CERTIFICATION AQ-14	6
2.18 CONDITION OF CERTIFICATION AQ-15	6
2.19 CONDITION OF CERTIFICATION NUMBER AQ-27	6

LIST OF TABLES

- 2-1 Cooling Tower TDS Sampling Results
- 2-2 Cooling Tower Daily PM10 Emissions During April
- 2-3 Cooling Tower Daily PM10 Emissions During May
- 2-4 Cooling Tower Daily PM10 Emissions During June
- 2-5 Diesel Fuel Fired Emergency Firewater Pump Testing Times
- 2-6 AQ-C10 Emission Limits, lbs/hr
- 2-7 AQ-C10 Emission Limits, lbs/day
- 2-8 Maximum Hourly Emissions
- 2-9 Maximum Daily Emissions
- 2-11 Total Monthly Emissions during April
- 2-12 Total Monthly Emissions during May
- 2-13 Total Monthly Emissions during June
- 2-14 Combustion Turbines Startup and Shutdown Events
- 2-15 Combustion Turbines and Duct Burners Gas Usage

LIST OF FIGURES

- 2-1 Cooling Tower Blowdown Reports
- 2-2 Excess Emissions Reports
- 2-3 Chevron GST Oil Specifications
- 2-4 Cooling Tower PM10

SECTION 1

INTRODUCTION

This Quarterly Compliance Report (QCR) has been prepared to meet the California Energy Commission (CEC) requirements for the Malburg Generating Station (MGS). This QCR fulfills various Conditions of Certifications as described in the California Energy Commission's Decision, May 2003..

1.1 PROJECT LOCATION AND DESCRIPTION

The Malburg Generating Station is located at 4963 Soto Street on approximately 3.4 acres, in an industrial land use area. MGS is located near the geographic center of metropolitan Los Angeles County. MGS consists of two Alstom GTX-100 frame type natural gas combustion turbine generators (CTGs); two heat recovery steam generators (HRSG); a steam turbine-generator (STG); a cooling tower, a diesel fuel fired emergency firewater pump and support equipment.

The commissioning of MGS was completed in October 2005 and the power plant began Commercial Operation on October 17, 2005.

1.2 ORGANIZATION OF THE QUARTERLY COMPLIANCE REPORT

A summary of each condition of certification and required means of verification are provided in Section 2. Each sub-section also contains a description of the method used by MGS to demonstrate compliance with the verification requirements and references to Appendices, Figures and Tables as appropriate.

SECTION 2

COMPLIANCE DETAILS

The compliance details for various conditions of certification are provided below.

2.1 CONDITION OF CERTIFICATION AQ-C6

As per the Condition of Certification Number AQ-C6, MGS shall determine the Total Dissolved Solids (TDS) levels in the blowdown water by independent laboratory testing prior to initial operation and periodically thereafter.

For verification of the above condition of certification, the CEC requires MGS to submit weekly TDS reports for the blowdown water as part of the quarterly emission report to the Compliance Project Manager (CPM) for approval.

As demonstration of compliance, the weekly TDS results are provided in Table 2-1, and the weekly sample reports during operation are provided in Figure 2-1.

2.2 CONDITION OF CERTIFICATION AQ-C7

As per the Condition of Certification Number AQ-C7, particulate matter of diameter less than 10 microns (PM₁₀) emissions from the cooling tower shall not exceed 6.2 lb/day.

Compliance with the PM₁₀ daily emission limit shall be demonstrated as follows:

$$\text{PM}_{10} \text{ lb/day} = A * B * C * D$$

Where:

- A = circulating water recirculation rate
- B = total dissolved solids concentration in the blowdown water to be updated on a weekly basis
- C = design drift rate
- D = correction factor

For verification of the above condition of certification, the CEC requires the project owner to calculate the daily PM₁₀ emissions from the cooling tower and submit all calculations and results on a quarterly basis in the quarterly emissions reports to the CPM for approval.

As demonstration of compliance, the daily PM₁₀ emissions from the cooling tower are provided in Tables 2-2 through 2-4.

2.3 CONDITION OF CERTIFICATION AQ-C8

As per the Condition of certification Number AQ-C8, the project owner shall refrain from testing the firewater pump during the same day as either gas fired combustion turbines is started up or shut down as defined by Condition of Certification AQ-C9.

For verification of the above condition of certification, the CEC requires MGS to submit to the CPM for approval all testing times and results of the diesel fired emergency firewater pump in the quarterly emissions report.

As demonstration of compliance, the testing times for the diesel fired emergency firewater pump are provided in Table 2-5. MGS refrained from testing the diesel fired

emergency firewater pump on the same day the combustion turbines were either started or shutdown.

2.4 CONDITION OF CERTIFICATION AQ-C9

As per the Condition of certification Number AQ-C9, MGS shall use the provided definitions to determine compliance with startup, shutdown and any related emission or operational limitations.

For verification of the above condition of certification, the CEC requires MGS to submit to the CPM for approval, a record of all startups and shutdowns including duration and date of occurrence on a quarterly basis as part of the quarterly emission report.

As demonstration of compliance, the startup and shutdown details as defined by the decision modifications issued in March, 2014 are provided in Table 2-14.

2.5 CONDITION OF CERTIFICATION AQ-C10

As per the condition of certification number AQ-C10, MGS shall operate within the emission limits provided in Tables 2-6 and 2-7.

For verification of the above condition of certification, the CEC requires MGS to submit to the CPM for approval on a quarterly basis all emission records and calculations to demonstrate compliance with the emission limits stated herein as part of the quarterly emissions report.

As demonstration of compliance, the maximum hourly and daily emissions of CO, NO_x, PM₁₀, VOC, and SO_x are provided in Tables 2-8 and 2-9. CO and NO_x emissions data, provided in Tables 2-8 and 2-9, do not include substituted data. The substitution procedure is followed for reporting emissions to the South Coast Air Quality Management District (SCAQMD) or Environmental Protection Agency when there may be a problem with the Continuous Emission Monitoring System (CEMS). Also, the turbine emissions estimates for PM₁₀, SO_x, and VOCs are calculated using the original manufacturer's emission factors and do not represent actual emissions.

2.6 CONDITION OF CERTIFICATION AQ-C11

As per the Condition of Certification Number AQ-C11, MGS shall submit a quarterly emissions report on a quarterly basis to the CPM for approval. The quarterly emissions report shall generally report all ammonia, NO_x, SO_x, CO, PM₁₀ and VOC emissions from the MGS as necessary to demonstrate compliance with all emission limits. The fourth quarter emission report shall include an annual summary of all emissions of ammonia, NO_x, SO_x, CO, PM₁₀ and VOC as necessary to demonstrate compliance with all annual emission limits.

For verification of the above condition of certification, the CEC requires MGS to submit the quarterly emissions report no less than 30 days after the end of each calendar quarter.

As demonstration of compliance, the maximum hourly and daily emissions of NO_x, SO_x, CO, PM₁₀ and VOC are provided in Tables 2-8 and 2-9.

2.7 CONDITION OF CERTIFICATION AQ-2

As per the Condition of Certification Number AQ-2, MGS shall not use diesel oil containing sulfur compounds in excess of 15 ppm by weight as supplied by the supplier.

For verification of the above condition of certification, the CEC requires MGS to submit fuel purchase records for approval to the CPM on a quarterly basis in the quarterly emissions report.

Low sulfur diesel fuel was purchased May 20, 2019.

2.8 CONDITION OF CERTIFICATION AQ-3

As per the Condition of Certification Number AQ-3, MGS shall keep records, in a manner approved by the District, for the following parameter(s) or item(s): Purchase records of fuel oil and sulfur content of the fuel.

For verification of the above condition of certification, the CEC requires MGS to submit fuel purchase records for approval to the CPM on a quarterly basis in the quarterly emissions report.

Low sulfur diesel fuel was purchased May 20, 2019.

2.9 CONDITION OF CERTIFICATION AQ-5

As per the condition of certification number AQ-5, MGS shall limit the emissions from both gas fired combustion turbine-heat recovery steam generator train exhaust stacks as follows:

Contaminant Emissions Limit

- CO 7,633 lbs in any one month
- PM₁₀ 4,876 lbs in any one month
- VOC 3,236 lbs in any one month
- SO_x 214 lbs in any one month

For verification of the above condition of certification, the CEC requires the MGS to submit all emission calculations, fuel use and a summary demonstrating compliance of all emission limits stated in this condition for approval to the CPM on a quarterly basis in the quarterly emissions report.

As demonstration of compliance, the monthly emissions of CO, PM₁₀, VOC, and SO_x are presented in Tables 2-11 through 2-13. In addition, the fuel usage for the two turbine-duct burner pairs is provided in Table 2-15. MGS calculates the emission limit(s) for CO based on readings from the certified CEMS. In the event the CO CEMS is not operating or the emissions exceed the valid upper range of the analyzer, the emissions are calculated in accordance with the approved CEMS Plan. MGS calculates the emission limit(s) by using the monthly fuel use data and the following emission factors:- PM₁₀: 7.397 lb/mmescf, VOC: 1.63 lb/mmescf & SO_x: 0.28lb/mmescf.

2.10 CONDITION OF CERTIFICATION AQ-6

As per the condition of certification numbers AQ-6; following commissioning, start-ups shall not exceed 120 minutes during a cold start-up without a trip, and 150 minutes

during a cold start-up with a trip. Cold start-ups with or without a trip shall not exceed the following limits: NO_x 122.8 lbs, CO 204.8 lbs and VOC 1.75 lbs.

Start-ups shall not exceed 90 minutes during a non-cold start-up without a trip or 120 minutes during a non-cold start-up with a trip. Non-cold start-ups shall not exceed the following limits: NO_x 51.3 lbs, CO 59.9 lbs, and VOC 1.55 lbs.

Shut-downs shall not exceed 30 minutes. Shut-downs shall not exceed the following limits: NO_x 4.5 lbs, CO 10.8 lbs, and VOC 0.71 lbs.

The number of startups shall not exceed two per day per turbine.

For verification of the above condition of certification, the CEC requires the MGS to submit a record of all startups and shutdowns including duration and date of occurrence on a quarterly basis as part of the quarterly emission report.

As demonstration of compliance, the startup and shutdown details are provided in Table 2-14. Additionally, quarterly excess emission reports from the DAHS are provided in Figure 2-2.

2.11 CONDITION OF CERTIFICATION AQ-8

As per the Condition of Certification Number AQ-8, the 80.13 lb/mmscf NO_x emission limit(s) shall only apply during interim period to report RECLAIM emissions. The interim period shall not exceed 12 months from the initial start-up date.

For verification of the above condition of certification, the CEC requires MGS to submit to the CPM for approval all emissions and emission calculations on a quarterly basis as part of the quarterly emissions report.

The lb/mmscf NO_x emission limit(s) referenced in the above condition of certification applied only during the interim period which ended 12 months from the initial start-up date. There is no NO_x lb/mmscf limit currently in place and therefore no supporting emission calculation is in place.

2.12 CONDITION OF CERTIFICATION AQ-9

As per the Condition of Certification Number AQ-9, the 2 PPM oxides of nitrogen (NO_x) emissions limit(s) are averaged over 1 hour at 15 percent oxygen, dry basis, during the normal operation of the MGS combustion turbine generators.

For verification of the above condition of certification, the CEC requires MGS to submit to the CPM for approval all emissions and emission calculations on a quarterly basis as part of the quarterly emissions report.

NO_x emission for MGS Units 1 and 2 are measured using the CEMS. A review of CEMS NO_x emission data indicated that the maximum corrected NO_x emissions concentration for both MGS combustion turbines during normal operations was 2 ppm, which is compliant with the emission concentration limit of 2 ppm. All CEMS data for MGS combustion turbines are stored electronically at MGS. As demonstration of compliance, quarterly excess emission reports from the DAHS are provided in Figure 2-2.

2.13 CONDITION OF CERTIFICATION AQ-10

As per the Condition of Certification Number AQ-10 the 2 PPM carbon monoxide (CO) emissions limit(s) are averaged over 3 hour at 15 percent oxygen, dry basis, during the normal operation of the MGS combustion turbine generators.

For verification of the above condition of certification, the CEC requires MGS to submit to the CPM for approval all emissions and emission calculations on a quarterly basis as part of the quarterly emissions report.

CO emission for MGS Units 1 and 2 are measured using the CEMS. A review of CEMS CO emission data indicated that maximum CO emission concentration for both MGS combustion turbines was 1.0 ppm, which is lower than the emission concentration limit of 2 ppm. All CEMS data for MGS combustion turbines are stored electronically at MGS. As demonstration of compliance, quarterly excess emission reports from the DAHS are provided in Figure 2-2.

2.14 CONDITION OF CERTIFICATION AQ-11

As per the Condition of Certification Number AQ-11, the 2 ppm reactive organic gases (ROG) emission limit(s) are averaged over 1 hour at 15 percent oxygen, dry basis.

For verification of the above condition of certification, the CEC requires MGS to submit to the CPM for approval all emissions and emission calculations on a quarterly basis as part of the quarterly emissions report.

ROG emissions are not monitored on an hourly basis and compliance with 2 ppm limit is demonstrated by source testing. The last compliance source test, performed in February 2017 indicated compliance with the emission limits for CT1 and CT2.

2.15 CONDITION OF CERTIFICATION AQ-12

As per the Condition of Certification Number AQ-12, the 5 ppm ammonia (NH₃) emission limit(s) are averaged over 1 hour at 15 percent oxygen, dry basis. MGS shall calculate and continuously record the ammonia slip concentration using the following:

$$\text{NH}_3 \text{ (ppmv)} = [a - (b \cdot c / 1,000,000)] \cdot (1,000,000 \cdot d / b) \text{ where}$$

a = ammonia injection rate (lbs/hr)/17 (lbs/lb-mole)

b = dry exhaust gas flow rate (lbs/hr)/29 (lbs/lb-mole)

c = change in measured NO_x across the SCR (ppmv dry basis)

d = correction derived by comparing the measured and calculated NH₃ slip concentrations during annual compliance testing.

For verification of the above condition of certification, the CEC requires MGS to submit to the CPM for approval all emissions and emission calculations on a quarterly basis as part of the quarterly emissions report.

NH₃ emissions are calculated via the CEMS on an hourly basis but compliance with 5 ppm limit is demonstrated from source tests. The last NH₃ compliance source test, performed in February 2019, indicated compliance with the emission limits for both CT1 and for CT2.

2.16 CONDITION OF CERTIFICATION AQ-13

As per the Condition of Certification Number AQ-13, for the purpose of determining compliance with District Rule 475, combustion contaminant emissions may exceed the concentration limit or the mass emission limit listed, but not both emission limits at the same time.

For verification of the above condition of certification, the CEC requires MGS to submit to the CPM for approval all emissions and emission calculations on a quarterly basis as part of the quarterly emissions report.

Rule 475 limits emission of combustion contaminants from electric generating equipment to no more than 5 kilograms (11 pounds) per hour or 23 milligrams per cubic meter (0.01 gr/SCF) calculated at three percent oxygen on a dry basis averaged over 15 consecutive minutes or any other averaging time specified by the Executive Officer.

The results of the last compliance source tests performed in February 2017 indicated compliance with the particulate matter emission limits for both CT1 and CT2.

2.17 CONDITION OF CERTIFICATION AQ-14

As per the Condition of Certification Number AQ-14, MGS shall not use engine cylinder lubricating oil containing the following specified compounds:

Ash greater than 0.038 weight percent

For verification of the above condition of certification, the CEC requires MGS to submit fuel purchase records to the CPM on a quarterly basis as part of the quarterly emissions report.

MGS uses CARB Ultra Low Sulfur Diesel for the diesel fire pump (D48). This is an ash less oil. As demonstration of compliance, detailed specifications of Chevron GST Oils are provided in Figure 2-3.

2.18 CONDITION OF CERTIFICATION AQ-15

As per the condition of certification number AQ-15, MGS will limit the operating time of the diesel fueled emergency backup generator and the firewater pump to no more than 199 hours each in any one year.

For verification of the above condition of certification, the CEC requires MGS to submit to the CPM for approval all testing times and results of the diesel fired emergency firewater pump in the quarterly emissions report.

As demonstration of compliance, the testing times for the diesel fired emergency firewater pump are provided in Table 2-5.

2.19 CONDITION OF CERTIFICATION NUMBER AQ-27

As per the Condition of Certification Number AQ-27, MGS shall limit the fuel usage of each turbine-duct burner pair to no more than 330 MM cubic feet per month.

For verification of the above condition of certification, the CEC requires MGS to submit to the CPM for approval all emissions and emission calculations on a quarterly basis as part of the quarterly emissions report.

As demonstration of compliance, the fuel usage for the two turbine-duct burner pairs is provided in Table 2-15.

Table 2-1

**Malburg Generating Station
Cooling Tower TDS Sampling Results
Quarter 2, 2019**

Starting	Ending	TDS (ppm)
3/31/2019	4/6/2019	4550
4/7/2019	4/13/2019	4950
4/14/2019	4/20/2019	4130
4/21/2019	4/27/2019	4640
4/28/2019	5/4/2019	4760
5/5/2019	5/11/2019	
5/12/2019	5/18/2019	4400
5/19/2019	5/25/2019	4020
5/26/2019	6/1/2019	4020
6/2/2019	6/8/2019	4040
6/9/2019	6/15/2019	4060
6/16/2019	6/22/2019	4520
6/23/2019	6/29/2019	3960

*

*Outage

Table 2-2

**Malburg Generating Station
Cooling Tower Daily PM10 Emissions During Apr. 2019**

PM₁₀ = A x B x C x D

PM₁₀ Limit is 6.2 lbs/day

A = Circulation Rate

C = Drift Factor

B = TDS

D = Correction Factor

Date	Circulation Rate (gal/day)	TDS (ppm)	PM₁₀ (lbs/day)
1	36,339,840	4550	1.38
2	36,339,840	4550	1.38
3	36,339,840	4550	1.38
4	36,339,840	4550	1.38
5	36,339,840	4550	1.38
6	36,339,840	4550	1.38
7	36,339,840	4950	1.50
8	36,339,840	4950	1.50
9	36,339,840	4950	1.50
10	36,339,840	4950	1.50
11	36,339,840	4950	1.50
12	36,339,840	4950	1.50
13	36,339,840	4950	1.50
14	36,339,840	4130	1.25
15	36,339,840	4130	1.25
16	36,339,840	4130	1.25

Date	Circulation Rate (gal/day)	TDS (ppm)	PM₁₀ (lbs/day)
17	36,339,840	4130	1.25
18	36,339,840	4130	1.25
19	36,339,840	4130	1.25
20	36,339,840	4130	1.25
21	36,339,840	4640	1.41
22	36,339,840	4640	1.41
23	36,339,840	4640	1.41
24	36,339,840	4640	1.41
25	36,339,840	4640	1.41
26	36,339,840	4640	1.41
27	36,339,840	4640	1.41
28	36,339,840	4760	1.44
29	36,339,840	4760	1.44
30	36,339,840	4760	1.44

Table 2-3

Malburg Generating Station Cooling Tower Daily PM10 Emissions During May. 2019							
PM₁₀ = A x B x C x D PM₁₀ Limit is 6.2 lbs/day				A = Circulation Rate C = Drift Factor		B = TDS D = Correction Factor	
Date	Circulation Rate (gal/day)	TDS (ppm)	PM ₁₀ (lbs/day)	Date	Circulation Rate (gal/day)	TDS (ppm)	PM ₁₀ (lbs/day)
1	36,339,840	4760	1.44	17	36,339,840	4400	1.33
2	36,339,840	4760	1.44	18	36,339,840	4400	1.33
3	36,339,840	4760	1.44	19	36,339,840	4020	1.22
4	36,339,840	4760	1.44	20	36,339,840	4020	1.22
5	36,339,840	0	0.00	21	36,339,840	4020	1.22
6	36,339,840	0	0.00	22	36,339,840	4020	1.22
7	36,339,840	0	0.00	23	36,339,840	4020	1.22
8	36,339,840	0	0.00	24	36,339,840	4020	1.22
9	36,339,840	0	0.00	25	36,339,840	4020	1.22
10	36,339,840	0	0.00	26	36,339,840	4020	1.22
11	36,339,840	0	0.00	27	36,339,840	4020	1.22
12	36,339,840	4400	1.33	28	36,339,840	4020	1.22
13	36,339,840	4400	1.33	29	36,339,840	4020	1.22
14	36,339,840	4400	1.33	30	36,339,840	4020	1.22
15	36,339,840	4400	1.33	31	36,339,840	4020	1.22
16	36,339,840	4400	1.33				

Table 2-4

Malburg Generating Station Cooling Tower Daily PM10 Emissions During Jun. 2019							
PM₁₀ = A x B x C x D PM₁₀ Limit is 6.2 lbs/day				A = Circulation Rate C = Drift Factor		B = TDS D = Correction Factor	
Date	Circulation Rate (gal/day)	TDS (ppm)	PM ₁₀ (lbs/day)	Date	Circulation Rate (gal/day)	TDS (ppm)	PM ₁₀ (lbs/day)
1	36,339,840	4020	1.22	17	36,339,840	4520	1.37
2	36,339,840	4040	1.22	18	36,339,840	4520	1.37
3	36,339,840	4040	1.22	19	36,339,840	4520	1.37
4	36,339,840	4040	1.22	20	36,339,840	4520	1.37
5	36,339,840	4040	1.22	21	36,339,840	4520	1.37
6	36,339,840	4040	1.22	22	36,339,840	4520	1.37
7	36,339,840	4040	1.22	23	36,339,840	3960	1.20
8	36,339,840	4040	1.22	24	36,339,840	3960	1.20
9	36,339,840	4060	1.23	25	36,339,840	3960	1.20
10	36,339,840	4060	1.23	26	36,339,840	3960	1.20
11	36,339,840	4060	1.23	27	36,339,840	3960	1.20
12	36,339,840	4060	1.23	28	36,339,840	3960	1.20
13	36,339,840	4060	1.23	29	36,339,840	3960	1.20
14	36,339,840	4060	1.23	30	36,339,840	3960	1.20
15	36,339,840	4060	1.23				
16	36,339,840	4520	1.37				

Table 2-5

**Heorot Power Management
Malburg Generating Station
Diesel Fuel Fired Emergency Firewater Pump Testing Times
During Quarter 2, 2019**

Date	Time	Main / Test Emerg.	Hours of Operation	Fuel Used (gals)	Initials
Apr. 09, 2019	23:26	Testing	0.5	4.5	STFO
Apr. 14, 2019	23:19	Testing	0.5	4.5	ARFO
Apr. 21, 2019	23:15	Testing	0.5	4.5	VFFO
Apr. 28, 2019	23:22	Testing	0.5	4.5	SCTFO
May. 15, 2019	23:30	Testing	0.5	4.5	STFO
May. 19, 2019	23:23	Testing	0.6	5.4	JAFO
May. 26, 2019	23:22	Testing	0.5	4.5	VFFO
Jun. 03, 2019	23:23	Testing	0.5	4.5	SCTFO
Jun. 10, 2019	23:23	Testing	0.6	5.4	STFO
Jun. 20, 2019	15:24	Trip/DNR	0.0	0.0	0

Note: Event 'DNR' - Did Not Run

Table 2-6

AQ-C10 Emission Limits, lbs/hr				
Pollutant	Gas Turbines (2)	Cooling Tower	Firewater Pump	Facility Total
CO	140	--	0.59	140
NOx	55	--	1.73	55
PM ₁₀	7.78	0.26	0.08	8.12
VOC	3.3	--	0.05	3.35
SOx	0.3	--	0.002	0.3
Ammonia	7.6	--	--	7.6

Table 2-7

AQ-C10 Emission Limits, lbs/day				
Pollutant	Gas Turbines (2)	Cooling Tower	Firewater Pump	Facility Total
CO	245	--	0.59	245
NOx	230	--	1.73	230
PM ₁₀	158	6.2	0.08	164.28
VOC	36	--	0.05	36.05
SOx	6	--	0.002	6
Ammonia	182.4	--	--	182.4

Table 2-8

**Malburg Generating Station
Maximum Hourly Emissions
During Quarter 2, 2019**

Contaminant	Gas Turbines (2)		Cooling Tower		Firewater Pump		Facility ^a
	Date & Hour	Emission	Date & Hour	Emission	Date & Hour	Emission	Total
CO lbs	5/11/19 7:00	71.00	N/A	N/A	6/10/19 23:23	0.092	71.09
NOx lbs	6/9/19 16:00	34.10	N/A	N/A	6/10/19 23:23	0.918	35.02
PM lbs	4/28/19 18:00	7.40	4/7/2019	0.06	6/10/19 23:23	0.022	7.48
VOC lbs	4/25/19 17:00	1.63	N/A	N/A	6/10/19 23:23	0.022	1.65
SO2 lbs	4/1/19 18:00	0.28	N/A	N/A	6/10/19 23:23	0.002	0.28
NH3 lbs	5/28/19 17:00	2.63	N/A	N/A	6/10/19 23:23		2.63

a: Although the maximum gas turbines, cooling tower, and firewater pump emissions did not occur during the same hour, the facility total equals the sum of each device's maximum hourly emissions.

Table 2-9

**Malburg Generating Station
Maximum Daily Emissions
During Quarter 2, 2019**

Contaminant	Gas Turbines (2)		Cooling Tower		Firewater Pump		Facility ^a
	Date	Emission	Date & Hour	Emission	Date & Hour	Emission	Total
CO lbs	5/11/2019	134.28	N/A	N/A	6/10/19 23:23	0.092	134.37
NOx lbs	6/17/2019	142.95	N/A	N/A	6/10/19 23:23	0.918	143.87
PM lbs	6/11/2019	132.69	4/7/2019	1.50	6/10/19 23:23	0.022	134.21
VOC lbs	6/11/2019	29.26	N/A	N/A	6/10/19 23:23	0.022	29.28
SO2 lbs	6/11/2019	5.00	N/A	N/A	6/10/19 23:23	0.002	5.00
NH3 lbs	4/3/2019	75.77	N/A	N/A	6/10/19 23:23		75.77

a: Although the maximum gas turbines, cooling tower, and firewater pump emissions did not occur during the same hour, the facility total equals the sum of each device's maximum hourly emissions.

Table 2-11

Malburg Generating Station Total Monthly Emissions Apr-2019	
Contaminant	Gas Turbines (2)
CO lbs	956
PM10 lbs	3,002
PM2.5 lbs	3,002
VOC lbs	662
SOx lbs	113

Table 2-12

Malburg Generating Station Total Monthly Emissions May-2019	
Contaminant	Gas Turbines (2)
CO lbs	924
PM10 lbs	2,024
PM2.5 lbs	2,024
VOC lbs	446
SOx lbs	77

Table 2-13

Malburg Generating Station Total Monthly Emissions Jun-2019	
Contaminant	Gas Turbines (2)
CO lbs	1,101
PM10 lbs	2,240
PM2.5 lbs	2,240
VOC lbs	543
SOx lbs	97

Table 2-14

Malburg Generating Station
Combustion Turbines Startup and Shutdown Events
During Quarter 2, 2019

CT1

Date	Event Type	Event Start	Event End	Duration (hrs:min)
04/07/2019	Warm start up	19:46	20:53	1:07
04/08/2019	Warm start up	06:57	07:52	0:55
04/08/2019	Warm start up	18:23	19:20	0:57
05/04/2019	Warm start up	17:37	18:51	1:14
05/11/2019	Cold Start up	07:53	09:39	1:46
05/12/2019	Warm start up	17:28	18:47	1:19
05/28/2019	Cold Start up	19:29	20:47	1:18
06/02/2019	Warm start up	20:30	21:53	1:23
06/08/2019	Warm start up	18:01	19:17	1:16
06/09/2019	Warm start up	18:33	19:47	1:14
06/15/2019	Warm start up	19:04	20:16	1:12
06/17/2019	Warm start up	04:23	05:34	1:11
06/23/2019	Warm start up	15:04	16:22	1:18
04/05/2019	Shut Down	22:27	22:29	00:02
04/07/2019	Shut Down	22:09	22:12	00:03
04/08/2019	Shut Down	09:12	09:20	00:08
05/04/2019	Shut Down	00:01	00:06	00:05
05/04/2019	Shut Down	23:41	23:50	00:09
05/11/2019	Shut Down	19:10	19:18	00:08
05/24/2019	Shut Down	23:15	23:18	00:03
06/01/2019	Shut Down	00:12	00:20	00:08
06/08/2019	Shut Down	00:15	00:18	00:03
06/08/2019	Shut Down	22:21	22:27	00:06
06/14/2015	Shut Down	22:15	22:15	00:00
06/16/2019	Shut Down	00:00	00:01	00:01
06/23/2019	Shut Down	01:18	01:19	00:01

CT2

04/04/2019	Warm start up	09:27	10:18	00:51
04/07/2019	Warm start up	17:49	19:16	01:27
04/08/2019	Warm start up	05:28	06:28	01:00
04/08/2019	Warm start up	16:55	17:55	01:00
05/04/2019	Warm start up w/trip	15:33	16:49	01:16
05/11/2019	Cold Start up	17:25	18:59	01:34
05/12/2019	Warm start up	19:19	20:37	01:18
05/28/2019	Cold Start Up w/trip	16:58	18:33	01:35
06/02/2019	Warm start up	18:28	19:51	01:23
06/08/2019	Warm start up	20:38	21:53	01:15
06/09/2019	Warm start up	16:52	18:09	01:17
06/15/2019	Warm start up	16:58	18:19	01:21
06/17/2019	Warm start up	02:26	03:51	01:25
06/23/2019	Warm start up	16:49	17:56	01:07
04/04/2019	Trip	07:55		:00
04/05/2019	Shut Down	22:27	22:29	00:02
04/07/2019	Shut Down	22:09	22:12	00:03
04/08/2019	Shut Down	09:12	09:20	00:08
05/04/2019	Shut Down	00:01	00:06	00:05
05/04/2019	Shut Down	23:41	23:49	00:08
05/11/2019	Shut Down	22:36	22:41	00:05
05/24/2019	Shut Down	23:15	23:18	00:03
06/01/2019	Shut Down	00:12	00:20	00:08
06/08/2019	Shut Down	00:15	00:18	00:03
06/08/2019	Shut Down	22:21	22:27	00:06
06/14/2019	Shut Down	22:15	22:15	00:00
06/16/2019	Shut Down	00:00	00:01	00:01
06/23/2019	Shut Down	01:18	01:19	00:01

*Trip

**Trip and restart

Table 2-15

Malburg Generating Station Combustion Turbines and Duct Burner Gas Usage During Quarter 2,2019		
Month	CT-1 / DB-1 Gas Usage (mmscf)	CT-2 / DB-2 Gas Usage (mmscf)
Apr-19	201.47	204.38
May-19	136.67	136.93
Jun-19	171.59	174.63

Figure 2-1
Cooling Tower Blowdown Reports



781 East Washington Blvd., Los Angeles, CA 90021
[213] 745-5312 FAX [213] 745-6372

April 08, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1904026
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on April 02, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.


Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
[213] 745-5312 FAX [213] 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart

Phone: (323) 476-3626 FAX: (323) 476-3640

File #: 74548

Report Date: 04/08/19

Submitted: 04/02/19

PLS Report No.: 1904026

Project: Malburg Generating Station Weekly

Sample ID: Cooling Tower Blowdown Water (1904026-01) Sampled: 04/02/19 09:15 Received: 04/02/19 09:15

Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch
Total Dissolved Solids	4550		1	mg/L	5.0	SM 2540C	04/03/19	04/04/19	aa	BD90519

Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC	Limit	RPD	Limit	Qualifier
Batch BD90519 --										
Blank										
Prepared: 04/03/19 Analyzed: 04/04/19										
Total Dissolved Solids	ND	5.0	mg/L							
LCS										
Prepared: 04/03/19 Analyzed: 04/04/19										
Total Dissolved Solids	356	5.0	mg/L	356.0		100	80-120			
Duplicate										
Source: 1904026-01 Prepared: 04/03/19 Analyzed: 04/04/19										
Total Dissolved Solids	4490	5.0	mg/L	4550		1.26	5			

Notes and Definitions

NA Not Applicable
ND Analyte NOT DETECTED at or above the detection limit
NR Not Reported
MDL Method Detection Limit
PQL Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138

Authorized Signature(s)



CHAIN OF CUSTODY AND ANALYSIS REQUEST

781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

DATE: 4-29 PAGE 1 OF 1
LOG BOOK NO. _____ FILE NO. _____ LAB NO. 1904020

CLIENT NAME: <u>CEM</u>				Project Name/No: <u>Malibu Concreting Station Weekly</u>				P.O. NO.				AIRBILL NO: _____							
ADDRESS:								ANALYSES REQUESTED:								COOLER TEMP: <u>16°C</u>			
PROJECT MANAGER: <u>Tom Benhart</u>				PHONE NO:				FAX NO:				PRESERVATIVE:							
SAMPLER NAME: <u>Tom Benhart</u> (Printed) <u>[Signature]</u> (Signature)																REMARKS:			
TAT (Analytical Turn Around Time): 0 = Same Day; 1 = 1 Day; 2 = 2 Days; 3 = 3 Days; N = Normal (5-7 Working Days)																			
CONTAINER TYPES: B = Brass, E = Encore, G = Glass, P = Plastic, V = VOA Vial, O = Other:																			
UST Project: Y N - Global ID# _____																			
SAMPLE NO.	DATE SAMPLED	TIME SAMPLED	SAMPLE DESCRIPTION	MATRIX				TAT	CONTAINER									SAMPLE CONDITION/CONTAINER /COMMENTS:	
				WATER	SOIL	SLUDGE	OTHER		#	TYPE									
1	<u>4-29</u>	<u>0915</u>	<u>Loaing Tower Blower</u>	<u>So</u>				<u>N</u>		<u>P</u>									
2																			
3																			
4																			
5																			
6																			
7																			
8																			
9																			
10																			

Relinquished By: (Signature and Printed Name) <u>[Signature]</u>		Received By: (Signature and Printed Name) <u>[Signature]</u>		Date: <u>4-29</u> Time: <u>1225</u>		SAMPLE DISPOSITION: 1. Samples returned to client? YES NO 2. Samples will not be stored over 30 days, unless additional storage time is requested. 3. Storage time requested: _____ days By _____ Date _____	
Relinquished By: (Signature and Printed Name)		Received By: (Signature and Printed Name)		Date: _____ Time: _____			
Relinquished By: (Signature and Printed Name)		Received By: (Signature and Printed Name)		Date: _____ Time: _____			

SPECIAL INSTRUCTIONS:

PRESERVATIVE: 1-HNO₃, 2-H₂SO₄, 3-HCL, 4-Zinc Acetate, 5-NaOH, 6-NH₄ Buffer, 7-Other



781 East Washington Blvd., Los Angeles, CA 90021
[213] 745-5312 FAX [213] 745-6372

April 15, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1904090
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on April 09, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.


Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart

Phone: (323) 476-3626 FAX: (323) 476-3640

File #: 74548

Report Date: 04/15/19

Submitted: 04/09/19

PLS Report No.: 1904090

Project: Malburg Generating Station Weekly

Sample ID: Cooling Tower Blowdown Water (1904090-01) Sampled: 04/09/19 09:00 Received: 04/09/19 09:00										
Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch
Total Dissolved Solids	4950		1	mg/L	5.0	SM 2540C	04/10/19	04/11/19	aa	BD91115

Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Qualifier
Batch BD91115 -										
Blank										
Prepared: 04/10/19 Analyzed: 04/11/19										
Total Dissolved Solids	ND	5.0	mg/L							
LCS										
Prepared: 04/10/19 Analyzed: 04/11/19										
Total Dissolved Solids	337	5.0	mg/L	356.0		94.7	80-120			
Duplicate Source: 1904099-08 Prepared: 04/10/19 Analyzed: 04/11/19										
Total Dissolved Solids	900	5.0	mg/L		903			0.366	5	
Duplicate Source: 1904090-01 Prepared: 04/10/19 Analyzed: 04/11/19										
Total Dissolved Solids	4830	5.0	mg/L		4950			2.52	5	

Notes and Definitions

NA Not Applicable
ND Analyte NOT DETECTED at or above the detection limit
NR Not Reported
MDL Method Detection Limit
PQL Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138

Authorized Signature(s)


POSITIVE
LAB SERVICE
CHAIN OF CUSTODY AND ANALYSIS REQUEST

 781 East Washington Blvd., Los Angeles, CA 90021
 (213) 745-5312 FAX (213) 745-6372

 DATE: 4/9/99 PAGE 1 OF 1

 LOG BOOK NO. _____ FILE NO. _____ LAB NO. 1984090

CLIENT NAME: <u>Com</u>				Project Name/No. <u>Monthly Groundwater Sampling Weekly</u>				P.O. NO. _____				AIRBILL NO: _____							
ADDRESS: _____								ANALYSES REQUESTED: _____								COOLER TEMP: <u>1.8°C</u>			
PROJECT MANAGER: <u>Tom Barnett</u>				PHONE NO: _____				FAX NO: _____				PRESERVATIVE: _____							
SAMPLER NAME: <u>Jon Bore</u> (Printed) <u>[Signature]</u> (Signature)																REMARKS: _____			
TAT (Analytical Turn Around Time): 0 = Same Day; 1 = 1 Day; 2 = 2 Days; 3 = 3 Days; N = Normal (5-7 Working Days)																			
CONTAINER TYPES: B = Brass, E = Encore, G = Glass, P = Plastic, V = VOA Vial, O = Other:																			
UST Project: Y N - Global ID# _____																			
SAMPLE NO.	DATE SAMPLED	TIME SAMPLED	SAMPLE DESCRIPTION	MATRIX				TAT	CONTAINER		SAMPLE CONDITION/CONTAINER /COMMENTS:								
				WATER	SOIL	SLUDGE	OTHER		#	TYPE									
1	<u>4/9/99</u>	<u>0900</u>	<u>Leaking tank at Bunker</u>	<u>X</u>				<u>2</u>		<u>P</u>	<u>TS</u>								
2																			
3																			
4																			
5																			
6																			
7																			
8																			
9																			
10																			

Relinquished By: (Signature and Printed Name) <u>[Signature]</u>	Received By: (Signature and Printed Name) <u>[Signature]</u>	Date: <u>4/9/99</u>	Time: <u>1050</u>	SAMPLE DISPOSITION: 1. Samples returned to client? YES NO 2. Samples will not be stored over 30 days, unless additional storage time is requested. 3. Storage time requested: _____ days By _____ Date _____
Relinquished By: (Signature and Printed Name)	Received By: (Signature and Printed Name)	Date:	Time:	
Relinquished By: (Signature and Printed Name)	Received By: (Signature and Printed Name)	Date:	Time:	

SPECIAL INSTRUCTIONS: _____

 PRESERVATIVE: 1-HNO₃, 2-H₂SO₄, 3-HCL, 4-Zinc Acetate, 5-NaOH, 6-NH₄ Buffer, 7-Other



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

April 22, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1904168
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on April 16, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.


Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart

Phone: (323) 476-3626 FAX: (323) 476-3640

File #: 74548

Report Date: 04/22/19

Submitted: 04/16/19

PLS Report No.: 1904168

Project: Malburg Generating Station Weekly

Sample ID: Cooling Tower Blowdown Water (1904168-01) Sampled: 04/16/19 10:45 Received: 04/16/19 10:45

Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch
Total Dissolved Solids	4130		1	mg/L	5.0	SM 2540C	04/16/19	04/17/19	aa	BD91737

Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC	Limits	RPD	Limit	Qualifier
---------	--------	-----	-------	-------------	---------------	------	--------	-----	-------	-----------

Batch BD91737 --

Blank		Prepared: 04/16/19 Analyzed: 04/17/19								
Total Dissolved Solids	ND	5.0	mg/L							
LCS		Prepared: 04/16/19 Analyzed: 04/17/19								
Total Dissolved Solids	331	5.0	mg/L	356.0		93.0	80-120			
Duplicate		Source: 1904124-01 Prepared: 04/16/19 Analyzed: 04/17/19								
Total Dissolved Solids	4490	5.0	mg/L		4500			0.178	5	
Duplicate		Source: 1904126-07 Prepared: 04/16/19 Analyzed: 04/17/19								
Total Dissolved Solids	740	5.0	mg/L		740			0.00	5	

Notes and Definitions

NA	Not Applicable
ND	Analyte NOT DETECTED at or above the detection limit
NR	Not Reported
MDL	Method Detection Limit
PQL	Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138

Authorized Signature(s)



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

April 30, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1904212
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on April 23, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.

A handwritten signature in blue ink, appearing to read "D. Sanchez", is written over a horizontal line. Below the line, the text "Project Manager" is printed.

Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart

Phone: (323) 476-3626 FAX:(323) 476-3640

Project: Malburg Generating Station Weekly

File #:74548

Report Date: 04/30/19

Submitted: 04/23/19

PLS Report No.: 1904212

Sample ID: Cooling Tower Blowdown Water (1904212-01) Sampled: 04/23/19 08:15 Received: 04/23/19 08:15										
Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch
Total Dissolved Solids	4640		1	mg/L	5.0	SM 2540C	04/25/19	04/26/19	aa	BD93015

Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC Limits	RPD Limit	Qualifier
Batch BD93015 --								
Blank Prepared: 04/25/19 Analyzed: 04/26/19								
Total Dissolved Solids	ND	5.0	mg/L					
LCS Prepared: 04/25/19 Analyzed: 04/26/19								
Total Dissolved Solids	354	5.0	mg/L	356.0	99.4	80-120		
Duplicate Source: 1904212-01 Prepared: 04/25/19 Analyzed: 04/26/19								
Total Dissolved Solids	4630	5.0	mg/L	4640	0.287	5		

Notes and Definitions

NA Not Applicable
ND Analyte NOT DETECTED at or above the detection limit
NR Not Reported
MDL Method Detection Limit
PQL Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138


Authorized Signature(s)

781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

DATE: 4/27/9 PAGE 1 OF 1
FILE NO. LAB NO. 1004212

CLIENT NAME: FM

Project Name/No. Meikun Gendang Station

P.O. NO.

AIRBILL NO: _____

ADDRESS:

ANALYSES REQUESTED:

COOLER TEMP: 1.1 °C

PROJECT MANAGER: Tom Barnhart

PHONE NO:

FAX NO:

SAMPLER NAME: Tom Bore

(Printed)

(Signature)

TAT (Analytical Turn Around Time): 0 = Same Day; 1 = 1 Day; 2 = 2 Days; 3 = 3 Days; N = Normal (5-7 Working Days)

CONTAINER TYPES: B = Brass, E = Encore, G = Glass, P = Plastic, V = VOA Vial, O = Other:

UST Project: Y N - Global ID#

SAMPLE NO.	DATE SAMPLED	TIME SAMPLED	SAMPLE DESCRIPTION	MATRIX				TAT	CONTAINER	
				WATER	SOIL	SLUDGE	OTHER		#	TYPE

**SAMPLE CONDITION/
CONTAINER /COMMENTS:**

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

Relinquished By: ~~(Signature)~~ and Printed Name)

Received By: (Signature and Printed Name)

Date: 23/9

Time: 145

Relinquished By: (Signature and Printed Name)

Received By: (Signature and Printed Name)

Date:

Time:

Relinquished By: (Signature and Printed Name)

Received By: (Signature and Printed Name)

Date:

Time:

SPECIAL INSTRUCTIONS:

SAMPLE DISPOSITION:

1. Samples returned to client?	YES	NO
--------------------------------	-----	----

2. Samples will not be stored over 30 days, unless additional storage time is requested.

3. Storage time requested: _____ days

By _____ Date _____

PRESERVATIVE: 1-HNO₃, 2-H₂SO₄, 3-HCL, 4-Zinc Acetate, 5-NaOH, 6-NH₄ Buffer, 7-Other

LAB COPY



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

May 06, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1904248
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on April 29, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.



Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart

Phone: (323) 476-3626 FAX: (323) 476-3640

File #: 74548
Report Date: 05/06/19
Submitted: 04/29/19
PLS Report No.: 1904248

Project: Malburg Generating Station Weekly

Sample ID: Cooling Tower Blowdown Water (1904248-01) Sampled: 04/29/19 09:15 Received: 04/29/19 09:15

Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch
Total Dissolved Solids	4760		1	mg/L	5.0	SM 2540C	05/03/19	05/03/19	aa	BE90614

Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Qualifier
Batch BE90614 - -										
Blank										
Prepared & Analyzed: 05/03/19										
Total Dissolved Solids	ND	5.0	mg/L							
LCS										
Prepared & Analyzed: 05/03/19										
Total Dissolved Solids	334	5.0	mg/L	356.0		93.8	80-120			
Duplicate										
Source: 1904248-01 Prepared & Analyzed: 05/03/19										
Total Dissolved Solids	4630	5.0	mg/L		4760			2.80	5	

Notes and Definitions

NA Not Applicable
ND Analyte NOT DETECTED at or above the detection limit
NR Not Reported
MDL Method Detection Limit
PQL Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138

Authorized Signature(s)



CHAIN OF CUSTODY AND ANALYSIS REQUEST

 781 East Washington Blvd., Los Angeles, CA 90021
 (213) 745-5312 FAX (213) 745-6372

DATE: 4/29/19 PAGE 1 OF 1

LOG BOOK NO. FILE NO. LAB NO. 1904248

CLIENT NAME: LEM				Project Name/No. Malibu Generating Station Weekly				P.O. NO.				AIRBILL NO:																																																																																																											
ADDRESS:								ANALYSES REQUESTED:								COOLER TEMP: 2.7 °C																																																																																																							
PROJECT MANAGER: Tom Barnhart				PHONE NO:				FAX NO:				PRESERVATIVE:																																																																																																											
SAMPLER NAME: Jon Bane (Printed) (Signature)								<table border="1" style="width:100%; height: 150px;"> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>																																																																																																												REMARKS:			
TAT (Analytical Turn Around Time): 0 = Same Day; 1 = 1 Day; 2 = 2 Days; 3 = 3 Days; N = Normal (5-7 Working Days)																																																																																																																							
CONTAINER TYPES: B = Brass, E = Encore, G = Glass, P = Plastic, V = VOA Vial, O = Other:																																																																																																																							
UST Project: Y N - Global ID#																																																																																																																							
SAMPLE NO.	DATE SAMPLED	TIME SAMPLED	SAMPLE DESCRIPTION	MATRIX				TAT	CONTAINER										SAMPLE CONDITION/CONTAINER /COMMENTS:																																																																																																				
				WATER	SOIL	SLUDGE	OTHER		#	TYPE																																																																																																													
1	4/29/19	0915	Cooling Tower Blower	S				21	P																																																																																																														
2																																																																																																																							
3																																																																																																																							
4																																																																																																																							
5																																																																																																																							
6																																																																																																																							
7																																																																																																																							
8																																																																																																																							
9																																																																																																																							
10																																																																																																																							

Relinquished By: (Signature and Printed Name)		Received By: (Signature and Printed Name) J. Gutierrez		Date: 4/29/19	Time: 1215
Relinquished By: (Signature and Printed Name)		Received By: (Signature and Printed Name)		Date:	Time:
Relinquished By: (Signature and Printed Name)		Received By: (Signature and Printed Name)		Date:	Time:

SPECIAL INSTRUCTIONS:

SAMPLE DISPOSITION:
 1. Samples returned to client? YES NO
 2. Samples will not be stored over 30 days, unless additional storage time is requested.
 3. Storage time requested: _____ days
 By _____ Date _____

PRESERVATIVE: 1-HNO₃, 2-H₂SO₄, 3-HCL, 4-Zinc Acetate, 5-NaOH, 6-NH₄ Buffer, 7-Other



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

May 21, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1905133
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on May 14, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.


Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart

Phone: (323) 476-3626 FAX: (323) 476-3640

File #: 74548

Report Date: 05/21/19

Submitted: 05/14/19

PLS Report No.: 1905133

Project: Malburg Generating Station Weekly

Sample ID: Cooling Tower Blowdown Water (1905133-01) Sampled: 05/14/19 07:25 Received: 05/14/19 07:25

Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch
Total Dissolved Solids	4400		1	mg/L	5.0	SM 2540C	05/20/19	05/21/19	cg	BE92130

Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC	Limit	RPD	Limit	Qualifier
---------	--------	-----	-------	-------------	---------------	------	-------	-----	-------	-----------

Batch BE92130 --

Blank		Prepared: 05/20/19 Analyzed: 05/21/19								
Total Dissolved Solids	ND	5.0	mg/L							
LCS		Prepared: 05/20/19 Analyzed: 05/21/19								
Total Dissolved Solids	353	5.0	mg/L	356.0		99.2	80-120			
Duplicate		Source: 1905133-01 Prepared: 05/20/19 Analyzed: 05/21/19								
Total Dissolved Solids	4400	5.0	mg/L	4400		0.114	5			

Notes and Definitions

NA	Not Applicable
ND	Analyte NOT DETECTED at or above the detection limit
NR	Not Reported
MDL	Method Detection Limit
PQL	Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138

Authorized Signature(s)



CHAIN OF CUSTODY AND ANALYSIS REQUEST

781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

DATE: 5/14/99 PAGE 1 OF 1
LOG BOOK NO. FILE NO. LAB NO. 1905133

CLIENT NAME: <u>Com</u>			Project Name/No. <u>Malibu Generating Station Weekly</u>			P.O. NO.			AIRBILL NO:																																																		
ADDRESS:						ANALYSES REQUESTED:			COOLER TEMP: <u>1.4°C</u>																																																		
PROJECT MANAGER: <u>Tom Bernhart</u>			PHONE NO:			FAX NO:			PRESERVATIVE:																																																		
SAMPLER NAME: <u>Tom Bernhart</u> (Printed) <u>[Signature]</u> (Signature)						<table border="1" style="width:100%; height: 150px;"> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>																																																			REMARKS:		
TAT (Analytical Turn Around Time): 0 = Same Day; 1 = 1 Day; 2 = 2 Days; 3 = 3 Days; N = Normal (5-7 Working Days)																																																											
CONTAINER TYPES: B = Brass, E = Encore, G = Glass, P = Plastic, V = VOA Vial, O = Other:																																																											
UST Project: Y N - Global ID# _____																																																											
SAMPLE NO.	DATE SAMPLED	TIME SAMPLED	SAMPLE DESCRIPTION	MATRIX				TAT	CONTAINER		SAMPLE CONDITION/CONTAINER /COMMENTS:																																																
				WATER	SOIL	SLUDGE	OTHER		#	TYPE																																																	
1	5/14/99	0725	Looking Tower Blowdown	<u>X</u>				N	1	P	<u>2</u>																																																
2																																																											
3																																																											
4																																																											
5																																																											
6																																																											
7																																																											
8																																																											
9																																																											
10																																																											

Relinquished By: (Signature and Printed Name) <u>[Signature]</u>	Received By: (Signature and Printed Name) <u>[Signature]</u>	Date: <u>5/14/99</u>	Time: <u>0800</u>	SAMPLE DISPOSITION: 1. Samples returned to client? YES NO 2. Samples will not be stored over 30 days, unless additional storage time is requested. 3. Storage time requested: _____ days By _____ Date _____
Relinquished By: (Signature and Printed Name)	Received By: (Signature and Printed Name)	Date:	Time:	
Relinquished By: (Signature and Printed Name)	Received By: (Signature and Printed Name)	Date:	Time:	

SPECIAL INSTRUCTIONS:

PRESERVATIVE: 1-HNO₃, 2-H₂SO₄, 3-HCL, 4-Zinc Acetate, 5-NaOH, 6-NH₄ Buffer, 7-Other



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

May 30, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1905277
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on May 22, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.



Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
[213] 745-5312 FAX [213] 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart

Phone: (323) 476-3626 FAX: (323) 476-3640

File #: 74548

Report Date: 05/30/19

Submitted: 05/22/19

PLS Report No.: 1905277

Project: Malburg Generating Station Weekly

Sample ID: Cooling Tower Blowdown Water (1905277-01) Sampled: 05/22/19 08:45 Received: 05/22/19 08:45											
Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch	
Total Dissolved Solids	4020	R1	1	mg/L	5.0	SM 2540C	05/29/19	05/30/19	cg	BE93014	

Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Qualifier
Batch BE93014 - -										
Blank Prepared: 05/29/19 Analyzed: 05/30/19										
Total Dissolved Solids	ND	5.0	mg/L							
LCS Prepared: 05/29/19 Analyzed: 05/30/19										
Total Dissolved Solids	336	5.0	mg/L	356.0		94.4	80-120			
Duplicate Source: 1905324-01 Prepared: 05/29/19 Analyzed: 05/30/19										
Total Dissolved Solids	3990	5.0	mg/L		4020			0.549	5	

Notes and Definitions

R1 Sample Analyzed Past Holding Time.
NA Not Applicable
ND Analyte NOT DETECTED at or above the detection limit
NR Not Reported
MDL Method Detection Limit
PQL Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138

Authorized Signature(s)



CHAIN OF CUSTODY AND ANALYSIS REQUEST

781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

DATE: 5-22-79 PAGE 1 OF 1

LOG BOOK NO. _____ FILE NO. _____ LAB NO. 1005277

CLIENT NAME: CEM Project Name/No. melburg Generating Station P.O. NO. _____ AIRBILL NO: _____

ADDRESS: _____ ANALYSES REQUESTED: _____ COOLER TEMP: 1.3 °C

PROJECT MANAGER: Tom Bernhart PHONE NO: _____ FAX NO: _____ PRESERVATIVE: /

SAMPLER NAME: Tom Bernhart (Printed) [Signature] (Signature) REMARKS: _____

TAT (Analytical Turn Around Time): 0 = Same Day; 1 = 1 Day; 2 = 2 Days; 3 = 3 Days; N = Normal (5-7 Working Days)

CONTAINER TYPES: B = Brass, E = Encore, G = Glass, P = Plastic, V = VOA Vial, O = Other:

UST Project: Y N - Global ID# _____

SAMPLE NO.	DATE SAMPLED	TIME SAMPLED	SAMPLE DESCRIPTION	MATRIX				TAT	CONTAINER		SAMPLE CONDITION/CONTAINER /COMMENTS:
				WATER	SOIL	SLUDGE	OTHER		#	TYPE	
1	5-22-79	0845	Cooling Tower Blower	L				N	1	P	
2											
3											
4											
5											
6											
7											
8											
9											
10											

Relinquished By: (Signature and Printed Name)	Received By: (Signature and Printed Name)	Date: <u>5-22-79</u>	Time: <u>1020</u>	SAMPLE DISPOSITION: 1. Samples returned to client? YES NO 2. Samples will not be stored over 30 days, unless additional storage time is requested. 3. Storage time requested: _____ days By _____ Date _____
Relinquished By: (Signature and Printed Name)	Received By: (Signature and Printed Name)	Date: _____	Time: _____	
Relinquished By: (Signature and Printed Name)	Received By: (Signature and Printed Name)	Date: _____	Time: _____	

SPECIAL INSTRUCTIONS:

PRESERVATIVE: 1-HNO₃, 2-H₂SO₄, 3-HCL, 4-Zinc Acetate, 5-NaOH, 6-NH₄ Buffer, 7-Other



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

June 04, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1905324
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on May 28, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.

A handwritten signature in black ink, appearing to read "John Schmidt", is written over a horizontal line.

Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart

Phone: (323) 476-3626 FAX: (323) 476-3640

File #: 74548

Report Date: 06/04/19

Submitted: 05/28/19

PLS Report No.: 1905324

Project: Malburg Generating Station Weekly

Sample ID: Cooling Tower Blowdown Water (1905324-01) Sampled: 05/28/19 11:10 Received: 05/28/19 11:10

Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch
Total Dissolved Solids	4020		1	mg/L	5.0	- SM 2540C	05/29/19	05/30/19	cg	BE93014


Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC	Limit	RPD	Limit	Qualifier
Batch BE93014 --										
Blank Prepared: 05/29/19 Analyzed: 05/30/19										
Total Dissolved Solids	ND	5.0	mg/L							
LCS Prepared: 05/29/19 Analyzed: 05/30/19										
Total Dissolved Solids	336	5.0	mg/L	356.0		94.4	80-120			
Duplicate Source: 1905324-01 Prepared: 05/29/19 Analyzed: 05/30/19										
Total Dissolved Solids	3990	5.0	mg/L		4020			0.549	5	

Notes and Definitions

NA Not Applicable
ND Analyte NOT DETECTED at or above the detection limit
NR Not Reported
MDL Method Detection Limit
PQL Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138


Authorized Signature(s)



CHAIN OF CUSTODY AND ANALYSIS REQUEST

781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

DATE: 52879 PAGE 1 OF 1
LOG BOOK NO. _____ FILE NO. _____ LAB NO. 1409904

CLIENT NAME: <u>CEM</u>			Project Name/No. <u>Melburg Generating Station</u>				P.O. NO.				AIRBILL NO:																																																																					
ADDRESS:							ANALYSES REQUESTED:							COOLER TEMP: <u>0.7°C</u>																																																																		
PROJECT MANAGER: <u>Tom Barnhart</u>			PHONE NO:		FAX NO:		<table border="1" style="width:100%; height: 150px;"> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>																																																																								PRESERVATIVE:	
SAMPLER NAME: <u>Tom Barnhart</u> (Printed) <u>[Signature]</u> (Signature)							REMARKS:																																																																									
TAT (Analytical Turn Around Time): 0 = Same Day; 1 = 1 Day; 2 = 2 Days; 3 = 3 Days; N = Normal (5-7 Working Days)																																																																																
CONTAINER TYPES: B = Brass, E = Encore, G = Glass, P = Plastic, V = VOA Vial, O = Other:																																																																																
UST Project: Y N - Global ID# _____																																																																																
SAMPLE NO.	DATE SAMPLED	TIME SAMPLED	SAMPLE DESCRIPTION	MATRIX				TAT	CONTAINER									SAMPLE CONDITION/CONTAINER /COMMENTS:																																																														
				WATER	SOIL	SLUDGE	OTHER		#	TYPE																																																																						
1	<u>52879</u>	<u>1110</u>	<u>Coating Tank Blunders</u>	<u>X</u>				<u>21</u>	<u>P</u>	<u>X</u>																																																																						
2																																																																																
3																																																																																
4																																																																																
5																																																																																
6																																																																																
7																																																																																
8																																																																																
9																																																																																
10																																																																																

Relinquished By: (Signature and Printed Name)
[Signature]

Received By: (Signature and Printed Name)
[Signature]

Date: 52879

Time: 1135

Relinquished By: (Signature and Printed Name)

Received By: (Signature and Printed Name)

Date: _____

Time: _____

Relinquished By: (Signature and Printed Name)

Received By: (Signature and Printed Name)

Date: _____

Time: _____

SPECIAL INSTRUCTIONS:

SAMPLE DISPOSITION:
 1. Samples returned to client? YES NO
 2. Samples will not be stored over 30 days, unless additional storage time is requested.
 3. Storage time requested: _____ days
 By _____ Date _____

PRESERVATIVE: 1-HNO₃, 2-H₂SO₄, 3-HCL, 4-Zinc Acetate, 5-NaOH, 6-NH₄ Buffer, 7-Other



781 East Washington Blvd., Los Angeles, CA 90021
[213] 745-5312 FAX [213] 745-6372

June 11, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1906017
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on June 04, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.



Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart

Phone: (323) 476-3626 FAX: (323) 476-3640

File #: 74548

Report Date: 06/11/19

Submitted: 06/04/19

PLS Report No.: 1906017

Project: Malburg Generating Station Weekly

Sample ID: Cooling Tower Blowdown Water (1906017-01) **Sampled:** 06/04/19 09:35 **Received:** 06/04/19 09:35

Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch
Total Dissolved Solids	4040		1	mg/L	5.0	SM 2540C	06/10/19	06/11/19	cg	BF91129


Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC	Limit	RPD	Limit	Qualifier
Batch BF91129 --										
Blank Prepared: 06/10/19 Analyzed: 06/11/19										
Total Dissolved Solids	ND	5.0	mg/L							
LCS Prepared: 06/10/19 Analyzed: 06/11/19										
Total Dissolved Solids	358	5.0	mg/L	356.0		101	80-120			
Duplicate Source: 1906017-01 Prepared: 06/10/19 Analyzed: 06/11/19										
Total Dissolved Solids	3980	5.0	mg/L		4040			1.50	5	

Notes and Definitions

NA Not Applicable
ND Analyte NOT DETECTED at or above the detection limit
NR Not Reported
MDL Method Detection Limit
PQL Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138


Authorized Signature(s)


POSITIVE
LAB SERVICE
CHAIN OF CUSTODY AND ANALYSIS REQUEST

 781 East Washington Blvd., Los Angeles, CA 90021
 (213) 745-5312 FAX (213) 745-6372

 DATE: 6-4-79 PAGE 1 OF 1

 LOG BOOK NO. _____ FILE NO. _____ LAB NO. 1906017

CLIENT NAME: <u>Com</u>				Project Name/No. <u>Malburg Generating Station</u>				P.O. NO. _____				AIRBILL NO: _____																																																																																																																										
ADDRESS: _____								ANALYSES REQUESTED: _____				COOLER TEMP: <u>1420</u>																																																																																																																										
PROJECT MANAGER: <u>Tom Barnhart</u>				PHONE NO: _____				FAX NO: _____				PRESERVATIVE: _____																																																																																																																										
SAMPLER NAME: <u>John Barte</u> (Printed) <u>[Signature]</u> (Signature)								<div style="display: flex; align-items: center;"> <div style="writing-mode: vertical-rl; transform: rotate(180deg); font-weight: bold; margin-right: 10px;">TDS</div> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> </table> </div>																																																																																																																		REMARKS: _____												
TAT (Analytical Turn Around Time): 0 = Same Day; 1 = 1 Day; 2 = 2 Days; 3 = 3 Days; N = Normal (5-7 Working Days)																																																																																																																																						
CONTAINER TYPES: B = Brass, E = Encore, G = Glass, P = Plastic, V = VOA Vial, O = Other:																																																																																																																																						
UST Project: Y N - Global ID# _____																																																																																																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">SAMPLE NO.</th> <th rowspan="2">DATE SAMPLED</th> <th rowspan="2">TIME SAMPLED</th> <th rowspan="2">SAMPLE DESCRIPTION</th> <th colspan="4">MATRIX</th> <th rowspan="2">TAT</th> <th colspan="2">CONTAINER</th> </tr> <tr> <th>WATER</th> <th>SOIL</th> <th>SLUDGE</th> <th>OTHER</th> <th>#</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6-4-79</td> <td>0935</td> <td>Coating Tower Blowdown</td> <td>X</td> <td></td> <td></td> <td></td> <td>N</td> <td>1</td> <td>P</td> </tr> <tr><td>2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>								SAMPLE NO.	DATE SAMPLED	TIME SAMPLED	SAMPLE DESCRIPTION	MATRIX				TAT	CONTAINER		WATER	SOIL	SLUDGE	OTHER	#	TYPE	1	6-4-79	0935	Coating Tower Blowdown	X				N	1	P	2											3											4											5											6											7											8											9											10										
SAMPLE NO.	DATE SAMPLED	TIME SAMPLED	SAMPLE DESCRIPTION	MATRIX								TAT	CONTAINER																																																																																																																									
				WATER	SOIL	SLUDGE	OTHER	#	TYPE																																																																																																																													
1	6-4-79	0935	Coating Tower Blowdown	X				N	1	P																																																																																																																												
2																																																																																																																																						
3																																																																																																																																						
4																																																																																																																																						
5																																																																																																																																						
6																																																																																																																																						
7																																																																																																																																						
8																																																																																																																																						
9																																																																																																																																						
10																																																																																																																																						
Relinquished By: (Signature and Printed Name) <u>[Signature]</u>				Received By: (Signature and Printed Name) <u>[Signature]</u>				Date: <u>6-4-79</u> Time: <u>1225</u>		SAMPLE DISPOSITION: 1. Samples returned to client? YES NO 2. Samples will not be stored over 30 days, unless additional storage time is requested. 3. Storage time requested: _____ days By _____ Date _____																																																																																																																												
Relinquished By: (Signature and Printed Name) _____				Received By: (Signature and Printed Name) _____				Date: _____ Time: _____																																																																																																																														
Relinquished By: (Signature and Printed Name) _____				Received By: (Signature and Printed Name) _____				Date: _____ Time: _____																																																																																																																														
SPECIAL INSTRUCTIONS: _____																																																																																																																																						

 PRESERVATIVE: 1-HNO₃, 2-H₂SO₄, 3-HCL, 4-Zinc Acetate, 5-NaOH, 6-NH₄ Buffer, 7-Other



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

June 14, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1906066
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on June 10, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.


Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart Phone: (323) 476-3626 FAX:(323) 476-3640

File #:74548
Report Date: 06/14/19
Submitted: 06/10/19
PLS Report No.: 1906066

Project: Malburg Generating Station Weekly

Sample ID: Cooling Tower Blowdown Water (1906066-01) Sampled: 06/10/19 08:45 Received: 06/10/19 08:45										
Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch
Total Dissolved Solids	4060		1	mg/L	5.0	SM 2540C	06/13/19	06/14/19	vc	BF91413


Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Qualifier
Batch BF91413 ~ ~										
Blank										
Prepared: 06/13/19 Analyzed: 06/14/19										
Total Dissolved Solids	ND	5.0	mg/L							
LCS										
Prepared: 06/13/19 Analyzed: 06/14/19										
Total Dissolved Solids	355	5.0	mg/L	356.0		99.7	80-120			
Duplicate Source: 1906066-01 Prepared: 06/13/19 Analyzed: 06/14/19										
Total Dissolved Solids	4170	5.0	mg/L	4060				2.62	5	

Notes and Definitions

NA Not Applicable
ND Analyte NOT DETECTED at or above the detection limit
NR Not Reported
MDL Method Detection Limit
PQL Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138


Authorized Signature(s)

781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

LOG BOOK NO. _____ FILE NO. _____ LAB NO. 140066

SAMPLE DISPOSITION:		
1. Samples returned to client?	YES	NO
2. Samples will not be stored over 30 days, unless additional storage time is requested.		
3. Storage time requested: _____ day		
By _____		Date _____

LAB COPY



781 East Washington Blvd., Los Angeles, CA 90021
[213] 745-5312 FAX [213] 745-6372

June 24, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1906136
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on June 18, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.



Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart

Phone: (323) 476-3626 FAX: (323) 476-3640

File #: 74548

Report Date: 06/24/19

Submitted: 06/18/19

PLS Report No.: 1906136

Project: Malburg Generating Station Weekly

Sample ID: Cooling Tower Blowdown Water (1906136-01) Sampled: 06/18/19 08:35 Received: 06/18/19 08:35										
Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch
Total Dissolved Solids	4520		1	mg/L	5.0	SM 2540C	06/21/19	06/21/19	dd	BF92416

Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Qualifier
Batch BF92416										
Blank										
Prepared & Analyzed: 06/21/19										
Total Dissolved Solids	ND	5.0	mg/L							
LCS										
Prepared & Analyzed: 06/21/19										
Total Dissolved Solids	351	5.0	mg/L	356.0		98.6	80-120			
Duplicate Source: 1906136-01 Prepared & Analyzed: 06/21/19										
Total Dissolved Solids	4450	5.0	mg/L		4520			1.49	5	

Notes and Definitions

NA Not Applicable
ND Analyte NOT DETECTED at or above the detection limit
NR Not Reported
MDL Method Detection Limit
PQL Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138

Authorized Signature(s)



CHAIN OF CUSTODY AND ANALYSIS REQUEST

781 East Washington Blvd., Los Angeles, CA 90021
(213) 745-5312 FAX (213) 745-6372

DATE: 6/18/19 PAGE 1 OF 1

LOG BOOK NO. _____ FILE NO. _____ LAB NO. 14001310

CLIENT NAME: Cam Project Name/No. Malibu Generating Station P.O. NO. _____ AIRBILL NO: _____

ADDRESS: _____ ANALYSES REQUESTED: _____ COOLER TEMP: 1.1°C

PROJECT MANAGER: Tom Benhart PHONE NO: _____ FAX NO: _____ PRESERVATIVE: _____

SAMPLER NAME: Tom Benhart (Printed) T Benhart (Signature) REMARKS: _____

TAT (Analytical Turn Around Time): 0 = Same Day; 1 = 1 Day; 2 = 2 Days; 3 = 3 Days; N = Normal (5-7 Working Days)

CONTAINER TYPES: B = Brass, E = Encore, G = Glass, P = Plastic, V = VOA Vial, O = Other:

UST Project: Y N - Global ID# _____

SAMPLE NO.	DATE SAMPLED	TIME SAMPLED	SAMPLE DESCRIPTION	MATRIX				TAT	CONTAINER		SAMPLE CONDITION/CONTAINER /COMMENTS:
				WATER	SOIL	SLUDGE	OTHER		#	TYPE	
1	6/11/19	0835	Coding Tower Bladders	L				N	1	P	
2											
3											
4											
5											
6											
7											
8											
9											
10											

Relinquished By: (Signature and Printed Name)

Received By: (Signature and Printed Name)

Date:

Time:

Relinquished By: (Signature and Printed Name)

Received By: (Signature and Printed Name)

Date:

Time:

Relinquished By: (Signature and Printed Name)

Received By: (Signature and Printed Name)

Date:

Time:

SPECIAL INSTRUCTIONS:

SAMPLE DISPOSITION:

1. Samples returned to client? YES NO

2. Samples will not be stored over 30 days, unless additional storage time is requested.

3. Storage time requested: _____ days

By _____ Date _____

PRESERVATIVE: 1-HNO₃, 2-H₂SO₄, 3-HCL, 4-Zinc Acetate, 5-NaOH, 6-NH₄ Buffer, 7-Other

LAB COPY



781 East Washington Blvd., Los Angeles, CA 90021
[213] 745-5312 FAX [213] 745-6372

June 28, 2019

Tom Barnhart
Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Report No.: 1906203
Project Name: Malburg Generating Station Weekly

Dear Tom Barnhart,

This report contains the analytical results for the sample(s) received under chain of custody(s) by Positive Lab Service on June 24, 2019.

The test results in this report are performed in compliance with ELAP accreditation requirements for the certified parameters. The laboratory report may not be produced, except in full, without the written approval of the laboratory.

The issuance of the final Certificate of Analysis takes precedence over any previous Preliminary Report. Preliminary data should not be used for regulatory purposes. Authorized signature(s) is provided on final report only.

If you have any questions in reference to this report, please contact your Positive Lab Service coordinator.


Project Manager



781 East Washington Blvd., Los Angeles, CA 90021
[213] 745-5312 FAX [213] 745-6372

Certificate of Analysis

Page 2 of 2

Colorado Energy Management
4963 Soto St.
Vernon, CA 90058

Attn: Tom Barnhart

Phone: (323) 476-3626 FAX: (323) 476-3640

File #: 74548

Report Date: 06/28/19

Submitted: 06/24/19

PLS Report No.: 1906203

Project: Malburg Generating Station Weekly

Sample ID: Cooling Tower Blowdown Water (1906203-01) Sampled: 06/24/19 09:35 Received: 06/24/19 09:35										
Analyte	Results	Flag	D.F.	Units	PQL	Prep/Test Method	Prepared	Analyzed	By	Batch
Total Dissolved Solids	3960		1	mg/L	5.0	SM 2540C	06/27/19	06/28/19	vc	BF92808

Quality Control Data

Analyte	Result	PQL	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Qualifier
Batch BF92808 - +										
Blank Prepared & Analyzed: 06/28/19										
Total Dissolved Solids	ND	5.0	mg/L							
LCS Prepared & Analyzed: 06/28/19										
Total Dissolved Solids	334	5.0	mg/L	356.0		93.8	80-120			
Duplicate Source: 1906203-01 Prepared & Analyzed: 06/28/19										
Total Dissolved Solids	4020	5.0	mg/L	3960				1.50	5	

Notes and Definitions

NA Not Applicable
ND Analyte NOT DETECTED at or above the detection limit
NR Not Reported
MDL Method Detection Limit
PQL Practical Quantitation Limit

Environmental Laboratory Accreditation Program Certificate No. 1131, Mobile Lab No. 2534, LACSD No. 10138

Authorized Signature(s)



CHAIN OF CUSTODY AND ANALYSIS REQUEST

 781 East Washington Blvd., Los Angeles, CA 90021
 (213) 745-5312 FAX (213) 745-6372

 DATE: 6-24-99 PAGE 1 OF 1
 LOG BOOK NO. _____ FILE NO. _____ LAB NO. 1906203

 CLIENT NAME: CEM Project Name/No. Malibu Generating Station Weekly P.O. NO. _____ AIRBILL NO: _____

 ADDRESS: _____ ANALYSES REQUESTED: _____ COOLER TEMP: 0.7°C

 PROJECT MANAGER: Tom Barnhart PHONE NO: _____ FAX NO: _____ PRESERVATIVE: _____

 SAMPLER NAME: Jann Baire (Printed) [Signature] (Signature) REMARKS: _____

TAT (Analytical Turn Around Time): 0 = Same Day; 1 = 1 Day; 2 = 2 Days; 3 = 3 Days; N = Normal (5-7 Working Days)

CONTAINER TYPES: B = Brass, E = Encore, G = Glass, P = Plastic, V = VOA Vial, O = Other:

UST Project: Y N - Global ID# _____

SAMPLE NO.	DATE SAMPLED	TIME SAMPLED	SAMPLE DESCRIPTION	MATRIX				TAT	CONTAINER		SAMPLE CONDITION/CONTAINER /COMMENTS:
				WATER	SOIL	SLUDGE	OTHER		#	TYPE	
1	<u>6-24-99</u>	<u>0935</u>	<u>Coaling Tower Blowdown</u>	<u>6</u>				<u>N</u>	<u>1</u>	<u>P</u>	<u>Y</u>
2											
3											
4											
5											
6											
7											
8											
9											
10											

Relinquished By: (Signature and Printed Name) <u>[Signature]</u>	Received By: (Signature and Printed Name) <u>[Signature]</u>	Date: <u>6-24-99</u>	Time: <u>0955</u>	SAMPLE DISPOSITION: 1. Samples returned to client? YES NO 2. Samples will not be stored over 30 days, unless additional storage time is requested. 3. Storage time requested: _____ days By _____ Date _____
Relinquished By: (Signature and Printed Name)	Received By: (Signature and Printed Name)	Date:	Time:	
Relinquished By: (Signature and Printed Name)	Received By: (Signature and Printed Name)	Date:	Time:	

SPECIAL INSTRUCTIONS:

PRESERVATIVE: 1-HNO₃, 2-H₂SO₄, 3-HCL, 4-Zinc Acetate, 5-NaOH, 6-NH₄ Buffer, 7-Other

Figure 2-2
Excess Emission Reports

Startup/Shutdown Excess Emissions Report

U1 CO Startup/Shutdown

From: 04/01/2019 00:00 To: 06/30/2019 23:59 Facility Name: Malburg Generating Station
Generated: 07/22/2019 11:01 Location: Vernon, California
Tag Name: U1_CO_LbPerHr_1M
Total Operating Time: 1,692.27 Hours



Unit Operation

Event Period				Reason	Action
Begin/End	Duration in Minute(s)	Lb/Event	Limit	Code - Description	Code - Description

No excess emissions were found in the reporting period.

Startup/Shutdown Excess Emissions Report

U1 NOx Startup/Shutdown

From: 04/01/2019 00:00 **To:** 06/30/2019 23:59 **Facility Name:** Malburg Generating Station
Generated: 07/22/2019 10:19 **Location:** Vernon, California
Tag Name: U1_NOx_LbPerHr_1M
Total Operating Time: 1,692.27 Hours



SI = SampleInvalid, * = Excess Emission

Unit Operation					
----------------	--	--	--	--	--

Event Period				Reason	Action
Begin/End	Duration in Minute(s)	Lb/Event	Limit	Code - Description	Code - Description

No excess emissions were found in the reporting period.

Startup/Shutdown Excess Emissions Report

U1 VOC Startup/Shutdown



From: 04/01/2019 00:00 **To:** 06/30/2019 23:59 **Facility Name:** Malburg Generating Station
Generated: 07/22/2019 10:27 **Location:** Vernon, California
Tag Name: U1_VOC_LbPerHr_1M
Total Operating Time: 1,692.27 Hours

SI = SampleInvalid, * = Excess Emission

Unit Operation					
----------------	--	--	--	--	--

Event Period				Reason	Action
Begin/End	Duration in Minute(s)	Lb/Event	Limit	Code - Description	Code - Description

No excess emissions were found in the reporting period.

Excess Emission Report

Unit 1 - CO ppmvdc 3-hour Rolling during Normal Operation



From: 04/01/2019 00:00 To: 06/30/2019 23:59 Facility Name: Malburg Generating Station
Generated: 07/22/2019 10:14 Location: Vernon, California

Tag Name: U1_CO_3HrRoll_Ppmvdc_1H
Total Operating Time: 1,707.00 Hour(s) No Exclusions Allowed
Non-Operating Time: 477.00 Hour(s) Report Time: 2,184.00 Hour(s)

No incidents have been reported for this reporting period. Data is 100% in compliance.

Total Operating Time:	1,707.00 Hour(s)
Total Duration (Online only):	0.00 Hour(s)
Time in exceedance as a percentage of operating time:	0.00 %
Time in compliance as a percentage of operating time:	100.00 %

Excess Emission Report

Unit 1 - NOx ppmvdc 1-hour during Normal Operation

From: 04/01/2019 00:00 To: 06/30/2019 23:59 Facility Name: Malburg Generating Station
Generated: 07/22/2019 10:16 Location: Vernon, California



Tag Name: U1_NOxNormal_Ppmvdc_1H
Total Operating Time: 1,707.00 Hour(s) No Exclusions Allowed
Non-Operating Time: 477.00 Hour(s) Report Time: 2,184.00 Hour(s)

No incidents have been reported for this reporting period. Data is 100% in compliance.

Total Operating Time:	1,707.00 Hour(s)
Total Duration (Online only):	0.00 Hour(s)
Time in exceedance as a percentage of operating time:	0.00 %
Time in compliance as a percentage of operating time:	100.00 %

Excess Emission Report

Unit 1 - VOC ppmvdc 1-hour during Normal Operation

From: 04/01/2019 00:00 To: 06/30/2019 23:59 Facility Name: Malburg Generating Station
Generated: 07/22/2019 10:17 Location: Vernon, California



Tag Name: U1_VOCNormal_Ppmvdc_1H
Total Operating Time: 1,707.00 Hour(s) No Exclusions Allowed
Non-Operating Time: 477.00 Hour(s) Report Time: 2,184.00 Hour(s)

No incidents have been reported for this reporting period. Data is 100% in compliance.

Total Operating Time:	1,707.00 Hour(s)
Total Duration (Online only):	0.00 Hour(s)
Time in exceedance as a percentage of operating time:	0.00 %
Time in compliance as a percentage of operating time:	100.00 %

Startup/Shutdown Event Report

U2 CO Startup/Shutdown Events



From: 04/01/2019 00:00 **To:** 06/30/2019 23:59 **Facility Name:** Malburg Generating Station
Generated: 07/22/2019 10:59 **Location:** Vernon, California
Tag Name: U2_CO_LbPerHr_1M
Total Operating Time: 1,695.90 Hours

SI = SampleInvalid, * = Excess Emission

Unit Operation					
----------------	--	--	--	--	--

Event Period				Reason	Action
Begin/End	Duration in Minute(s)	Lb/Event	Limit	Code - Description	Code - Description

No excess emissions were found in the reporting period.

Startup/Shutdown Excess Emissions Report

U2 NOx Startup/Shutdown

From: 04/01/2019 00:00 To: 06/30/2019 23:59 Facility Name: Malburg Generating Station
Generated: 07/22/2019 11:12 Location: Vernon, California
Tag Name: U2_NOx_LbPerHr_1M
Total Operating Time: 1,695.90 Hours



Unit Operation

Event Period				Reason	Action
Begin/End	Duration in Minute(s)	Lb/Event	Limit	Code - Description	Code - Description

No excess emissions were found in the reporting period.

Startup/Shutdown Event Report

U2 VOC Startup/Shutdown Events



From: 04/01/2019 00:00 **To:** 06/30/2019 23:59 **Facility Name:** Malburg Generating Station
Generated: 07/22/2019 11:14 **Location:** Vernon, California
Tag Name: U2_VOC_LbPerHr_1M
Total Operating Time: 1,695.90 Hours

SI = SampleInvalid, * = Excess Emission

Unit Operation					
----------------	--	--	--	--	--

Event Period				Reason	Action
Begin/End	Duration in Minute(s)	Lb/Event	Limit	Code - Description	Code - Description

No excess emissions were found in the reporting period.

Excess Emission Report
Unit 2 - CO ppmvdc 3-hour Rolling during Normal Operation



From: 04/01/2019 00:00 To: 06/30/2019 23:59 Facility Name: Malburg Generating Station
Generated: 07/22/2019 11:05 Location: Vernon, California

Tag Name: U2_CO_3HrRoll_Ppmvdc_1H
Total Operating Time: 1,714.00 Hour(s) No Exclusions Allowed
Non-Operating Time: 470.00 Hour(s) Report Time: 2,184.00 Hour(s)

No incidents have been reported for this reporting period. Data is 100% in compliance.

Total Operating Time:	1,714.00 Hour(s)
Total Duration (Online only):	0.00 Hour(s)
Time in exceedance as a percentage of operating time:	0.00 %
Time in compliance as a percentage of operating time:	100.00 %

Excess Emission Report

Unit 2 - NOx ppmvdc 1-hour during Normal Operation



From: 04/01/2019 00:00 To: 06/30/2019 23:59 Facility Name: Malburg Generating Station
Generated: 07/22/2019 11:09 Location: Vernon, California

Tag Name: U2_NOxNormal_Ppmvdc_1H
Total Operating Time: 1,714.00 Hour(s) No Exclusions Allowed
Non-Operating Time: 470.00 Hour(s) Report Time: 2,184.00 Hour(s)

No incidents have been reported for this reporting period. Data is 100% in compliance.

Total Operating Time:	1,714.00 Hour(s)
Total Duration (Online only):	0.00 Hour(s)
Time in exceedance as a percentage of operating time:	0.00 %
Time in compliance as a percentage of operating time:	100.00 %

Excess Emission Report

Unit 2 - VOC ppmvdc 1-hour during Normal Operation



From: 04/01/2019 00:00 To: 06/30/2019 23:59 Facility Name: Malburg Generating Station
Generated: 07/22/2019 11:09 Location: Vernon, California

Tag Name: U2_VOCNormal_Ppmvdc_1H
Total Operating Time: 1,714.00 Hour(s) No Exclusions Allowed
Non-Operating Time: 470.00 Hour(s) Report Time: 2,184.00 Hour(s)

No incidents have been reported for this reporting period. Data is 100% in compliance.

Total Operating Time:	1,714.00 Hour(s)
Total Duration (Online only):	0.00 Hour(s)
Time in exceedance as a percentage of operating time:	0.00 %
Time in compliance as a percentage of operating time:	100.00 %

Figure 2-3
Diesel Fuel Oil Specifications

SC Fuels
P.O. Box 14237
Orange, CA 92863-1237
Tel: 800-659-5823
Fax: 714-992-7377
Credit Inquiries: 888-364-0121



Order#: 1427153
Order Date: 5/15/2019
Delv Req Date: 5/20/2019
Sales Person: 0177 - Todd Cripps

SOLD TO: 01-0001084
COLORADO ENERGY MANAGEMENT LLC
ATTN: ACCOUNTS PAYABLE
4963 S. SOTO STREET
VERNON, CA 90058
(323) 476-3622

SHIP TO: 1L
COLORADO ENERGY MANAGEMENT LLC
4963 SOTO STREET
VERNON, CA 90058
(323) 476-3632

Confirm To: ASHLEY HURD
Customer PO: MGS16324

Ship Via:

Whse: 101

Terms: N30

HM	Product Code / Desc / Svc Type	Qty Ordered / Package Desc	Ext Qty Ordered	Qty Delivered	Unit Price	Extended Amount
X	UN1202, DIESEL FUEL, 3, PG III - NONTAXABLE USE ONLY, PENALTY FOR TAXABLE USE					
	422D055 30 CARB ULTRA L.S. DYED DIESEL	2.00 55 GAL DRM	110.00 GALS	2		
	CH277210983D400 30 MEROPA 150 NRD#LT	1.00 400 LB DRM	400.00 LBS	1		
	DRUMDEPOSITC001 30 DRUM DEPOSIT FEE	2.00 MISC CHRG	2.00 EACH	2		
	/FUELCH 30 FUEL SURCHARGE		0.00			
	/RCF 30 REGULATORY COMPLIANCE FEE		0.00			

Received in INFOR
5 / 20 / 19
M. Gordon

Rec'd by [Signature] Date 5/20/19

Print Name Michael Gordon

Driver's Signature [Signature]

ARRIVED LOAD POINT	AM	DATE	COMPLETED LOADING	AM	DATE	TRUCK #	B/L #	FOR COMPANY USE ONLY
	PM			PM				RT <input type="checkbox"/> TF <input type="checkbox"/> OP <input type="checkbox"/>
ARRIVED DESTINATION	AM	DATE	COMPLETED UNLOADING	AM	DATE	D.O.T. HAZARDOUS MATERIALS PLACARD PROVIDED		
	PM			PM		BY SHIPPER <input type="checkbox"/> CARRIER <input type="checkbox"/>		
END TANK	GAS	DIESEL	OTHER	WATER DETECTED ?	GRAVITY	THIS IS TO CERTIFY THAT THE ABOVE NAMED MATERIALS ARE PROPERLY CLASSIFIED, DESCRIBED, PACKAGED, MARKED AND LABELED AND ARE IN PROPER CONDITION FOR TRANSPORTATION ACCORDING TO APPLICABLE REGULATIONS OF THE DEPARTMENT OF TRANSPORTATION.		
BEGINNING TANK	GAS	DIESEL	OTHER	<input type="checkbox"/> YES <input type="checkbox"/> NO	DRUM DEPOSIT			
					DRUM CREDIT	IN THE EVENT OF A HAZARDOUS MATERIALS INCIDENT - CALL 1-800-424-9300		

FOR CHEMICAL EMERGENCY
Spill, Leak, Fire Exposure or Accident
CALL CHEMTREC - DAY OR NIGHT
800-424-9300



CHEVRON GST[®] OILS

ISO 32, 46, 68, 100

CUSTOMER BENEFITS

Chevron GST Oils deliver value through:

- **Superior oxidation stability** for long service life at elevated temperatures.
- **Rust and corrosion protection**
- **High viscosity index** assures minimum viscosity change when variations in temperature occur.
- **Minimum foam** prevents sump overflow or erratic governor operation.
- **Fast air release** minimizes possibility of pump cavitation in systems with high circulation rates and small reservoirs.
- **Superior thermal stability** minimizes deposit formation.
- **Rapid water separation** keeps water in oil to a minimum.
- **Hydraulic fluid service** — Chevron GST Oils ISO 32, 46, and 68 are excellent hydraulic fluids in low pressure systems up to 1000 psi.
- **Air compressor** lubricant when OEM recommends R&O type oil.
- **Environmental benefits** — All grades are ashless. This facilitates reclaiming and recycling of the used oils. Chevron GST Oils are not expected to be harmful to aquatic organisms.

FEATURES

Chevron GST Oils are designed to meet the critical demands of:

- gas, steam, and hydroelectric turbine bearing lubrication
- reduction gear lubrication in marine operations

They are an excellent recommendation for many other industrial applications including air compression.

Chevron GST Oils are formulated with ISOSYN[®] base stocks.

Higher temperatures in advanced gas and steam turbines require a circulating system oil with exceptional high temperature stability. Chevron GST Oils have outstanding **thermal and oxidation stability**.

Nonvolatile **oxidation inhibition** minimizes the evaporative loss of the inhibitors, a common problem with turbine oils where bearing temperatures are high and system capacities are limited. With retained oxidation resistance for long periods under high temperature conditions, Chevron GST Oils have proven they will provide longer oil service life and reduced turbine down time.

Corrosion inhibition protects costly turbine shafts and gears from corrosion and rusting.

Chevron GST Oils have excellent demulsibility characteristics which allow these oils to maintain a high film strength coating on critical wear points of bearings and gear reducers and assure fast removal of water contamination.

Foam inhibition prevents sump overflow and erratic governor operation.



APPLICATIONS

Chevron GST Oils are recommended for use in turbines of all types including gas, steam, and hydroelectric turbines, and marine gear turbine sets.

The following viscosity grades are formulated to meet the specified OEM requirements:

Chevron GST Oil ISO 32

- meets and exceeds
 - **General Electric** GEK-32568f, GEK 28143A, GEK-46506D, GEK-27070
 - **Ingersoll Rand** specification for Centac Centrifugal Compressors
 - **Solar** ES 9 224 requirements for gas turbine oils
 - **ASTM D4304, British Standard 489, and DIN 51515** standard organization requirements for new lubricants used in gas and steam turbines and auxiliary equipment
- is approved by
 - **Cincinnati Machine** P-38
 - **Alstom Power** HTGD 90117
 - **Siemens Westinghouse** M spec 55125Z3
 - **Siemens** TLV 901304

Chevron GST Oil ISO 46

- meets
 - **General Electric** and **Westinghouse** requirements for marine gas turbine system oils. Recommended by Siemens Westinghouse for reactor coolant pump motor bearings.
 - **Siemens** TLV 901304
 - **Solar** ES 9 224 requirements for gas turbine oils
 - **ASTM D4304, British Standard 489, and DIN 51515** standard organization requirements for new lubricants used in gas and steam turbines and auxiliary equipment
- is approved by
 - **Cincinnati Machine** P 55
 - **Alstom Power** HTGD 90117

Chevron GST Oil ISO 68

- meets
 - meets **General Electric, Alstom, Westinghouse**, and other OEM requirements for hydroelectric turbines, land and marine steam turbines, and associated reduction gears
 - **ASTM D4304, British Standard 489, and DIN 51515** standard organization requirements for new lubricants used in gas and steam turbines and auxiliary equipment
- is approved by
 - **Cincinnati Machine** P-54

Chevron GST Oil ISO 100

- meets
 - meets **General Electric, Alstom, Westinghouse**, and other OEM requirements for hydroelectric turbines, land and marine steam turbines, and associated reduction gears
 - **ASTM D4304, British Standard 489, and DIN 51515** standard organization requirements for new lubricants used in gas and steam turbines and auxiliary equipment

Chevron GST Oils ISO 32, 46, 68, and 100 are registered with NSF and are acceptable as lubricants where there is no possibility of food contact (H2) in and around food processing areas. The NSF Nonfood Compounds Registration Program is a continuation of the USDA product approval and listing program, which is based on meeting regulatory requirements of appropriate use, ingredient review and labeling verification.

Do not use in high pressure systems in the vicinity of flames, sparks and hot surfaces. Use only in well ventilated areas. Keep container closed.

Do not use in breathing air apparatus or medical equipment.

TYPICAL TEST DATA


ISO Grade	32	46	68	100
CPS Number	253026	253027	253028	253029
MSDS Number	6710	6710	6710	6710
AGMA Grade	—	1	2	3
API Gravity	32.7	32.0	31.7	31.4
Viscosity, Kinematic cSt at 40°C cSt at 100°C	30.4 5.2	43.7 6.6	64.6 8.5	95.0 11.0
Viscosity, Saybolt SUS at 100°F SUS at 210°F	157 43.8	225 48.2	334 54.8	495 63.9
Viscosity Index	102	101	102	100
Flash Point, °C(°F)	222(432)	224(435)	245(473)	262(504)
Pour Point, °C(°F)	-36(-33)	-36(-33)	-33(-27)	-30(-22)
Oxidation Stability ASTM D 943 ¹ ASTM D 2272 ²	17,000 1700	12,000 1400	11,000 1400	11,000 1400
FZG, Pass stage, DIN 51354	—	—	—	—

Typical test data are average values only. Minor variations which do not affect product performance are to be expected in normal manufacturing.

- 1 Hours to 2.0 mg KOH/g acid number modified D943
- 2 Minutes to 25 psi pressure drop

Material Safety Data Sheet

Diesel Low Sulfur (LSD) and Ultra Low Sulfur Diesel (ULSD)

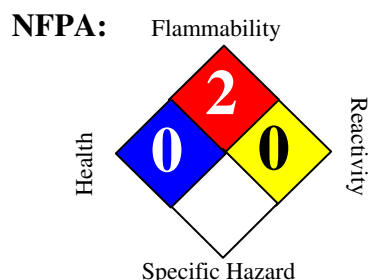

HMIS III:

HEALTH	1
FLAMMABILITY	2
PHYSICAL	0

0 = Insignificant, 1 = Slight, 2 = Moderate, 3 = High, 4 = Extreme

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product name	:	Diesel Low Sulfur (LSD) and Ultra Low Sulfur Diesel (ULSD)			
Synonyms	:	CARB Diesel, 888100004478			
MSDS Number	:	888100004478	Version	:	2.10
Product Use Description	:	Fuel			
Company	:	For: Tesoro Refining & Marketing Co. 19100 Ridgewood Parkway, San Antonio, TX 78259			
Tesoro Call Center	:	(877) 783-7676	Chemtrec (Emergency Contact)	:	(800) 424-9300

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Regulatory status	: This material is considered hazardous by the Occupational Safety and Health Administration (OSHA) Hazard Communication Standard (29 CFR 1910.1200).
Signal Word	: WARNING
Hazard Summary	: Toxic. Combustible Liquid

Potential Health Effects

Eyes	: Eye irritation may result from contact with liquid, mists, and/or vapors.
Inhalation	: Vapors or mists from this material can irritate the nose, throat, and lungs, and can cause signs and symptoms of central nervous system depression, depending on the concentration and duration of exposure.
Skin	: Skin irritation leading to dermatitis may occur upon prolonged or repeated contact. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are repeatedly exposed. Long-term, repeated skin contact may cause skin cancer
Ingestion	: Harmful or fatal if swallowed. Do NOT induce vomiting. This material can irritate the mouth, throat, stomach, and cause nausea, vomiting, diarrhea and restlessness Aspiration hazard if liquid is inhaled into lungs, particularly from vomiting after ingestion. Aspiration may result in chemical pneumonia, severe lung damage, respiratory failure and even death.

Target Organs : Central nervous system, Eyes, Skin, Kidney, Liver

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Component	CAS-No.	Weight %
Fuels, diesel, No 2; Gasoil - unspecified	68476-34-6	100%
Nonane	111-84-2	0 - 5%
Naphthalene	91-20-3	0 - 1%
1,2,4-Trimethylbenzene	95-63-6	0 - 2%
Xylene	1330-20-7	0 - 2%
Sulfur	7704-34-9	15 ppm maximum

SECTION 4. FIRST AID MEASURES

Inhalation	: Move to fresh air. Give oxygen. If breathing is irregular or stopped, administer artificial respiration. Seek medical attention immediately.
Skin contact	: Take off all contaminated clothing immediately. Wash off immediately with soap and plenty of water. Wash contaminated clothing before re-use. If skin irritation persists, seek medical attention immediately.
Eye contact	: Remove contact lenses. Rinse thoroughly with plenty of water for at least 15 minutes. If symptoms persist, seek medical attention.
Ingestion	: Do not induce vomiting without medical advice. If a person vomits when lying on his back, place him in the recovery position. Seek medical attention immediately.
Notes to physician	: Symptoms: Dizziness, Discomfort, Headache, Nausea, Disorder, Vomiting, Lung edema, Aspiration may cause pulmonary edema and pneumonitis, Liver disorders, Kidney disorders.

SECTION 5. FIRE-FIGHTING MEASURES

Form	: Liquid
Flash point	: 38°C Minimum for #1 Diesel, 52°C Minimum for #2 Diesel
Auto Ignition temperature	: 257 °C (495 °F)
Lower explosive limit	: 0.6 %(V)
Upper explosive limit	: 4.7 %(V)
Suitable extinguishing media	: Carbon dioxide (CO2), Water spray, Dry chemical, Foam, Keep containers and surroundings cool with water spray.
Specific hazards during fire fighting	: Fire Hazard Do not use a solid water stream as it may scatter and spread fire. Cool closed containers exposed to fire with water spray.
Special protective equipment	: Wear self-contained breathing apparatus and protective suit. Use personal

for fire-fighters	protective equipment.
Further information	: Exposure to decomposition products may be a hazard to health. Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions	: Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to contain spill areas. Spills may infiltrate subsurface soil and groundwater; professional assistance may be necessary to determine the extent of subsurface impact. Ensure adequate ventilation. Use personal protective equipment.
Environmental precautions	: Carefully contain and stop the source of the spill, if safe to do so. Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection. Discharge into the environment must be avoided. If the product contaminates rivers and lakes or drains inform respective authorities.
Methods for cleaning up	: Take up with sand or oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal - caution, flammable vapors may accumulate in closed containers. Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

CERCLA Hazardous substances and corresponding RQs :

Xylene	1330-20-7	100 lbs
Naphthalene	91-20-3	100 lbs
Nonane	111-84-2	100 lbs

SECTION 7. HANDLING AND STORAGE

Handling	: Keep away from fire, sparks and heated surfaces. No smoking near areas where material is stored or handled. The product should only be stored and handled in areas with intrinsically safe electrical classification.
Advice on protection against fire and explosion	: Hydrocarbon liquids including this product can act as a non-conductive flammable liquid (or static accumulators), and may form ignitable vapor-air mixtures in storage tanks or other containers. Precautions to prevent static-initated fire or explosion during transfer, storage or handling, include but are not limited to these examples: <ol style="list-style-type: none"> (1) Ground and bond containers during product transfers. Grounding and bonding may not be adequate protection to prevent ignition or explosion of hydrocarbon liquids and vapors that are static accumulators. (2) Special slow load procedures for "switch loading" must be followed to

avoid the static ignition hazard that can exist when higher flash point material (such as fuel oil or diesel) is loaded into tanks previously containing low flash point products (such as gasoline or naphtha).

(3) Storage tank level floats must be effectively bonded.

For more information on precautions to prevent static-initiated fire or explosion, see NFPA 77, Recommended Practice on Static Electricity (2007), and API Recommended Practice 2003, Protection Against Ignitions Arising Out of Static, Lightning, and Stray Currents (2008).

Dust explosion class : Not applicable

Requirements for storage areas and containers : Keep away from flame, sparks, excessive temperatures and open flame. Use approved containers. Keep containers closed and clearly labeled. Empty or partially full product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose containers to sources of ignition. Store in a well-ventilated area. The storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks".

Other data : Emergency eye wash capability should be available in the near proximity to operations presenting a potential splash exposure.

Advice on common storage Keep away from food, drink and animal feed. Incompatible with oxidizing agents. Incompatible with acids.

SECTION 8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure Guidelines

List	Components	CAS-No.	Type:	Value
OSHA Z1	Xylene	1330-20-7	PEL	100 ppm 435 mg/m3
	Naphthalene	91-20-3	PEL	10 ppm 50 mg/m3
ACGIH	Diesel Fuel	68476-30-2	TWA	100 mg/m3
	Xylene	1330-20-7	TWA	100 ppm
		1330-20-7	STEL	150 ppm
	Naphthalene	91-20-3	TWA	10 ppm
		91-20-3	STEL	15 ppm
	Nonane	111-84-2	TWA	200 ppm

Engineering measures : Use adequate ventilation to keep gas and vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces. Use only intrinsically safe electrical equipment approved for use in classified areas.

Eye protection : Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

Hand protection : Gloves constructed of nitrile, neoprene, or PVC are recommended. Consult manufacturer specifications for further information.

Skin and body protection	: If needed to prevent skin contact, chemical protective clothing such as of DuPont TyChem®, Saranex or equivalent recommended based on degree of exposure. The resistance of specific material may vary from product to product as well as with degree of exposure.
Respiratory protection	: A NIOSH/ MSHA-approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited. Refer to OSHA 29 CFR 1910.134, ANSI Z88.2-1992, NIOSH Respirator Decision Logic, and the manufacturer for additional guidance on respiratory protection selection. Use a NIOSH/ MSHA-approved positive-pressure supplied-air respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.
Work / Hygiene practices	: Emergency eye wash capability should be available in the near proximity to operations presenting a potential splash exposure. Use good personal hygiene practices. Avoid repeated and/or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Do not use as a cleaning solvent on the skin. Do not use solvents or harsh abrasive skin cleaners for washing this product from exposed skin areas. Waterless hand cleaners are effective. Promptly remove contaminated clothing and launder before reuse. Use care when laundering to prevent the formation of flammable vapors which could ignite via washer or dryer. Consider the need to discard contaminated leather shoes and gloves.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Form	: Liquid
Appearance	: Clear, straw colored
Odor	: Characteristic petroleum (kerosene) odor
Flash point - typical	: 38 °C Minimum for #1 Diesel, 52 °C Minimum for #2 Diesel
Auto Ignition temperature	: 257 °C (495 °F)
Thermal decomposition	: No decomposition if stored and applied as directed.
Lower explosive limit	: 0.6 %(V)
Upper explosive limit	: 4.7 %(V)
pH	: Not applicable
Freezing point	: No data available
Boiling point	: 148 - 372 °C(298 - 702 °F)
Vapor Pressure	: < 2 mm Hg at 20 °C
Density	: 0.86 g/cm ³
Water solubility	: Negligible
Viscosity, dynamic	: 1.7 - 40 mPa.s at 37.8 °C (100.0 °F)

Percent Volatiles : 100 %

Conductivity
(conductivity can be reduced
by environmental factors such
as a decrease in temperature

Diesel Fuel Oils at terminal load rack: At least 25 pS/m
Ultra Low Sulfur Diesel (ULSD) without conductivity additive: 0 pS/m to 5 pS/m
ULSD at terminal load rack with conductivity additive: At least 50 pS/m but
conductivity may decrease from environmental factors such as temperature drop.
JP-8 at terminal load rack: 150 pS/m to 600 pS/m

SECTION 10. STABILITY AND REACTIVITY

Conditions to avoid : Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources. Keep away from strong oxidizers. Viton ® ; Fluorel ®

Materials to avoid : Strong oxidizing agents. Peroxides

Hazardous decomposition products : Carbon monoxide, carbon dioxide and noncombusted hydrocarbons (smoke). Diesel exhaust particulates may be a lung hazard - see Section 11.

Thermal decomposition : No decomposition if stored and applied as directed.

Hazardous reactions : Keep away from oxidizing agents, and acidic or alkaline products.

SECTION 11. TOXICOLOGICAL INFORMATION

Carcinogenicity

NTP : Naphthalene (CAS-No.: 91-20-3)

IARC : Naphthalene (CAS-No.: 91-20-3)

OSHA : No component of this product which is present at levels greater than or equal to 0.1 % is identified as a carcinogen or potential carcinogen by OSHA.

CA Prop 65 : WARNING! This product contains a chemical known to the State of California to cause cancer.
naphthalene (CAS-No.: 91-20-3)

Skin irritation : Irritating to skin.

Eye irritation : Irritating to eyes.

Further information : Studies have shown that similar products produce skin cancer or skin tumors in laboratory animals following repeated applications without washing or removal. The significance of this finding to human exposure has not been determined. Other studies with active skin carcinogens have shown that washing the animal's skin with soap and water between applications reduced tumor formation. Positive mutagenicity results have been reported. Repeated over-exposure may cause liver and kidney injury. IARC classifies whole diesel fuel exhaust particulates as probably carcinogenic to humans (Group 2A). NIOSH regards whole diesel fuel exhaust particulates as a potential cause of occupational lung cancer based on animal studies and limited evidence in humans.

Component:

Fuels, diesel, No 2; Gasoil - unspecified

68476-34-6

Acute oral toxicity: LD50 rat
Dose: 5,001 mg/kg

Acute dermal toxicity: LD50 rabbit

Dose: 2,001 mg/kg

Acute inhalation toxicity: LC50 rat

Dose: 7.64 mg/l

Exposure time: 4 h

Skin irritation: Classification: Irritating to skin.

Result: Severe skin irritation

Eye irritation: Classification: Irritating to eyes.

Result: Mild eye irritation

Nonane

111-84-2

Acute oral toxicity: LD50 mouse

Dose: 218 mg/kg

Acute inhalation toxicity: LC50 rat

Exposure time: 4 h

Naphthalene

91-20-3

Acute oral toxicity: LD50 rat

Dose: 2,001 mg/kg

Acute dermal toxicity: LD50 rat

Dose: 2,501 mg/kg

Acute inhalation toxicity: LC50 rat

Dose: 101 mg/l

Exposure time: 4 h

Skin irritation: Classification: Irritating to skin.

Result: Mild skin irritation

Eye irritation: Classification: Irritating to eyes.

Result: Mild eye irritation

Carcinogenicity: N11.00422130

1,2,4-Trimethylbenzene

95-63-6

Acute inhalation toxicity: LC50 rat

Dose: 18 mg/l

Exposure time: 4 h

Skin irritation: Classification: Irritating to skin.

Result: Skin irritation

Eye irritation: Classification: Irritating to eyes.

Result: Eye irritation

Xylene

1330-20-7

Acute oral toxicity: LD50 rat

Dose: 2,840 mg/kg

Acute dermal toxicity: LD50 rabbit

Dose: ca. 4,500 mg/kg

Acute inhalation toxicity: LC50 rat

Dose: 6,350 mg/l

Exposure time: 4 h

Skin irritation: Classification: Irritating to skin.

Result: Mild skin irritation

Repeated or prolonged exposure may cause skin irritation and dermatitis, due to degreasing properties of the product.

Eye irritation: Classification: Irritating to eyes.

Result: Mild eye irritation

SECTION 12. ECOLOGICAL INFORMATION

Additional ecological : Keep out of sewers, drainage areas, and waterways. Report spills and releases, as

information

applicable, under Federal and State regulations.

Component:**Naphthalene**

91-20-3

Toxicity to algae:

EC50

Species:

Dose: 33 mg/l

Exposure time: 24 h

1,2,4-Trimethylbenzene

95-63-6

Toxicity to fish:

LC50

Species: Pimephales promelas (fathead minnow)

Dose: 7.72 mg/l

Exposure time: 96 h

Acute and prolonged toxicity for aquatic invertebrates:

EC50

Species: Daphnia

Dose: 3.6 mg/l

Exposure time: 48 h

SECTION 13. DISPOSAL CONSIDERATIONS**Disposal**

: In accordance with local and national regulations.

SECTION 14. TRANSPORT INFORMATION**CFR**

Proper shipping name : DIESEL FUEL
UN-No. : UN1202 (NA 1993)
Class : 3
Packing group : III

TDG

Proper shipping name : DIESEL FUEL
UN-No. : UN1202 (NA 1993)
Class : 3
Packing group : III

IATA Cargo Transport

UN UN-No. : UN1202 (NA 1993)
Description of the goods : DIESEL FUEL
Class : 3
Packaging group : III
ICAO-Labels : 3
Packing instruction (cargo aircraft) : 310
Packing instruction (cargo aircraft) : Y309

IATA Passenger Transport

UN UN-No. : UN1202 (NA 1993)
Description of the goods : DIESEL FUEL
Class : 3
Packaging group : III

ICAO-Labels : 3
Packing instruction : 309
(passenger aircraft)
Packing instruction : Y309
(passenger aircraft)

IMDG-Code

UN-No. : UN 1202 (NA 1993)
Description of the goods : DIESEL FUEL
Class : 3
Packaging group : III
IMDG-Labels : 3
EmS Number : F-E S-E
Marine pollutant : No

SECTION 15. REGULATORY INFORMATION

OSHA Hazards : Combustible Liquid
Moderate skin irritant
Moderate eye irritant
Toxic by ingestion
POSSIBLE CANCER HAZARD

TSCA Status : On TSCA Inventory

DSL Status : All components of this product are on the Canadian DSL list.

SARA 311/312 Hazards : Fire Hazard
Acute Health Hazard
Chronic Health Hazard

SARA III US. EPA Emergency Planning and Community Right-To-Know Act (EPCRA) SARA Title III Section 313 Toxic Chemicals (40 CFR 372.65) - Supplier Notification Required

Components**CAS-No.**

Xylene 1330-20-7

1,2,4-Trimethylbenzene 95-63-6

Naphthalene 91-20-3

PENN RTK US. Pennsylvania Worker and Community Right-to-Know Law (34 Pa. Code Chap. 301-323)

Components**CAS-No.**

Nonane 111-84-2

Naphthalene 91-20-3

1,2,4-Trimethylbenzene 95-63-6

xylene 1330-20-7

Fuels, diesel, No 2; Gasoil - unspecified 68476-34-6

MASS RTK US. Massachusetts Commonwealth's Right-to-Know Law (Appendix A to 105 Code of Massachusetts Regulations Section 670.000)

Components**CAS-No.**

Xylene 1330-20-7

1,2,4-Trimethylbenzene 95-63-6

Naphthalene 91-20-3

Nonane 111-84-2

NJ RTK

US. New Jersey Worker and Community Right-to-Know Act (New Jersey Statute Annotated Section 34:5A-5)

Components

CAS-No.

Nonane 111-84-2

Naphthalene 91-20-3

1,2,4-Trimethylbenzene 95-63-6

Xylene 1330-20-7

Fuels, diesel, No 2; Gasoil - unspecified 68476-34-6

California Prop. 65

: WARNING! This product contains a chemical known to the State of California to cause cancer.

Naphthalene 91-20-3

SECTION 16. OTHER INFORMATION

Further information

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Prepared by : GWU mbH
Birlenbacher Str. 18
D-57078 Siegen

Germany

Telephone: +49-(0)271-88072-0

10/15/2009

65, 66, 295

Figure 2-4
Cooling Tower PM10 Guidance

Calculating Realistic PM₁₀ Emissions from Cooling Towers

Abstract No. 216 Session No. AM-1b

Joel Reisman and Gordon Frisbie

Greystone Environmental Consultants, Inc., 650 University Avenue, Suite 100, Sacramento, California 95825

ABSTRACT

Particulate matter less than 10 micrometers in diameter (PM₁₀) emissions from wet cooling towers may be calculated using the methodology presented in EPA's AP-42¹, which assumes that all total dissolved solids (TDS) emitted in "drift" particles (liquid water entrained in the air stream and carried out of the tower through the induced draft fan stack.) are PM₁₀. However, for wet cooling towers with medium to high TDS levels, this method is overly conservative, and predicts significantly higher PM₁₀ emissions than would actually occur, even for towers equipped with very high efficiency drift eliminators (e.g., 0.0006% drift rate). Such over-prediction may result in unrealistically high PM₁₀ modeled concentrations and/or the need to purchase expensive Emission Reduction Credits (ERCs) in PM₁₀ non-attainment areas. Since these towers have fairly low emission points (10 to 15 m above ground), over-predicting PM₁₀ emission rates can easily result in exceeding federal Prevention of Significant Deterioration (PSD) significance levels at a project's fence line. This paper presents a method for computing realistic PM₁₀ emissions from cooling towers with medium to high TDS levels.

INTRODUCTION

Cooling towers are heat exchangers that are used to dissipate large heat loads to the atmosphere. Wet, or evaporative, cooling towers rely on the latent heat of water evaporation to exchange heat between the process and the air passing through the cooling tower. The cooling water may be an integral part of the process or may provide cooling via heat exchangers, for example, steam condensers. Wet cooling towers provide direct contact between the cooling water and air passing through the tower, and as part of normal operation, a very small amount of the circulating water may be entrained in the air stream and be carried out of the tower as "drift" droplets. Because the drift droplets contain the same chemical impurities as the water circulating through the tower, the particulate matter constituent of the drift droplets may be classified as an emission. The magnitude of the drift loss is influenced by the number and size of droplets produced within the tower, which are determined by the tower fill design, tower design, the air and water patterns, and design of the drift eliminators.

AP-42 METHOD OF CALCULATING DRIFT PARTICULATE

EPA's AP-42¹ provides available particulate emission factors for wet cooling towers, however, these values only have an emission factor rating of "E" (the lowest level of confidence acceptable). They are also rather high, compared to typical present-day manufacturers' guaranteed drift rates, which are on the order of 0.0006%. (Drift emissions are typically

expressed as a percentage of the cooling tower water circulation rate). AP-42 states that “a *conservatively high* PM₁₀ emission factor can be obtained by (a) multiplying the total liquid drift factor by the TDS fraction in the circulating water, and (b) assuming that once the water evaporates, all remaining solid particles are within the PM₁₀ range.” (Italics per EPA).

If TDS data for the cooling tower are not available, a source-specific TDS content can be estimated by obtaining the TDS for the make-up water and multiplying it by the cooling tower cycles of concentration. [The cycles of concentration is the ratio of a measured parameter for the cooling tower water (such as conductivity, calcium, chlorides, or phosphate) to that parameter for the make-up water.]

Using AP-42 guidance, the total particulate emissions (PM) (after the pure water has evaporated) can be expressed as:

$$\text{PM} = \text{Water Circulation Rate} \times \text{Drift Rate} \times \text{TDS} \quad [1]$$

For example, for a typical power plant wet cooling tower with a water circulation rate of 146,000 gallons per minute (gpm), drift rate of 0.0006%, and TDS of 7,700 parts per million by weight (ppmw):

$$\text{PM} = 146,000 \text{ gpm} \times 8.34 \text{ lb water/gal} \times 0.0006/100 \times 7,700 \text{ lb solids}/10^6 \text{ lb water} \times 60 \text{ min/hr} = \underline{3.38 \text{ lb/hr}}$$

On an annual basis, this is equivalent to almost 15 tons per year (tpy). Even for a state-of-the-art drift eliminator system, this is not a small number, especially if assumed to all be equal to PM₁₀, a regulated criteria pollutant. However, as the following analysis demonstrates, only a very small fraction is actually PM₁₀.

COMPUTING THE PM₁₀ FRACTION

Based on a representative drift droplet size distribution and TDS in the water, the amount of solid mass in each drop size can be calculated. That is, for a given initial droplet size, assuming that the mass of dissolved solids condenses to a spherical particle after all the water evaporates, and assuming the density of the TDS is equivalent to a representative salt (e.g., sodium chloride), the diameter of the final solid particle can be calculated. Thus, using the drift droplet size distribution, the percentage of drift mass containing particles small enough to produce PM₁₀ can be calculated. This method is conservative as the final particle is assumed to be perfectly spherical; hence as small a particle as can exist.

The droplet size distribution of the drift emitted from the tower is critical to performing the analysis. Brentwood Industries, a drift eliminator manufacturer, was contacted and agreed to provide drift eliminator test data from a test conducted by Environmental Systems Corporation (ESC) at the Electric Power Research Institute (EPRI) test facility in Houston, Texas in 1988 (Aull², 1999). The data consist of water droplet size distributions for a drift eliminator that achieved a tested drift rate of 0.0003 percent. As we are using a 0.0006 percent drift rate, it is reasonable to expect that the 0.0003 percent drift rate would produce smaller droplets, therefore,

this size distribution data can be assumed to be conservative for predicting the fraction of PM₁₀ in the total cooling tower PM emissions.

In calculating PM₁₀ emissions the following assumptions were made:

- Each water droplet was assumed to evaporate shortly after being emitted into ambient air, into a single, solid, spherical particle.
- Drift water droplets have a density (ρ_w) of water; 1.0 g/cm³ or 1.0 * 10⁻⁶ $\mu\text{g} / \mu\text{m}^3$.
- The solid particles were assumed to have the same density (ρ_{TDS}) as sodium chloride, (i.e., 2.2 g/cm³).

Using the formula for the volume of a sphere, $V = 4\pi r^3 / 3$, and the density of pure water, $\rho_w = 1.0 \text{ g/cm}^3$, the following equations can be used to derive the solid particulate diameter, D_p , as a function of the TDS, the density of the solids, and the initial drift droplet diameter, D_d :

$$\text{Volume of drift droplet} = (4/3)\pi(D_d/2)^3 \quad [2]$$

$$\text{Mass of solids in drift droplet} = (\text{TDS})(\rho_w)(\text{Volume of drift droplet}) \quad [3]$$

substituting,

$$\text{Mass of solids in drift} = (\text{TDS})(\rho_w)(4/3)\pi(D_d/2)^3 \quad [4]$$

Assuming the solids remain and coalesce after the water evaporates, the mass of solids can also be expressed as:

$$\text{Mass of solids} = (\rho_{\text{TDS}})(\text{solid particle volume}) = (\rho_{\text{TDS}})(4/3)\pi(D_p/2)^3 \quad [5]$$

Equations [4] and [5] are equivalent:

$$(\rho_{\text{TDS}})(4/3)\pi(D_p/2)^3 = (\text{TDS})(\rho_w)(4/3)\pi(D_d/2)^3 \quad [6]$$

Solving for D_p :

$$D_p = D_d [(\text{TDS})(\rho_w / \rho_{\text{TDS}})]^{1/3} \quad [7]$$

Where,

TDS is in units of ppmw

D_p = diameter of solid particle, micrometers (μm)

D_d = diameter of drift droplet, μm

Using formulas [2] – [7] and the particle size distribution test data, Table 1 can be constructed for drift from a wet cooling tower having the same characteristics as our example; 7,700 ppmw TDS and a 0.0006% drift rate. The first and last columns of this table are the particle size distribution derived from test results provided by Brentwood Industries. Using straight-line interpolation for a solid particle size 10 μm in diameter, we conclude that approximately 14.9 percent of the mass emissions are equal to or smaller than PM₁₀. The balance of the solid

particulate are particulate greater than 10 μm . Hence, PM_{10} emissions from this tower would be equal to PM emissions x 0.149, or 3.38 lb/hr x 0.149 = 0.50 lb/hr. The process is repeated in Table 2, with all parameters equal except that the TDS is 11,000 ppmw. The result is that approximately 5.11 percent are smaller at 11,000 ppm. Thus, while total PM emissions are larger by virtue of a higher TDS, overall PM_{10} emissions are actually lower, because more of the solid particles are larger than 10 μm .

Table 1. Resultant Solid Particulate Size Distribution (TDS = 7700 ppmw)

EPRI Droplet Diameter (μm)	Droplet Volume (μm^3) [2] ¹	Droplet Mass (μg) [3]	Particle Mass (Solids) (μg) [4]	Solid Particle Volume (μm^3)	Solid Particle Diameter (μm) [7]	EPRI % Mass Smaller
10	524	5.24E-04	4.03E-06	1.83	1.518	0.000
20	4189	4.19E-03	3.23E-05	14.66	3.037	0.196
30	14137	1.41E-02	1.09E-04	49.48	4.555	0.226
40	33510	3.35E-02	2.58E-04	117.29	6.073	0.514
50	65450	6.54E-02	5.04E-04	229.07	7.591	1.816
60	113097	1.13E-01	8.71E-04	395.84	9.110	5.702
70	179594	1.80E-01	1.38E-03	628.58	10.628	21.348
90	381704	3.82E-01	2.94E-03	1335.96	13.665	49.812
110	696910	6.97E-01	5.37E-03	2439.18	16.701	70.509
130	1150347	1.15E+00	8.86E-03	4026.21	19.738	82.023
150	1767146	1.77E+00	1.36E-02	6185.01	22.774	88.012
180	3053628	3.05E+00	2.35E-02	10687.70	27.329	91.032
210	4849048	4.85E+00	3.73E-02	16971.67	31.884	92.468
240	7238229	7.24E+00	5.57E-02	25333.80	36.439	94.091
270	10305995	1.03E+01	7.94E-02	36070.98	40.994	94.689
300	14137167	1.41E+01	1.09E-01	49480.08	45.549	96.288
350	22449298	2.24E+01	1.73E-01	78572.54	53.140	97.011
400	33510322	3.35E+01	2.58E-01	117286.13	60.732	98.340
450	47712938	4.77E+01	3.67E-01	166995.28	68.323	99.071
500	65449847	6.54E+01	5.04E-01	229074.46	75.915	99.071
600	113097336	1.13E+02	8.71E-01	395840.67	91.098	100.000

¹ Bracketed numbers refer to equation number in text.

The percentage of PM_{10} /PM was calculated for cooling tower TDS values from 1000 to 12000 ppmw and the results are plotted in Figure 1. Using these data, Figure 2 presents predicted PM_{10} emission rates for the 146,000 gpm example tower. As shown in this figure, the PM emission rate increases in a straight line as TDS increases, however, the PM_{10} emission rate increases to a maximum at around a TDS of 4000 ppmw, and then begins to decline. The reason is that at higher TDS, the drift droplets contain more solids and therefore, upon evaporation, result in larger solid particles for any given initial droplet size.

CONCLUSION

The emission factors and methodology given in EPA's AP-42¹ Chapter 13.4 *Wet Cooling Towers*, do not account for the droplet size distribution of the drift exiting the tower. This is a critical factor, as more than 85% of the mass of particulate in the drift from most cooling towers will result in solid particles larger than PM_{10} once the water has evaporated. Particles larger than PM_{10} are no longer a regulated air pollutant, because their impact on human health has been shown to be insignificant. Using reasonable, conservative assumptions and a realistic drift

droplet size distribution, a method is now available for calculating realistic PM₁₀ emission rates from wet mechanical draft cooling towers equipped with modern, high-efficiency drift eliminators and operating at medium to high levels of TDS in the circulating water.

Table 2. Resultant Solid Particulate Size Distribution (TDS = 11000 ppmw)

EPRI Droplet Diameter (μm)	Droplet Volume (μm^3) [2] ¹	Droplet Mass (μg) [3]	Particle Mass (Solids) (μg) [4]	Solid Particle Volume (μm^3)	Solid Particle Diameter (μm) [7]	EPRI % Mass Smaller
10	524	5.24E-04	5.76E-06	2.62	1.710	0.000
20	4189	4.19E-03	4.61E-05	20.94	3.420	0.196
30	14137	1.41E-02	1.56E-04	70.69	5.130	0.226
40	33510	3.35E-02	3.69E-04	167.55	6.840	0.514
50	65450	6.54E-02	7.20E-04	327.25	8.550	1.816
60	113097	1.13E-01	1.24E-03	565.49	10.260	5.702
70	179594	1.80E-01	1.98E-03	897.97	11.970	21.348
90	381704	3.82E-01	4.20E-03	1908.52	15.390	49.812
110	696910	6.97E-01	7.67E-03	3484.55	18.810	70.509
130	1150347	1.15E+00	1.27E-02	5751.73	22.230	82.023
150	1767146	1.77E+00	1.94E-02	8835.73	25.650	88.012
180	3053628	3.05E+00	3.36E-02	15268.14	30.780	91.032
210	4849048	4.85E+00	5.33E-02	24245.24	35.909	92.468
240	7238229	7.24E+00	7.96E-02	36191.15	41.039	94.091
270	10305995	1.03E+01	1.13E-01	51529.97	46.169	94.689
300	14137167	1.41E+01	1.56E-01	70685.83	51.299	96.288
350	22449298	2.24E+01	2.47E-01	112246.49	59.849	97.011
400	33510322	3.35E+01	3.69E-01	167551.61	68.399	98.340
450	47712938	4.77E+01	5.25E-01	238564.69	76.949	99.071
500	65449847	6.54E+01	7.20E-01	327249.23	85.499	99.071
600	113097336	1.13E+02	1.24E+00	565486.68	102.599	100.000

Figure 1: Percentage of Drift PM that Evaporates to PM₁₀


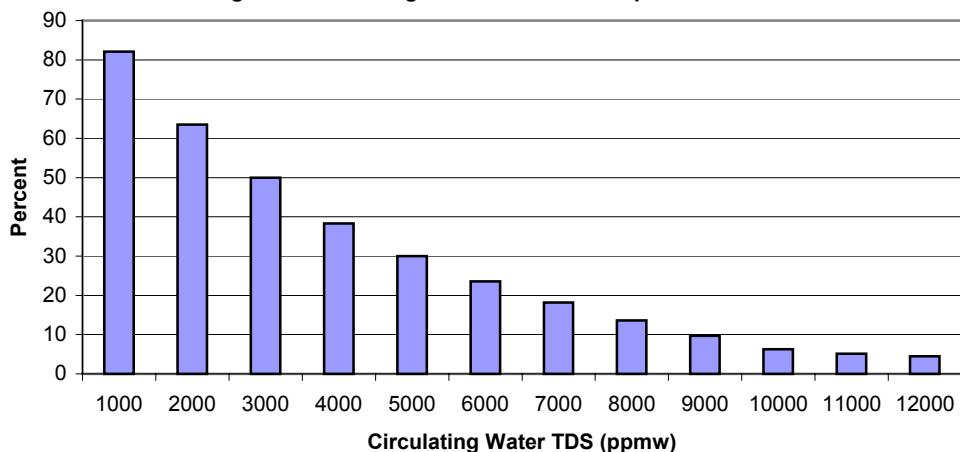


Figure 2: PM₁₀ Emission Rate vs. TDS

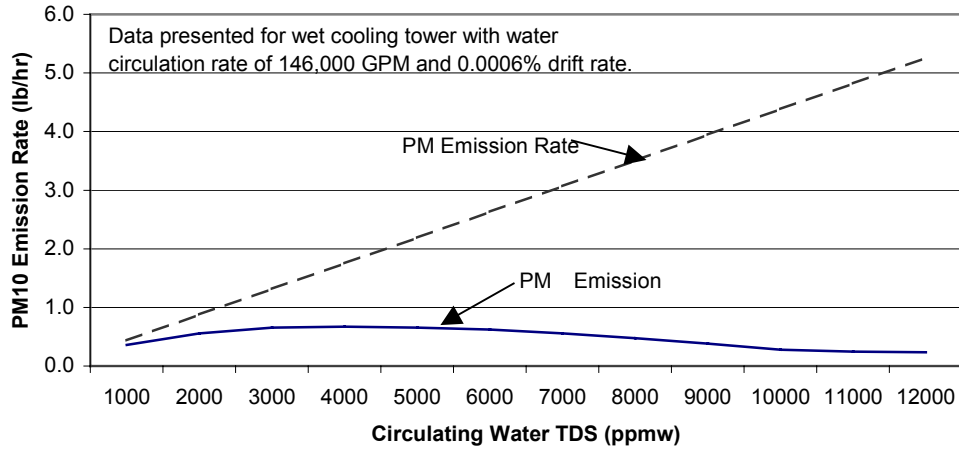

REFERENCES

1. EPA, 1995. Compilation of Air pollutant Emission Factors, AP-42 Fifth edition, Volume I: *Stationary Point and Area Sources*, Chapter 13.4 Wet Cooling Towers, <http://www.epa.gov/ttn/chief/ap42/>, United States Environmental Protection Agency, Office of Air Quality Planning and Standards, January.
2. Aull, 1999. Memorandum from R. Aull, Brentwood Industries to J. Reisman, Greystone, December 7, 1999.

KEY WORDS

Drift
Drift eliminators
Cooling tower
PM₁₀ emissions
TDS