

Can The Smart Grid Enable More DG and Does Storage Have a Role

Presented by

Jeff Berkheimer

Research & Development Project Manager

Energy Research and Development
Sacramento Municipal Utility District

CEC IEPR Committee Workshop
June 2011



SMUD

SACRAMENTO MUNICIPAL UTILITY DISTRICT


The Power To Do More.SM

Role of PV In SMUD's Future

- About 20 MW installed today, 2,000+ Installations 0.5 kW to 6 MW
- Goal of 130 MW net-metered PV by 2016
- Rolled out Feed-in Tariff January 4, 2010
 - Eligible to $\leq$ 5MW distribution interconnected renewables
 - 100 MW cap for program
 - Value based tariff; not technology cost based
 - Energy; generation, transmission and sub transmission capacity; ancillary services; avoided GHG mitigation cost; avoided natural gas price hedge values included
 - Time of day delivery multipliers
 - **Full subscribed by January 11th with PV projects!**
 - Online in 2012

Role of PV In SMUD's Future


Installed and Forecast Solar Capacity

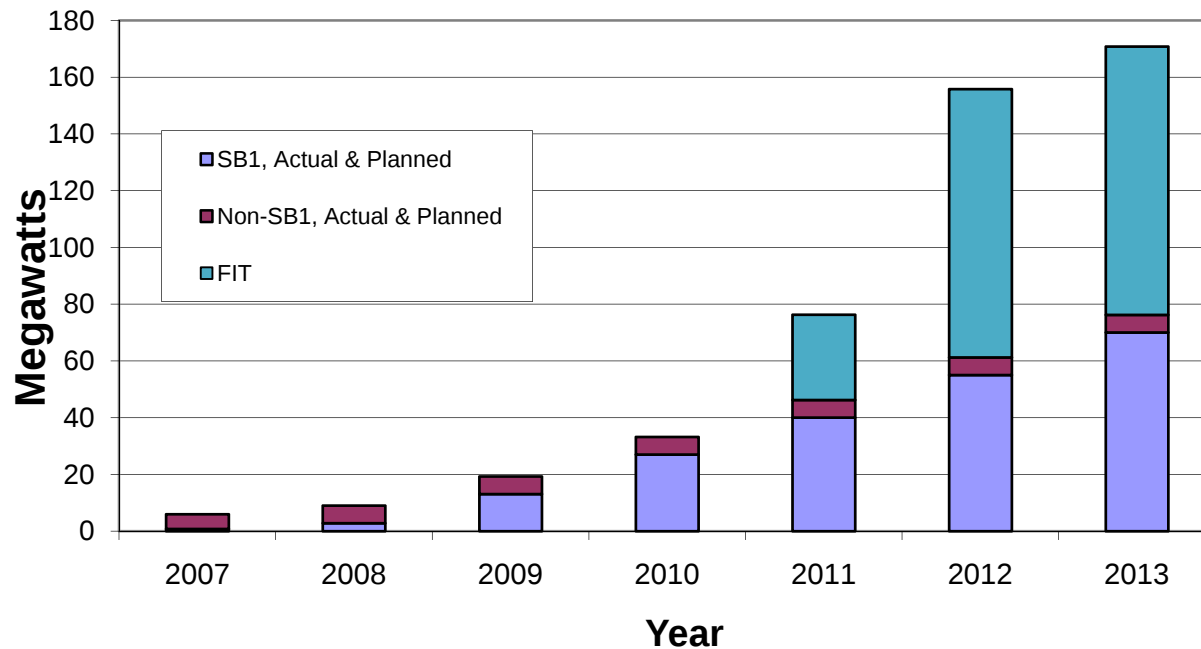


Role of PV In SMUD's Future

- SMUD is in midst of Integrated Resource Plan for 2010 – 2030
 - One scenario anticipates between 500-800 MW of local solar
- Many solar industry reports suggest grid-parity possible within 5-10 years
- Total commercial rooftop potential >1,000 MW
- Total brownfield/greenfield potential in Sacramento many times our energy needs

PV Issues For SMUD

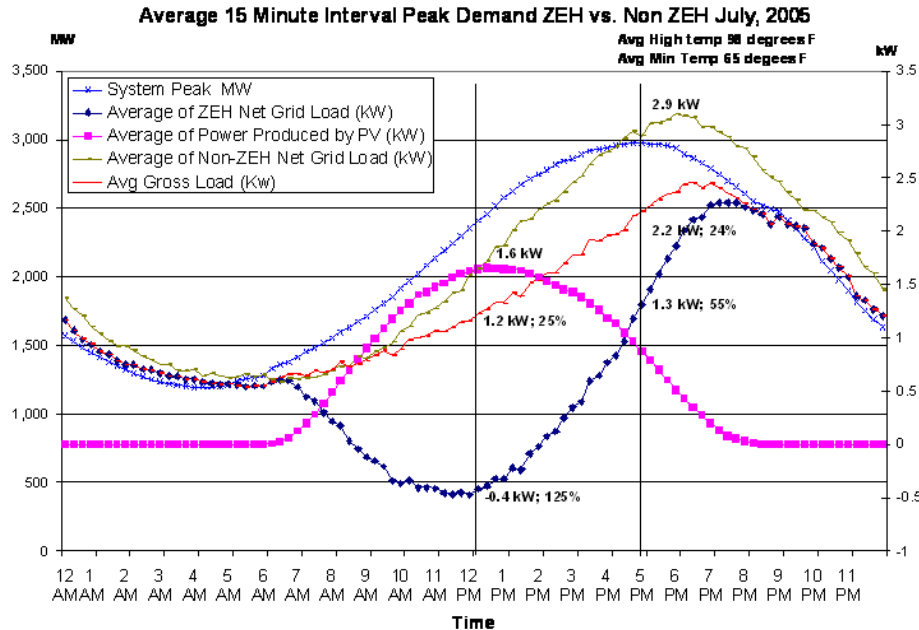


- PV coupled with high efficiency measures can reduce home peak load by 55%
- Significant shift still between solar peak and system peak
- Intermittent production resulting from partly cloudy conditions

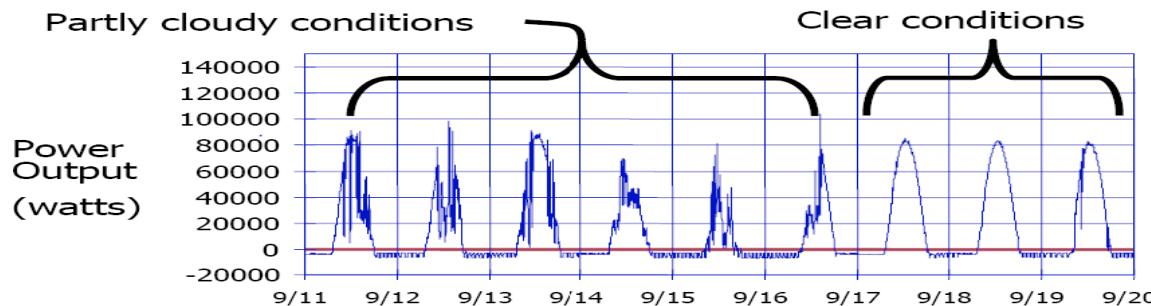


Importance of Variability

- Current expectations are that up to 50% of a large PV system output can be lost in 1 minute
- With 250 MW of PV, loss of 125 MW in 1 minute would exceed SMUD's contingency requirements
- Minute to minute load fluctuations at SMUD are much smaller ~10-20 MW
- Correlation of dispersed large systems currently not well known

Importance of Variability

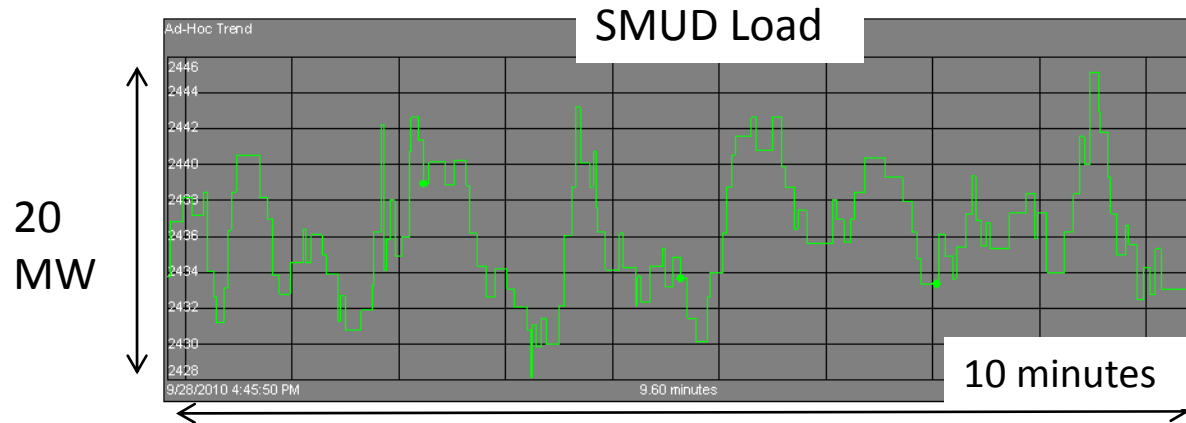

20%
Variability in
1 minute for
solar
Resource (3
site
Average)

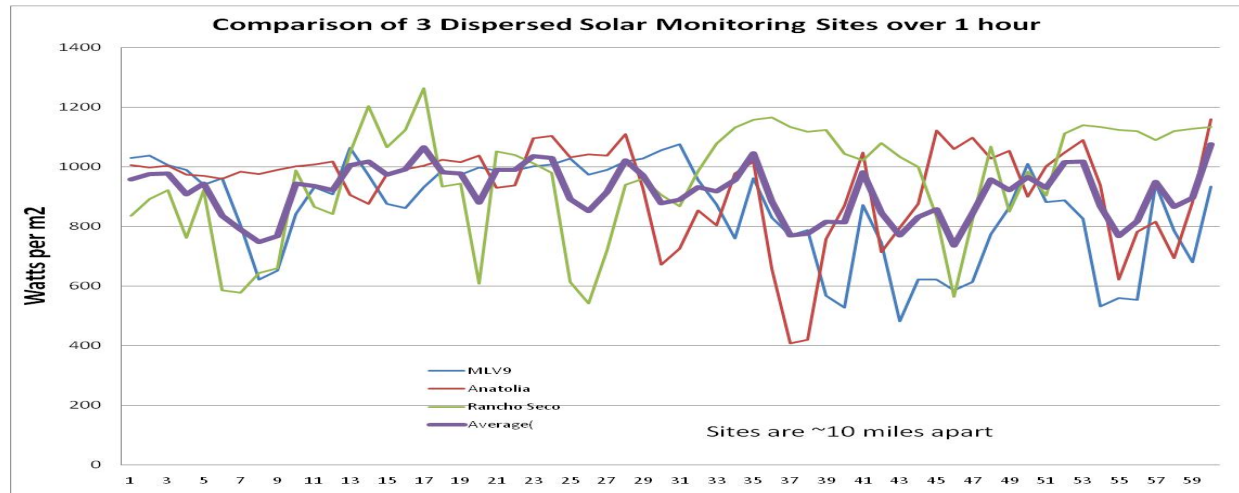

Near Term Integration Issues

Distribution System

- Evaluating impact of variable solar resource on distribution feeder voltage levels
- Validation of caps on capacity on feeders at 100% of minimum daytime load
- Identification and testing of appropriate mitigation strategies to accommodate higher penetrations on feeders (e.g., curtailment via SmartGrid, storage)
- Identification of priority areas and limits for PV on our distribution system


Medium-Term Integration Issues – Bulk Power System

- Evaluation of variability impacts on regulation requirements
- Evaluation of forecasting error impacts on ancillary services requirements and associated costs
- Redesign of distribution system as a supply source to bulk power system


SMUD PV & Smart Grid Pilot at Anatolia

ARRA FOA 85 High Penetration Solar Development (DOE Award DE-EE0002066)

Residential Energy Storage (RES) Group: Grid Tied with Battery Storage

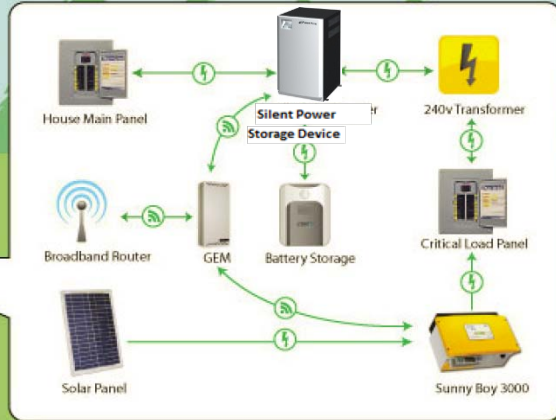

Community Energy Storage (CES) Group: Grid Tied with Battery Storage

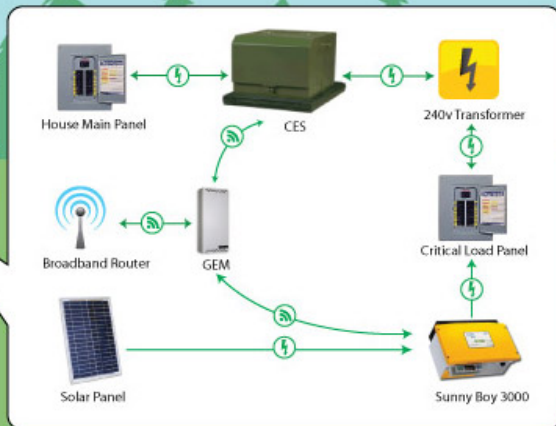


- **Anatolia SolarSmartSM Homes Community**

- High building efficiency measures
- 2kW PV systems
- Installing 15 RES (10kW/8.8kWh) and 3 CES (30kW/30kWh)
- Will firm renewables, reduce peak load and improve reliability
- Partners include GridPoint, SunPower, Navigant, NREL, SAFT (lithium ion)
- Installing utility and customer portals to monitor PV, storage, customer load
- Sending price signals to affect changes in customer usage
- Quantifying costs and benefits of this storage deployment to gain insights to broader application for SMUD

SMUD PV & Smart Grid Pilot at Anatolia (Cont'd)


Inverter Communications

- Demonstrate inverter monitoring via AMI communication from smart meter to inverter
- Demonstrate receiving data, querying for faults, sending control signals
- Utilized as actively controlled contributors versus passive devices on the grid

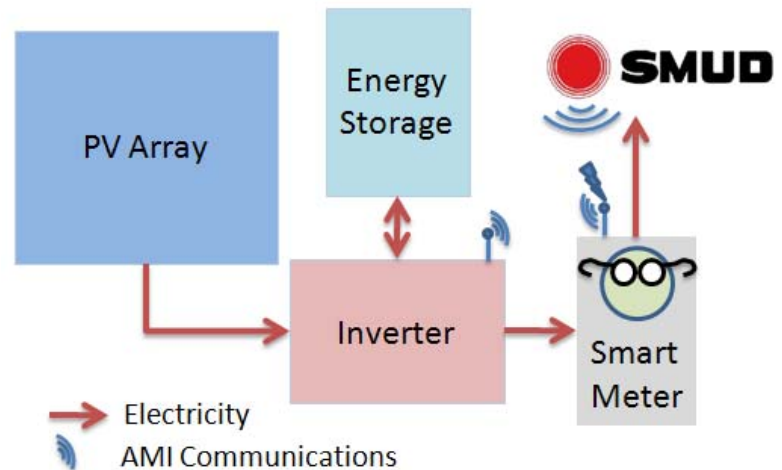

Storage for Grid Support

ARRA FOA 36 Storage Demonstrations (DOE Award DE-OE0000224)

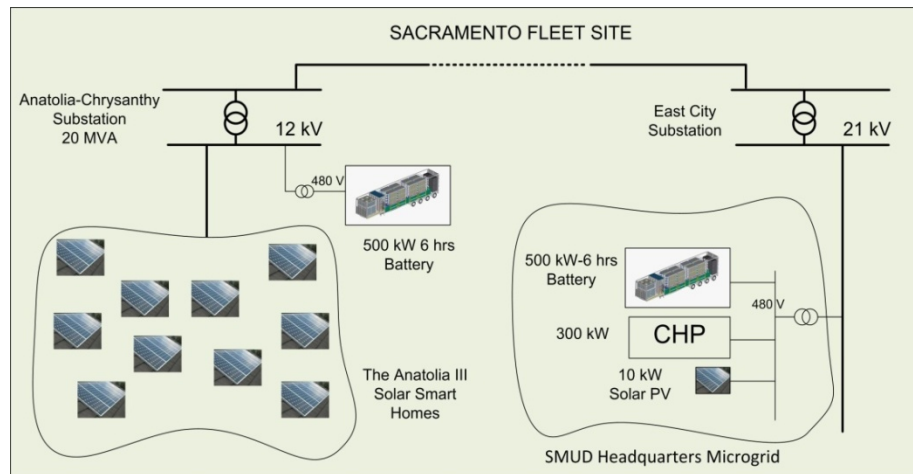

Benefit	Metric	Sacramento Fleet
Peak load reduction	Peak Load	5-10%
T&D loss reduction	T&D Losses	2%
Reduced cost of power interruption	CAIDI/SAIDI/SAIFI improvements	10%
Reduced damages as a result of lower GHG/carbon emissions	MWh served by renewable sources	TBD
Reduced cost to serve peak energy (energy arbitrage)	Hourly marginal cost data	70%

- Installing two Premium Power 500kW/6 hours zinc bromine flow batteries systems
- Partners include Premium Power, National Grid, SAIC, NREL, Syracuse University
- Will firm renewables, reduce peak load and cost to serve peak, and improve reliability
- Operating as a fleet of distribution assets
- Quantifying costs and benefits of this storage deployment to gain insights to broader application for SMUD



Sacramento Solar Highways

- 1.4MW of PV and CPV at two sites within US 50 corridor
- Project in planning stage
- Two phases of feasibility study complete
- Environmental study is underway



- Large number of technical and safety criteria
- Initial site survey resulted in East Sacramento and Rancho Cordova site selection

Sacramento Solar Highways Augmentation

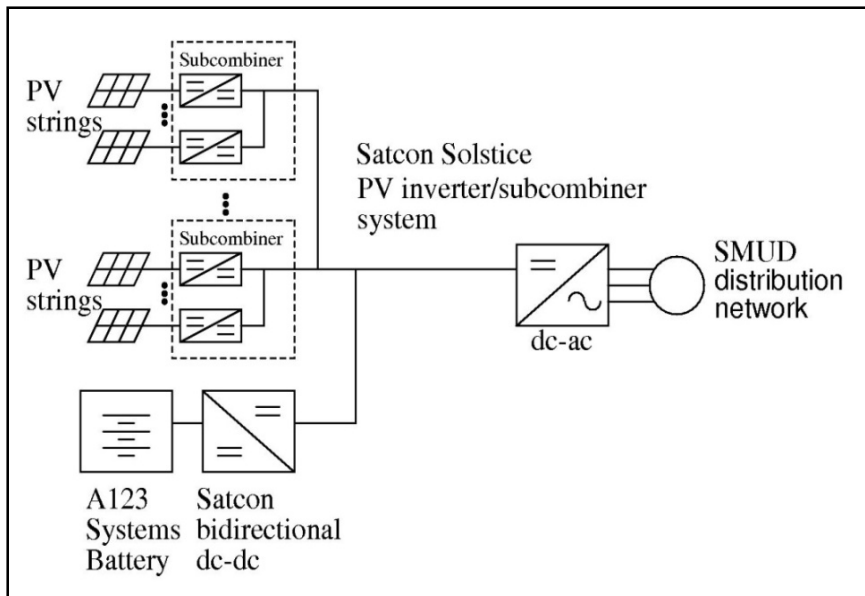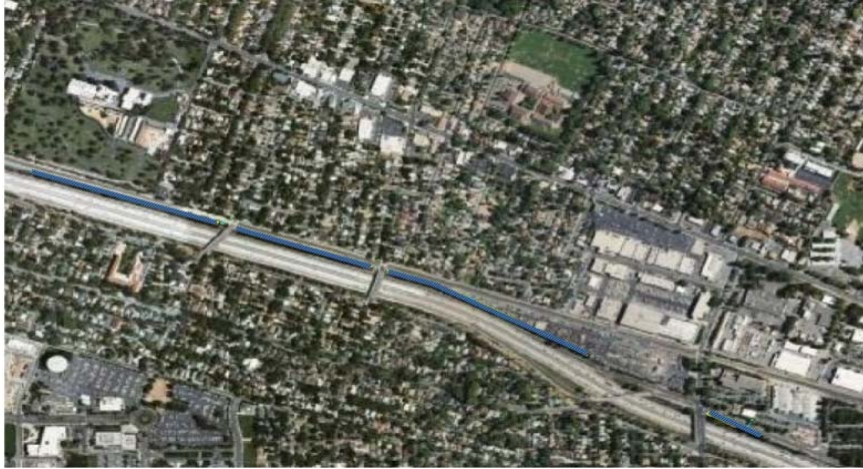

- New grant to add advanced technology
- \$4.2M grant from CEC PIER
- SMUD is subcontractor to Satcon; A123 is other partner
- Advanced technologies:
 - Satcon 500kW Solstice advanced inverter technology
 - A123 500kW/500kWh lithium ion battery system
- Objectives
 - 5-12% improved solar harvest
 - Minimize impact of variability
 - Control ramp rates
 - Voltage regulation and voltage sag mitigation
 - Peak load shifting

Additional Inverter Functionality Being Considered for Future Demonstrations

- Automatic Voltage Control technologies to possibly mitigate voltage fluctuations caused by PV intermittency in high penetration circuits
- Voltage Sag/Swell Ride-through
- Over/Under Frequency Ride-through
- Dynamic VAR Support