DOCKETED	
Docket Number:	09-AFC-05C
Project Title:	Abengoa Mojave Compliance
TN #:	254940
Document Title:	Atlantica Comments - 6-Mojave Solar Project 2023 Annual Compliance Report
Description:	N/A
Filer:	System
Organization:	Atlantica/Mahnaz Ghamati
Submitter Role:	Applicant Representative
Submission Date:	3/8/2024 2:41:30 PM
Docketed Date:	3/8/2024

Comment Received From: Mahnaz Ghamati

Submitted On: 3/8/2024 Docket Number: 09-AFC-05C

6-Mojave Solar Project 2023 Annual Compliance Report (09-AFC-5C)

Additional submitted attachment is included below.

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**

Version: 07



facility Name	Mojave So Mojave So 42134 Harpe				Alpha and	i Beta plant	•		CORS III Pacifity I Status	Draft	
					Quantities		Annual Waste	Federal Hasard		Hazardous Component (For mixture only)	
OT Code/Fire Ray, C		Common Name	Dist	Max. Bully	largest Cont.	Aug. Sarly	Amount	Categories	Component Name	5 W1	EHS CAS No.
DOT: 4.1 - Flammab	le Solids	Silicon CAS No. 7440-21-3 Map: U003 and U004	Gallon: Sente Liquid Type Pure	s 36.7 Sterage Container Box Days on Site: 365		76.7 Pressive Ambient Imperature Ambient	Harris Louis	- Physical Fiarnmable - Physical Physical - Physical Corrosive To Metal - Health Acute Toxicity - Health Reproductive Toxicity - Health Skin Cocrosion Irrifation - Health Respiratory Skin Sensifusation - Health	Silican	99%	7440-21-3
007: 8 - Corrosives iolids) Combustible Liquid		Sodium carbonate EAS No. 497-19-8 Map: L003 and L004	Pound: Solid Type Pure	Storage Container Sile Days on Site: 365		10000 Frestor Ambient Temperature Ambient	Waste Code				
DOT: 8 - Corrosives Solids) Toxic	(Liquids and	Titration Cartridge EDTA CAS No. 64-02-8 Map: L003 and L004 Grid: F5, H9	Pound: Solid Type Mature	Storage Container Bag Days on Site: 365	0.001	0.3 France Ambient Temperature Ambient	Wasta Code		EDTA, TETRASODIUM	100%	8013-51-2
DOT: 9 - Misc. Hara Materials Combustible Liquid		VP1 Heat Transfer Fluid (HTF) (A5 Ma 92-52-4 Map: L003 and L004 Grid: Item# 3 and 6	Gallon: State Liquid Type Mixture	S 2292000 Storage Container Aboveground Tank, Days on Site: 365	57000 Other	2292000 Pressure > Ambient Temperature > Ambient	Warte Code	2	Biphenyl		

586 Page **24** of **39**

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**

Version: **07**



CRS Rusiness/Drg. Mojave Sc Socility Name Mojave Sc	olar LLC			Alpha and	Beta powe	er blocks		COM ID 1045325 Facility III FA00146		
42134 Harpe	r Lake Rd, Hinkley 92347							Status Draft		
				Quantities		Annual	Federal Hazard	Hazardeus Cor (For militar		
OT Code/Fire Has. Class	Common Name	Dink	Max. Daily	Largest Cort.	Avg. Daily	Amount	Cartegories	Component Name	% Wit	DHS CAS No.
OT: 8 - Corrosives (Liquids and	Amine - Ammonia	Pounds	The second second second	200	100			Cyclohexylamine	40%	108-91-8
olidu)	33 till to Carroll	State	Storage Container		Pressure					
	208-91-8 √ DIS		Tank Inside Building		Ambient	Waste Code		MORPHOLINE	13%	110-91-8
	Map: 1003 and 1004 Grid: D29 a and 8	Type			Temperature			MONOETHANOLAMINE	13%	141-43-5
	map toos and toos time bay a and a		Days on Site: 365		Ambient	-		N-9 OCTADECENYL	13%	7173-62-8
	2.777						PA - 1 - 1	9-OCTADECEN 1-AMINE	40%	112-90-3
OT: 3 - Flammable and	Diesel exhaust fluid - DEF	Gallons		55	440		- Physical Flammable	Urea	40%	57-13-6
Combustible Liquids	CAS No.	State.	Storage Container		Pressure	Waste Code	Flanking die			
Combustible Liquid, Class II	57-13-6		Aboveground Tank		Ambient		-			
oneuros caus, cast II	Map: 1003 and 1004	Type			Temperature					
		Misture	Days on Site: 365		> Ambient					
	Fyrquel EHC Plus	Gallons	1000	55	55	The Live State		t-buty/phenyl dighenyl phosphate	78%	56803-37-
		State	Storage Container	10-1	Pressure	Waste Code		BIS-BUTYLPHENYL Phosphate	40%	65652-41-
oxic, Combustible Liquid, Class I	CAS No. 68937-40-6		Fiber Drum		-	201011.000		tri-butylphenyl Phosphate	10%	78-33-1
	Map: L003 and L004	Type			Temperature			triphenyl phosphate	4%	115-86-6
	map: coos ano coos		Days on Site: 365		Annual Control	-				
	Glycerin	Gallons		55	220	1105000000		Glycerin	100%	54-81-5
and a	CKS No.	State.	Storage Centainer		Pressue	Waste Code				
paic	56-81-5	Liquid	Fiber Drum		Ambient					
	Map: L003 and L004	Pure	Days on Site: 365		Temperature Ambient	-				
OT: 2.1 - Flammable Gases	Hydrogen	Cu. Fee	THE OWNER WHEN PERSON NAMED IN	4698	1800		- Physical	Hydrogen Gas	100%	133-74-0
	CAS No	State.	Murage Container	1444	Pressure	Waste Code	Flammable			
lammable Gas	1313-74-0		Cylinder		Ambient	_	- Physical Gas			
	Map: L003 and L004 Grid: SW of item#7	Type.			Temperatura		Under Pressure			
	map: tales and took tales and the interior		Days on Site: 365		Ambient		- Physical			
							Explosive			
							- Physical			
	Industrial oil (gear lubricant)	Gallons	20000	55	550		Combustible Dus	dimethylsolfoxide	3%	
	0.00	Sallons	Storage Container	33	Pressur	Waste Code		- Parisione	-	
	CAS No.		Steel Drum		PAREME	Transc Code	5			
	91745-46-9	-	STATE OF BUILD							
	Map: L003 and L004	Mixture	Days on Site: 365		Temperature	- 1				
	Motor, engine, hydraulic oil	Gallons	10000	55	80	- 1	- Physical	Petroleum Hydrocarbons	100%	86290-81-
and with the Stand	EAS No.	State	Storage Container		Pressue	Waste Code	Flammable			
ombustible Liquid, Class II	Randon Santa		Steel Drum, Can, Pl	astic Bottle or	Ambient					
	Map: 1003 and L004	Mixture	Days on Site: 365		Ambient	-		Benzene	4%	71-432
OT: 2.2 - Nonflammable Gases	Nitrogen	Cu. Fee		26000	13000			Nitrogen Refrigetaed liquid	100%	7727.37-9
		State	Storage Container		Pressue	Waste Code				
	7727-37-9	Gan	Aboveground Tank		Ambient		71			
	7727-37-9 Map: L003 and L004 Grid: Rem#18	Type	College Branch Live		Temperature					
	map was and those and newsits		Days on Site: 365		Ambient					

587 Page **25** of **39**

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**

Version: 07



CERS Business/Org. Facility Name	Mojave Solar LLC Mojave Solar LLC 42134 Harper Lake Rd, Hinkley 92347			Alpha and		Facility ID FA0014607 Status Draft				
			6407 THE	Quantities		Annual Waste	Federal Historic	Hazandous Co (For mixtu	re only)	111
DOT Code/Fire Hos. C	Sass Common Name	SWIT	Man Sally	Largest Cont.	Avg. Dally	Amount	Categories	Congenent Name	15 W1	BYS CAS NO.
	O2 Scavenger (A5 No. 497-18-7	Gallons State Liquid	500 Storage Container Tank Inside Buildin	200	180 Pressue	Waste Cod	L	Carbohydrazide	10%	
	Map: L003 and L004 Grid: Item 37A	Yype Mixture	Days on Site: 365		Temperature	- 3				
	Paints	Gallon	50	50	50			General Paints	100%	
	CAS No.	Liquid	Storage Container Steel Drum, Can		Ambient	Waste Cod	_			
	Map: L003 and L004	Type Mixture	Days on Site: 365		Ambient	2:				
	Phosphate	Gallon	500	200	180			Polyphosporic acids, sodium salts	10%	
	68915-31-1	State. Liquid	Storage Container Steel Drum		Frenue	Waste Cod	<u>.</u>	and Sodium hydroxide		
	Map: L003 and L004 Grid: D29 a and 6		Days on Site: 365		Temperature	-				

		Hazardo	ous Materials	And Waste	s inventory	Matrix	Report			
ERS Business/Org. acility Name	Mojave Solar LLC Mojave Solar LLC 42134 Harper Lake Rd, Hinkley 92347			Alpha and	i Beta powe	r blocks,	solar fields	CERS ID Facility Status	10453255 ID FA0014607	
			51	Quartities		Annual Waster	Federal Hasserf		(For minture only)	0
DOT Code/Fire Mas. 1	Jaes Commun Name	UWIE	Max, Daily	Largest Cost.	Avg. Daily	Amount	Categories	Component Name	3/W(EHS CAS-No
lammable Gas	Propane CAS No. 74-98-6	Pound: State Gas	200 Storage Container Cylinder	17	5 Pressue > Ambient	Waste Cede	- Health Hazard Not Otherwise Classified	Propane	100%	
	74-98-6 Map: L003 and L004 Grid: ES, H9, E3, E		Days on Site: 365		Temperature Ambient					

ERS Business/Org. scility Name	Mojave Solar LLC Mojave Solar LLC 42134 Harper Lake Rd, Hinkley 92347			Alpha and		0.7500		CORE D 10453255 FAMILY D FA0014607 Status Orah Masardous Components		
OT Code/Fire Has. 6	lass - Common Name	Unit	Max. Dally	Quartities		Arenual Waste	Federal Hasard	(For mixture unity) Component Name % Wit DHS CAS No.		
	Solid hazardous waste CA5 No. Map: L003 and L004 Grid: North of item#6	Pounds State Solid Type Waste			aug. Daily 120 Pressur Ambient Temperature Ambient	S000 Wante Code 252	Categories	Discarded batteries, contaminated 1% chemical containers, scrap metal, oilly rags, used oil absorbent material, oil filteri, contaminated soil with oil or diesel, used activated carbon, used fluorescent builbs, broken glass or mirrors, filter-press solids.		
	Solid hazardous waste CAS to: - Map: L003 and L004 Grid: North of item#6	Pounds State Solid Trac Waste	500 Storage Container Steel Drum, Can, Fil Plastic Bottle or Aug Wagon Days on Site: 365		128 Presset Ambient Temperature Ambient	5000 Warte Cade 181		Discarded butteries, contaminated 1% themical containers, scrap metal, div rags, used oil absorbent material, oil fibers, contaminated soil with oil or diesel, used activated carbon, used fluorescent bubb, brishen glass or mirrors, filter-press solids		
	Solid hazardous waste (A5 No Map: L003 and L004 Grid: North of Itam#6	Tons Stein Solid Type Waste	10 Sterage Container Steel Drum, Can, Fil Plastic Bottle or Aug Wagon Days on Site: 365		5 Pressus Ambient Temperatura Ambient	120 Worle Code		Discarded batteries, contaminated 1% chemical containers, scrap metal, oily rags, used oil absorbern material, oil filters, contaminated soil with oil or diesel, used activated carbon, used fluorescent builbs, broken glass or mirrors, filter-press solids.		

588 Page **26** of **39**

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**

Version: 07



XXS Business/Org.	Mojave Solar LLC			Dumical las				CERS III	10453255	
scilling Name:	Mojave Solar LLC			Alpha and	Beta solid	waste-B	eta Tab, Alpha	West Facility	P FA0014607	
	42134 Harper Lake Rd, Hinkley 92347	1						Status	Draft	
				Quantities		Annual Wests	Federal Hazard		Hazardous Component (For mixture only)	•
OT Code/Tire Has. 0	Date Common Name	Unit:	Max. Daily	Largest Coet.	Avg. Daily	Amount	Categories	Component Name	YWI	EHS CAS No.
	Solid hazardous wa	ste Tons	5	10	2.5	120		Broken Mirrors	1%	
	CAS No.	State Solid	Storage Container Steel Drum, Can,	Fiber Drum,	Ambient	Waste Cod	*			
	Mag: t010 Grid: flem		Plastic Bottle or a Wagon Days on Site: 365		Ambient	-				

285 Business/Org. Satistry Name	Mojave Solar LLC Mojave Solar LLC 42134 Harper Lake Rd, Hinkley 92347			Alpha and		waste. Lo	cated in Beta	plant. Pactity to	10453255 FA0014607 Draft	
OT Code/Fire Hos. C	lass Common Name	25-45-	Max. Dally	Quantities Largest Cont.		Armuel Waste	Federal Hazard	-	(For mixture only)	EWS. CAS No.
OT CARRYTHE HALL C	Solid hazardous wa	Solid	10 Storage Container Steel Drum, Can, Plastic Bottle or a Wagon Days on Site: 365	10 Fiber Drum, ug, Tote Bin, Tan	Avg. Daily 5 Pressue Ambient 1 Temperature Ambient	60 Waste Code 352	Categorhes	Spent chemicals, used fluid, oil, and grease, e oil water segarator, us oily water from the coo	hydraulic 1% fluent from ed glycerin,	DIS CASHA

XRS Business/Org. actify Name	Mojave Solar LLC Mojave Solar LLC 42134 Harper Lake Rd, Hinkley 92347				lpha and Beta Transform			Facility IO FA0014607		
				Quantities		Annual	Federal Hazard	-	Hazardous Component (For minture only)	
OT Code/live Has.	Dass Common Name	Unit	Mex. Daily	Largest Cont.	Avg. Dally	Amount	Categories	Component Name	'WY	DVS CAS No
	Mineral oil	Gallons State St	69000 torage Container	20	34068 Pressure	Waste Cod	*			
	8042-47-5 Map: L010	Exper.	teel Drum lays on Site: 365		Temperature	3) 5)				

CERS Business/Org.	Mojave :	THE RESERVE OF THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TWO IS NAMED IN COLUMN TW		fazardo	us Materials A	Overvical Local				CERN ID	10453255 FA0014607	
accept manner	CONTRACTOR OF THE PARTY OF THE	per Lake Rd, Hinkley 92347							The second secon	Status	Draft	
					8 4	Quariffies		Annual Waster	Federal Hasard		For mixture only)	0
DOT Code/Fire Haz. 0	lans	Common Name		UWR	Max. Daily	Largest Cort.	Avg. Daily	Amount	Categories	Component Name	3: WO	DHS CAS No.
		Anionic Flocculant		Pounds State Liquid	20 Storage Container Tote Bin	5	S Pressue Ambient	Wester Cards	L	Destillates	30%	64742-47-4
		Map: L003 and L004 Grid	C37 a , D37 ft	Type Pute	Days on Site: 365		Temperature Ambient				1777	
DOT: 9 - Misc. Hazi Materials	ardous	EA1.No	C32 a , D32 ft	Gallons State Liquid Type Mixture	3460 Storage Container Tank Inside Building Days on Site: 365	2640	1000 Pressur Ambient Temperature Ambient	Waste Cade	_	Sodium Hypochlorite	13%	
DOT: 9 - Misc. Hasi Materials	irdous	Sodium Bisulfite (A5 No. 007631-90-5 Map: 1003 and 1004 Grid	C32 a , D32 K	Gallons State Liquid Type Mixture	Durage Container Tote Bin	528	50 Pressue Ambient Temperature Ambient	Waste Code	- Health Skin Corrosion Irritation - Health Aspiration Hazar	Sodium Bisuffite	38%	

589 Page **27** of **39**

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**

Version: **07**



CRS Business/Org. N	Aojave Sol	lar LLC			Chemical Line	ethana			CERS 10	10453255	
	Mojave Sol					Beta Wate	Treatme	ent Plants		FA0014607	
	THE RESERVE OF THE PARTY OF THE	Lake Rd, Hinkley 92347						0.0000000000000000000000000000000000000	Status	Draft	
		Carrie Hall Trending Page 1		1-5 10	Quantities		Annual Wante	Federal Hassed	Jeanus	Hazardisus Component (For mixture poly)	
OT Code/Fire Hax. Class		Common Name	DNR:		Largest Coet.	Avg. Daily	Amount	Categories	Companent Name	3/301	EHS CAS No.
Combustible Liquid, Cl	Tana II	Amino Acid F Reagent	Pounds	2 Storage Container Bag	0.03	1 Pressue	Waste Code				
District Digital, C		7682-57-4 Map: L003 and L004	Type	Days on Site: 365		<u>Integration</u>					
		Amino Acid Reagent	Pounds		0.03	0.3					
Combustible Liquid, Cl	Jans II	CAS No. 7683-57-4	-	Storege Container Bag		France	Waste Code				
		Map: 1003 and 1004	Minture	Days on Site: 365		Temperature					
		Antifouling CAS No Map: L003 and L004	Gallons State Liquid Type		528 Drum, Tote	Pressue Ambient Temperature Ambient	Waste Code	- Mealth Acute Toxicity - Health Skin Corrollon Irritation - Mealth Respiratory Skin Sensitization			
		CalVer 2 Calcium Indicator	Pounds	0.9	0.03	0.3		P POLICE CONTROL			
		CAS No.	State Liquid	Storage Container Plastic Bottle or Jug		Pressure	Waste Code				
		Map: L003 and L004	Type Mixture	Days on Site: 365		Sengerature					
IOT: 2.2 - Nonflamma	able Gases	Carbon Dioxide, Liquid	Gallons	68000	34000	20000					
Cryogen		CA5 No. 124-38-9	<u>State</u> Liquid	Storage Container Aboveground Tank		Ambient	Waste Code				
		Map: L003 and L004 Grid: D39 a and S	Pure	Days on Ste: 365		Ambient					
DOT: 8 - Corrosives (Li	iquids and	Caustic Soda	Gallons	THE RESERVE THE PERSON NAMED IN COLUMN 2 IS NOT THE PERSON NAMED I	528	420			Sodium Hydroxide	25%	
olids)		CAS No. 1310-73-2	State_ Liquid	Storage Container Tote Bin		Ambient	Waste Code	9	vieudinalitainen.		
orrasive		Map: L003 and L004 Grid: C32 a , D32 8	Type_ Mixture	Days on Site: 365		Ambient					
		Chemets Dissolved Oxygen Refill			0.001	0.01	AM CORRECT	,			
		CAS No. 7732-18-5		Storage Comainer Glass Bottle or Jug		Pretiue	Waste Code				
		Map: 1003 and 1004	Misture	Days on Site: 365		Temperature					
		Citric Acid	Gallons		55	80					
lammable Liquid, Cla	III I-A	CA5 No 77-92-9		Storage Container Fiber Drum		Pressue	Waste Code	2			
		Map: L003 and L004	Minhorn	Days on Site: 365		Tampersture					

590 Page **28** of **39**

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**

Version: 07



CCRS Business/Org. Facility Name	Mojave So Mojave So	lar LLC			Alpha and	d Beta Wate	r Treatm	ent Plants	CERS ID Facility II	10453255 FA0014607	
1000	42134 Harpe	Lake Rd, Hinkley 92347					seed to		Status	Draft	
					Quantities		Account Waste	Federal Nazurd		Hacardous Components (For mixture only)	
OOT Code/Fire Has. O	ant .	Common Name	UNIT:	Max. Belly	Largest Cont.	Aug. Dally	Amount	Categories	Component Name		EHS. CAS No.
		Citric Acid Reagent Solution	Gallon		0.03	80					
		CAS No	State	Starage Container		Positive	Waste Cod	0			
Flammable Liquid, (Tass I-A	77-92-9	Solid	Plastic Bottle or Jug		Ambient					
		Map: L003 and L004	Type			Temperature					
	Winds and			Days on Site: 365		Ambient					
OOT: 8 - Corresives (olids)	(individual suit	Conductivity Standard Solution	Gallons		0.05	0.5					
- Constant		CAS No.	State Liquid	Starage Container Plastic Bottle or Jug		Pressue	Waste Cod				
		Mag: 1003 and 1004	Type	Passet during ut mg		Temperature	1.000				
		map 1000 and 1004		Days on Site: 365							
OCT: 8 - Corrosives	(Liquids and	DEHA 1 Reagent	Gallon	6,6	0.22	2.2					
iolids)		(Diethylhydroxylamine)	State	Storage Container		Prentue	Waste Cod				
Combustible Liquid	Class II	CAS No	Solid	Bag		- TOO NOT	Marie Con	-			
Constitution English	Copie	56-40-6	Type			Tamperature	1				
		Map: L003 and L004	Mixture	Days on Site: 365							
OT: 8 - Corrosives	(Liquids and	DEHA 2 Reagent	Gallons	0.9	0.03	0.3					
Solids)		CAS No.	State	Storage Container		Prenium	Waste Cod				
Toxic		7697-37-2	Liquid	Glass Bottle or Jug		4000000	Marin Can	_			
		Map: 1003 and 1004	Pure	Days on Site: 365		Temperature	5				
		DPD Free Chlorine Reagent for 5	Pound	6.6	0.22	2.2					
		mL sample pk/100	State	Storage Container		Frentue	Waste Cod	1.			
		CAS No	Solid	Rag							
		7558-79-4	Type			Temperature	ė				
		Map: L003 and L004	Mixture								
OOT: 8 - Corrosives lottes)	(Liquids and	Ferric Chloride	Gallon		792	500			Ferric Chloride	40%	
onest?		CAS No	State	Storage Container		Pressure	Waste Cod				
Combustible Liquid	Class III-A,	7705-08-0	Liquid	Tote Bin		Ambient					
Toxic		Map: L003 and L004 Grid C37 a , D37 8	Misture	Days on Site: 345		Ambient					
OT: N - Corrosives	(Liquids and	FerroZine* Iron Reagent	Gallon	3.9	0.13	1.3			Acettic Acid	40%	5421-46-5
olids)		CAS No.	State.	Storage Container		Pressue			-	and and	
ambustble Liquid		5421-46-5	Liquid	Plastic Bottle or Jug		Ambient	Waste Cod	<u>.</u>	thioglycolic Acid Benzenesulfonic Acid	20%	68-11-1 69898-45-5
Combustible Liquid. Combustible Liquid.		Map: L003 and L004	Type			Tampersture			semilementationic ricid		99000-42-
Toxic, 31, Toxic, Tox			Pure	Days on Site: 365		Ambient					
combustible Liquid.											

591 Page **29** of **39**

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**

Version: 07



ZRS Business/Ovg.	Mojave So	lar LLC			Dienical Lan	diam			CORS 60	10453255	
actity Name	Mojave So	lar LLC			Alpha and	d Beta Wate	r Treatm	ent Plants	Facility 5	FA0014607	
gravitaci i	12134 Harper	Lake Rd, Hinkley 92347							Status	Draft	
,				50 3	Quartities		Annual Waste	Federal Nacord		Huxardous Components (For misture only)	
OT Code/Fire Nac. Co	44	Common Name	Unit		Largest Cont.	Avg. Dully	Amount	Cirtogories	Component Name	N WI	EHS CAS No.
		Hardness Buffer	Gallon	s 0.9	0.03	0.3					
		CAS No.	State	Starage Container		Pressue	Waste Cod	te			
		50-00-0	Liquid	Plastic Bottle or Jug							
		Map: L003 and L004	Mixture	Days on Site: 365	×.	<u>Temperature</u>	<			2007.00	ation of the state
		High Calcium Hydrated Lime	Pound	s 43400	21664	15000			Calcium Hydroxide	90%	1305-62-0
Taxic, Corrosive, Tax	OK.	CAS No.	State	Storage Container		Pressue	Waste Cod	to_	Magnezium Oxide	3%	1309-48-4
Combustible Liquid,	Class III-A, S	1305-62-0	Solid	Silo		Ambient			Crystalline Silica	2%	14808-60-7
82.47		Map: L003 and L004 Grid: C37 a , D37 8	Pure.	Days on Site: 365		Ambient					
		Magnesium Sulfate	Pound	s 170000	50000	170000			Magnesium Sulfate	99%	
		CAS No	State.	Storage Container		Pressure	Waste Cod	be .			
		14168-73-1	Solid	Silo		Ambient					
		Map: L003 and L004 Grid: C37 a , D37 fl	Misture Misture	Days on Site: 365		Ambient.					2012
		Molybdate 3 Reagent Solution	Gallon		0.03	0.3					
Cornosive, Cornosive. Toxic	Comosive,	CAS No. 7664-93-9	State Solid	Starage Container Plastic Bottle or Jug		Pressue	Waste Cod	le_			
2720		Map: L003 and L004	Type Mixture	Days on Site: 365		<u>Inmeniative</u>					
		Molybdate Reagent	Gallon	0.9	0.03	0.3					10.00
53353333		CAS No.	State	Storage Container		Pressure	Waste Cod	e .			
Corrosive		7631-95-00	Liquid	Plastic Bottle or Jug							
		Map: L003 and L004	Type Mixture	Days on Site: 365		Temperature	-				
OCT: 8 - Corrosives (Liquids and	Muriatic acid	Gallon	s 2500	1	100			water	80%	7732-18-5
Solids)		CAS No.	State	Storage Container		Frenue	Tarrison C.		Hydrogen Chloride	38%	7647-01-0
Correcive		7647-01-0	Liquid	Tank Inside Building		Ambient	Waste Cod 791	-	mydrogen Chloride	34%	7647-01-0
Corrotive		Map: L003 and L004	Pure	Days on Site: 365		Ambient	791				
OOT: 8 - Corrosives (lolids)	Liquids and	ORP Solution	Gallon		0.05	0.5					
man)		CAS No.	State	Storage Container		Pressue	Waste Cod				
		13746-66-2	Liquid	Plastic Bottle or Jug			THE CO.	in.			
		Mag: L003 and L004	Mixture	Days on Site: 365		Temperature					
OT: 8 - Corresives (Liquids and	pH Buffer Solution 10.01	Gallon	1000 E	0.13	1.3					
HOMEN!		CAS No. 50-00-0	Liquid	Plastic Bottle or Jug		Pressue	Waste Cod	le_			
		Mag: L003 and L004	Type Mixture	Days on Site: 365		Temperature					

Facility Name Mo	ave Solar LLC ave Solar LLC 4 Harper Lake Rd, Hinkley 92347			Alpha and	d Beta Wate	r Treatm	ent Plants	Facility 10. FA	0453255 A0014607	
OT Cade/Fire Has. Class	Common Name	DWR	Max. Daily	Quantities Largest Cost.	Avg. Daily	Annual Waste Amount	Federal Hecard Categories		rdoos (imponer or mixture only) % We	DIS CAS No.
OOT: II - Corrosives (Liquiolids)	CONTRACTOR OF THE CONTRACTOR O	Gallon: State Liquid Type		0.13	1.3 Freezes Temperature	Waste Cod				
OOT: 8 - Carresives (Liqui Iosies)	ds and pH Buffer Solution 7.00 CAS No. 7558-79-4 Map: L003 and L004	Gallons State Liquid Type Mixture	3.9 Storage Centalner Plastic Bottle or Jug Days on Site: 365	0.13	2.3 Pressue Temperature	Waste Cod	<u>.</u>			
OT: 8 - Corresives (Liquiolids)	ds and pH Storage Solution CA1 No. 7558-79-4 Mag: L003 and L004	Gallons State Liquid Type Mixture	3.9 Shorage Centainer Plastic Bottle or Jug Days on Site: 365	0.13	1.3 Pressure Temperature	Waste Cod	<u>.</u>			
OCT: 8 - Compsives (Liquiolids) Corrosive	ds and RO, NF Scale Inhibitor. containingOrganophosphonic Acids (AS No. Map: 1003 and 1004	Pounds State Liquid Type Mixture	1056 Storage Container Aboveground Tank Days on Site: 365	528	200 Presse Ambient Temperature Ambient	Waste Cod	<u>.</u>	Organophosphonic Acids		
201; R - Corresives (Liqu lotids) Combusible Liquid, Class	CAS No.	Pound: State Solid Type Pure	Sito Days on Site: 365	7660	7660 Pressue Ambient Temperatura Ambient	Waste Cod	<u>e.</u>	Sodium Carbonate	100%	

592 Page **30** of **39**

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**



SRS Business/Org. Facility Name	Mojave So Mojave So 42134 Harper				Alpha and	Beta Wate	r Treatme	nt Plants	CERS IO Facility Status	10453255 PA0014607 Draft	
OT Code/Fire Nas. C	Dana	Commin Name	Link	Max. Daily	Quantities Largest Cont.	Avg. Daily	Annual Waster Amount	Federal Nassed Categories	Component Name	Hazardous Components (For misture only) % Wit	DIS CAS No.
IOT: 8 - Carrosives olids) owic		Sulfuric Acid 50-91% CAS No 7864-93-9 Map: LSO3 and LSO4 Grid: C32 a and 8.	Gallons State Liquid Type Mixture	528 Statege Container Tate Bin Duys on Site: 365	528	400 Freeze Ambient Emperature Ambient	Water Code	- Physical - Physical - Physical - Physical - Physical - Meath Acube - Toxichy - Meath Acube - Toxichy - Meath Skin - Corrosion - Meath - Respiratory Skin - Sensitzation - Meath - Me	Sulfuric Acid	50%	√ 7644-93-9
OOT: 9 - Misc. Haza Vaterials Corrosive	rdous	Versene 100 (A5 No. 64-02-8 Mag: L003 and L004 Grid: F5, H9	Type	1100 Storage Container Bag Days on Site: 365	55	Pressue Ambient Sumposture Ambient	Wasta Code		Sodium EDTA		

CRS Business/Org. Facility Name	Mojave Solar Mojave Solar	uc			Alpha Che	mical Stora	ge Area		****** FA0014	7.77.2	
	42134 Harper Lak	e Rd, Hinkley 92347							Steron Oraft		
					Quantities		Annual Waste	Federal Hasard	Materileus C (Per relat		19
POT Code/Fire Ras. 0	last for	nmen Nome	Date	Max. Bally	Largest Cost.	Avg. Sally	Amount	Categories	Camponent Name	96,985	EHS CAS No.
OOT: 9 - Misc. Han Materials	The state of the s	rquel	Gallons	550 Storage Container	55	250 Pressure	0	- Physical Hazard Not Otherwise	t-Butylphenyl diphenyl phosphat	e 30%	56803-37-
aterials		100 103-37-3	Liquid	Steel Drum		Ambient	Waste Code	Classified - Health Hazard	Bisit-butylphenyl]phenyl phosphate	30%	65652-41-
			Mixture	Days on Site: 365		Ambient.	352	Not Otherwise Classified	Tri(t-butylphenyl) phosphate Triphenyl phosphate	15% 25%	78-33-1 115-86-6

				us Materials A	STATE OF TAXABLE PARTY.			Control of the last of the las			
ZRS Business/Org. actify Name	Mojave : Mojave : 42134 Harr				Alpha pla				CERS ID Facility I Status	10453255 FA0014607 Draft	
				6	Quartities		Arenasi Wante	Federal Hasard		Hazardinus Componento (For mixture serly)	
OT Code/Fire Haz. 1	less.	Common Name	Unit	Man Delly	Largest Cons.	Avg. Daily	Amount	Categories	Component Name	NWI.	THS CAS No.
IOT: 3 - Flammabi ombustible Liquid tammable Liquid,		Gasoline CAS No. 8006-61-9 Map: 1003 Grid: 829	Liquid Type	2000 Storage Container Aboveground Tank Days on Site: 365	2000	250 Pressur Ambient Temperature Ambient	Waute Code	- Health Carcinogenicity - Health Acute Toxicity - Health Reproductive Toxicity	Unleaded Gasoline	100%	8006-61-5

Facility Name M	fojave Solar LLC fojave Solar LLC 2134 Harper Lake Rd, Hinkley 92347			Alpha&B	eta Cooling 1	lower		facility 10 FA00	3255 14607	
	Common Name	Unit	Mus. Dully	Quantities		Annual Waste	Federal Masand	[For m	s Component lature only)	EHS CAS No.
KOT Code/Fire Hac, Class	CL5428 CAS No	Gallons litets Liquid Type		500 lic Drum	500 Fresse Temperature	0 Weste Code	Catagories	Components not listed are eit non hazardous or in concentro of less than 1%		IIIs CASHE
DOT: 7 - Radioactive N	daterial CT790 CA3 No.	Liquid Esse	1000 Storage Container Plastic/Non-metal Days on Site: 365	500 lic Orum	500 Pressue Tempetature	0 Waste Code 132	- Health Acute Toxicity - Health Skin Corrosion Irritation - Health Serious Eye Damage Eye Irritation	Phosphoric Acid ZINC OXIDE Other components below reportable levels	40% 20% 40%	766-38-2 1314-13-

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**



CERS Business/Cirg. Facility Name	Mojave So 42134 Harpe				Alpha&B	eta Power Bi	lock		CORS ID 1045325 Facility ID FA00146 Status Draft	Maria and	
IOT Code/Tive Haz. (Same	Common Name	Unit	Max. Daily	Quartitles Largest Cont.	Avg. Daily	Armael Waste Amount	Federal Nasard Catagories	Hazardous Co (For mixtur Component Name		INS CAS No.
OT: 8 - Cortosives (t		BL1260 CAS No	Gallons itate Liquid Type	500 Storage Container Plastic/Non-metalic Days on Site: 365	500	500 Frense Imperatore	0 Weste Code 341	- Health Skin Corrosion Irritation - Health Respiratory Skin Sensitization	Carbohydrazide Other components below reportable levels	20% 80%	497-18-7
001: 8 - Corrosives Solids)	(Liquids and	BL1794 CAL No	Type_	500 Storage Container Plantic/Non-metalic Days on Site: 365	500 Drum	500 Pressur Ambient Temperature Ambient	0 Weste Code 123	- Health Skin Corrosion	Trisodium phosphate Other components below reportable levels	5% 95%	7601-54-9
		BL8411 CAS No. FHS	Liquid	9000 Istarage Container Plastic/Non-metalic Days on Site: 365	9000 Drum	9000 Pressure Ambient Temperature Ambient	0 Waste Cede 341	- Physical Flammable - Health Acute Toxicity - Health Skin Corrosion Itritation - Health Serious Eye Damage Eye Pritation	cyclohexanamine Ethanolamine Ethanolamine Amines, tallow alkyl, ethoxylated N°-{(Z)-octadec-9-enyl propane- 1,3-diamine Other components below reportable levels	30% 20% 3% 3% 60%	√ 108-91-8 √ 141-43-5 63791-26-2 7173-62-8

facility Name	Mojave So Mojave So 42134 Harper			}	Alpha&Be	eta Water Tr	eatment i	Plant	Facility ID FA00146 Status Ovalt	Water .	
					Quantities		Annual Waste	Federal Nasiant	Hazardeus Con (For mixture	renty)	
DOT Code/Fire Has. Cl	lares	P813E CAS No	Gallons State Liquid Type Pure		Largest Cont.	Seg Cally 5 Pressed Ambient Temperature Ambient	O Wavis Code	Categories - Health Acute Toxicity - Health Serious Eye Damage Eye Irritation	Component Name Distillates (getroleum), Hydrotreated Light Alcohols, C10-16, Ethoxylated Alcohols, C12-14, Ethoxylated Alcohols, C12-15-ethoxylated Other components below reportable lewis	30% 3% 3% 3% 3% 70%	64742-47-8 64742-47-8 68002-97-1 68439-50-5 68551-12-2
DOT: 8 - Corrosives lolids) Corrosive	(tiquids and	RL100 CAS No.	Gallons State Equid Type Mixture	2000 Storage Container PlasSc/Non-metalic Days on Site: 365	55 Drum	S00 Pressure Ambient Yemperature Ambient	Ø Warte Code	- Health Acute Toxicity - Health Respiratory Skin Sensitization - Health Serious Eye Damage Eye Irritation - Health Assiration Hazard			
DOT: 8 - Controllers Solids) Cornolive	(Liquids and	RL100 CAN Ma	Gallons State Liquid Type Mixture	2000 Storage Centainer Plastic/Non-metalic Days on Site: 365	55 Drum	500 Pressue Temperature	0 Waste Code 122	- Health Acute Toxicity	Ethylene diamine tetracertic acid, tetrasodium salt Sodium Nydroxide Nitrilotriacertic acid, trisodium salt	2%	64-02-8 1310-73-2 5064-31-3
		RL2000 CA3 No.	Terr	2000 Storage Container Plastic/Non-metalic Days on Site: 365	55 Drum	500 Presson Temperature	Waste Code 343	- Health Acute	Citric Acid Sodium Citrate	30% 7%	77-92-9 68-04-2
OCT: 8 - Corresives wollds) Corresive	(Siquids and	RL2032 (A) No.	Gallons State Liquid Type	THE RESIDENCE OF THE PERSON NAMED IN	55 Drum	500 Pressue Temperature	0 Waste Code	- Health Skin Corrosion Irritation - Health Serious Eye Dumage Eye Irritation	Phosphoric Acid	10%	7664-38-2
OT: 8 - Corresives olids) Corresive	(tiquids and	RL3400 (A3 No.	Gallons tapus Liquid Tupe Mixture	1056 Marage Container Tone Bin Days on Site: 365	528	S00 Pressure Temperature	Waste Code	- Physical Corrosive To	Sodium hydroxide Other components below reportable levels	97%	1310-73-2

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**

Version: 07



CERS Business/Org. Facility Name	Mojave So Mojave So 42134 Harpe				Alpha&Be	eta Water Ti	reatment l	Plant		53255 014607	
			552		Quantities		Annual Wester	Federal Hazard		us Components mistore only)	9
DOT Code/Fire Has. 0	Zaso	Common Name	Unit	Mox. Duity	Largest Coot.	Avg. Daily	Arrount	Categories	Component Nume	W W	DHS CAS No.
OT Code/Fire Has. Cla OCT: B - Corrosives () olids)	(Liquids and	RL9009 CAS No.	Liquid	1000 Storage Container Plastic/Non-metal	500 lic Drum	500 Pressue Temperature	Waste Code	- PACE STATE OF THE PACE OF TH	2-Butenedioic acid (2) -,homopolymer 2-phosphonobutane-1,2,4- tricarboxylic Acid	10%	37971-36-1
			Tops.			100000000000000000000000000000000000000	343	Metal - Health Skin Corresion Initiation	Dierhylenetriaminepenta (methylenePhosphonic Acid) Sodium Salt Other components below reportable levels	10% 80%	22042-96-

CERS Bissiness/Org. Facility Name	Mojave Solar LLC Mojave Solar LLC 42134 Harper Lake Rd, Hinkley 92347			Water Tre	eatment Plan	nt		Facility ID FA001		
			1	Quartities	- 1	Annual Waster	Federal Hasard	Hazardous C (For mixt		0
DOT Code/Fire Mas. 0	Dass Common Name	Unit	Max. Daily	Largest Cost.	Avg. Daily	Amount	Categories	Component Name	30WH	EHS CAS No.
DOT: 9 - Misc. Hazi Materials Corrosive	AWC C-209 RO NF Membra cleaner CAS No. 5329-14-6	Solid Type	Storage Container Plastic/Non-metalic	5 Drum	100 Pressue Ambient Temperature	Watte Code 214	- Health Respiratory Skin Sensitization	Amido Sulfonic Acid Fluoride Salts	10%	5329-14-4 7681-49-4
	Map: L003 and L006	Mixture	Days on Site: 365		Ambient					
DOT: 9 - Misc. Has Materials	AWC C-227 RO NF Membra cleaner	Pound:	1200 Storage Container	5	100 Pressur	5	- Health Respiratory Skin	Sodium Carbonate Peroxyhydra		15630-4
Texic	CAS No. 15630-49-4 Mag: L003 and L005	Liquid Type	Plastic/Non-metalic Days on Site: 365	Drum	Ambient Temperature Ambient	214	Sensitization	Sodium Carbonate Propietary Blend	40%	497-19-8 N/A

595 Page **33** of **39**

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**

Version: 07



8.2 Annex 2

General Layout Map for the site and for the Power Blocks and Evacuation Routes and Assembly Areas Map.

Extinguisher location Map.

Spill kit locations Map.


Safety Shower Location Map.

Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**



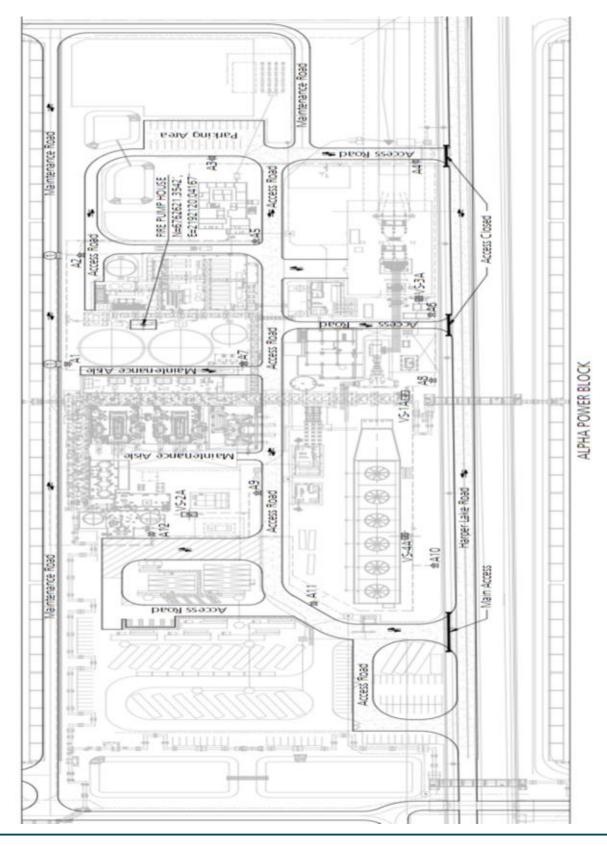


Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**



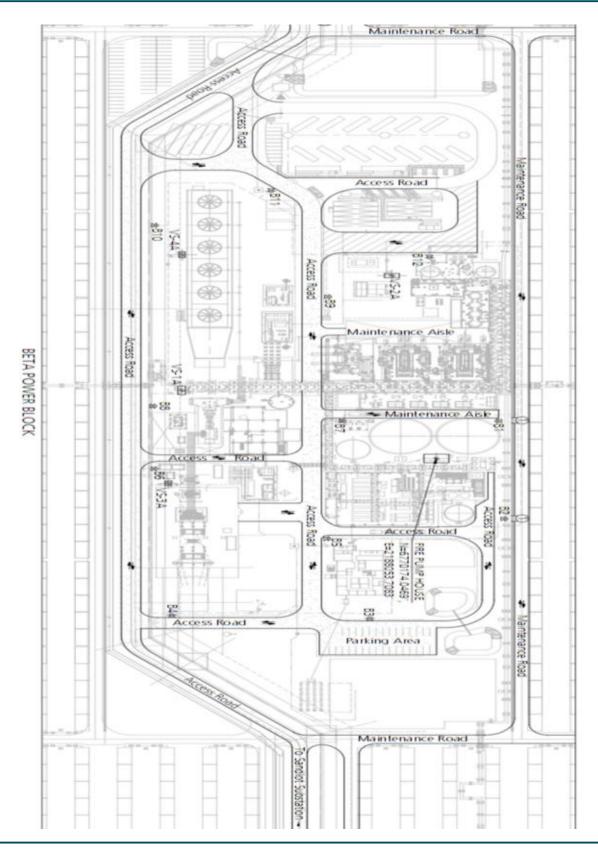


Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**



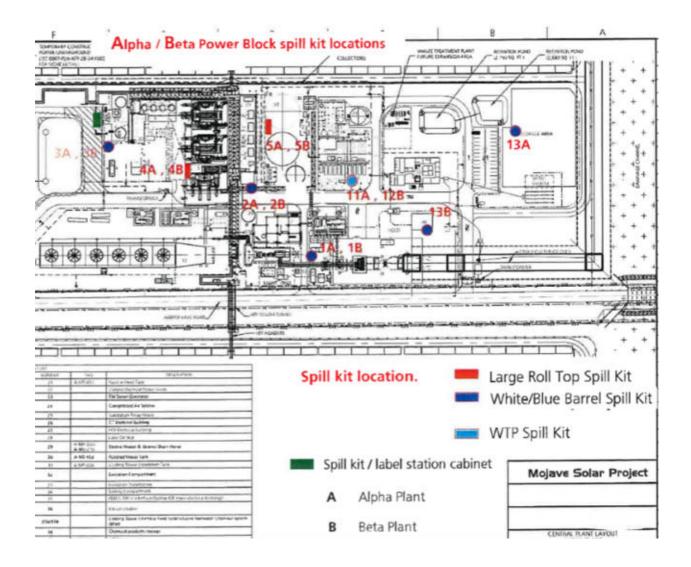


Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**



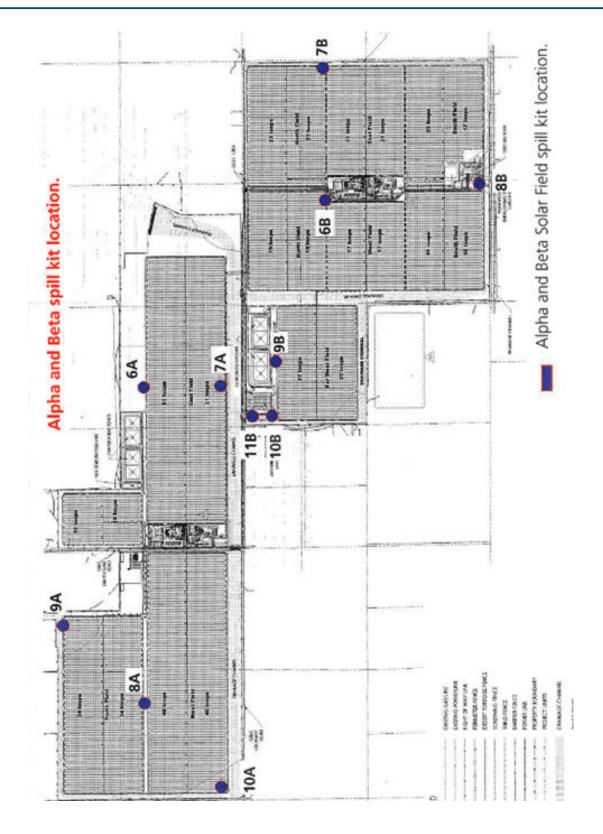


Emergency Plan. Hazardous Material Plan (HMBP)

HAZ-2

Date: **01/17/2024**



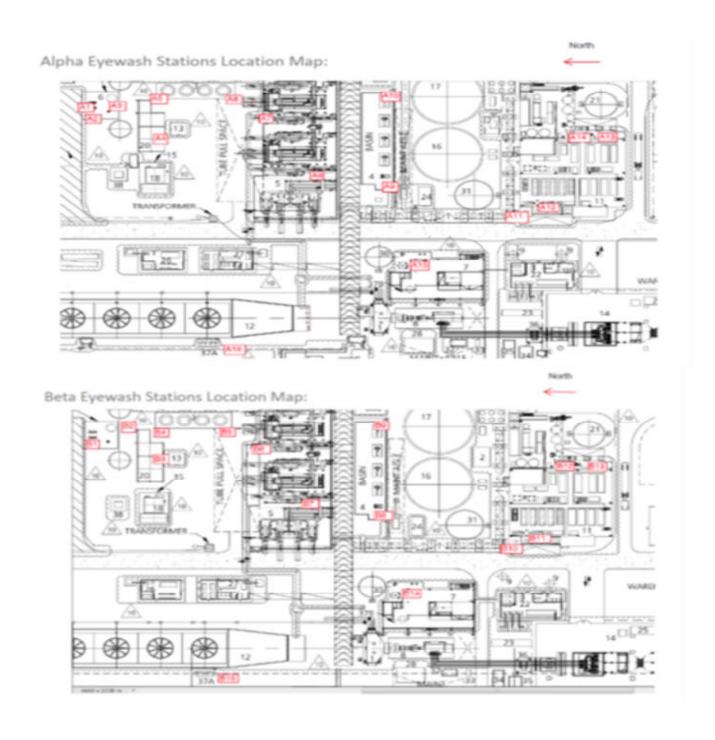





Spill Prevention, Control, And Countermeasures (SPCC) Plan, Rev 06

P	Ρ.	-(O(8)	Syl	VI	- [VI	J١	/-	-0	0	6																											
•		-		•	•		•		•		•		•		•		•		_		•		•		•		•		-	_		•		_		•		•	
	•		•	•		•		•		•		•		•		•		•		•		•		•		•		•		•	_		•		•		•	•	
•		•		•	•		•		•		•		•		•		•		•		•		•		•		•		•			•		•		•		•	
	•		•	•		•		•		•		•		•		•		•		•		•		•		•		•		•	_		•		•		•	•	
•		•		•	•		•		•		•		•		•		•		•		•		•		•		•		•	_		•		•		•		•	
	•		•	•		•		•		•		•		•		•		•		•		•		•		•		_	4		_		•		•		•	•	
•		•		•	•		•		•		•		•		•		•		•		•		•		•		•		•	4		•		•		•		•	4
	•		•	•		•		•		•		•		•		•		•		•		•		•		•		•			_		•		•		•	•	
•		•		•	•		•		•		•		•		•		•		•		•		•		•		•		•	•		•		•		•		•	
	•		•	•		•		•		•		•		•		•		•		•		•		•		•		•		•	•		•		•		•	•	
•		•		•	•		•		•		•		•		•		•		•		•		•		•		•		•	4		•		•		•		•	4
	•		•	•		•		•		•		•		•		_		•		•		•		•		•		•		•	•		•		•		•	•	
•		•		•	•		•		•		•		•		•		•		•		•		•		•		•		•	4		•		•		•		•	
	•		•	•		•		•		•		•		•		•		•		•		•		•		•		_	4	•	•		•		•		•	•	
•		•		•	•		•		•		•		•		•		•		•		•		•		•		•		•	4		•		•		•		•	4
	•		•	•		•		•		•		•		•		•		•		•		•		•		•		•		•	•		•		•		•	•	
•		•		•	•		•		•		•		•		•		•		•		•		•		•		•		•	4		•		•		•		•	
	•		•	•		•		•		•		•		•		•		•		•		•		•		•		•		•	•		•		•		•	•	
							•				_		_		•		•		•				•		_											•		•	





Revision	Date	Reason for Revision
00	09/16/2013	Initial Release
01	10/07/2013	Agency Comments
02	02/27/2014	To address San Bernardino Fire Department concerns
03	06/17/2021	Updated Formatting, Font Header and ASI Logo
04	05/19/2022	Updated certification page signed by current Plant Manager
05	01/20/2023	Updated the signatures and appendixes.
06	01/17/2024	Chemical inventory updated

Produced by:	Department	Date
Nicholas Diercks	Environmental Technician	Electronic Signature
Fred Hrenchir	Safety Services Lead	Electronic Signature
Steven Pochmara	Q&E Compliance Manager	Electronic Signature

Reviewed by:	Department	Date
Mahnaz Ghamati	Q&E Compliance Manager	01/17/2024

Approved by:	Department	Date
David Rosas	Plant Manager	01/17/2024



Date: **01/17/2024**

Version: 06

Contents

1	I١	NTRODUCTION	10
	1.1	Facility Description	10
	1.2	Plan Purpose/Objectives	12
	1.3	Plan Distribution Procedures	13
2	S	PCC PLAN REGULATION OVERVIEW	13
	2.1	APPLICABILITY (§112.1)	13
	2.2	DEFINITIONS (§112.2)	14
	2.3	REQUIREMENT TO PREPARE AND IMPLEMENT (§112.3)	15
	2.4	AMENDMENT OF SPCC BY REGIONAL ADMINISTRATOR (§112.4)	16
	2.5	AMENDMENT OF SPCC BY OWNERS AND OPERATORS (§112.5)	17
	2.6	QUALIFIED FACILITY PLAN REQUIREMENTS (§112.6)	19
3	§	112.7 GENERAL REQUIREMENTS FOR SPCC PLANS	19
	3.1	GENERAL REQUIREMENTS (§112.7(a))	19
	3.2	Rate, Quantity and Direction of RELEASE (§112.7(b))	27
	3.3	Secondary Containment / Diversionary Structures (§112.7(c))	28
	3.4	Contingency Planning (§112.7(d))	29
	3.5	Inspections, Testing, and Records (§112.7(e))	30
	3.6	Personnel, Training, and Discharge Prevention (§112.7(f))	31
	3.7	Security (§112.7(g))	31
	3.8	TANK CAR AND TANK TRUCK LOADING/UNLOADING RACK (§112.7(h))	32
	3.9	Brittle Fracture Evaluation (§112.7(i))	32
	3.10	Conformance with Other Applicable Regulations (§112.7(j))	32
	3.11	Qualified Oil-filled Operational Equipment (§112.7(k))	32
4	§	112.8 SPCC Plan Requirements for Onshore Facilities	33
	4.1	General Requirements (§112.8(a))	33
	4.2	Facility Drainage (§112.8(b))	33
	4.3	Bulk Storage Containers (§112.8(c))	33
	4.4	Facility Transfer Operations (§112.8(d)) (§112.12(d)) (Aboveground Valves,	
	-	ng Association with Transfer Operations)	
5	Α	ppendix	37



Date: **01/17/2024**

	CERTIFICATION PAGE		
	Facility Information		
	Name of Facility: Mojave Solar Project		
	Type of Facility: Solar Power Plant		
	Location of Facility: 42134 Harper Lake Road; Hinkley, California		
	Owner/Operator: Mojave Solar LLC		
	Designated Person Accountable for Spill Prevention at this Facility: Mahnaz Ghamati		
	Date of Initial Oil Storage: December 1, 2013		
	This Facility has not had a reportable oil spill event that has resulted in the Submission of this plan to the EPA (refer to Section 1.5 for Submission requirements).		
	Management Approval		
The spill prevention, control, and countermeasures for the referenced facilities be implemented and maintained as described in this SPCC Plan.			
	 Management agrees to provide the manpower, equipment, and materials required to expeditiously control and remove any quantity of unauthorized discharge. 		
	Signature: Date: <u>01/20/2023</u>		
	Title of Manager: <u>David Rosas Galindo, Plant Manager</u>		



Date: 01/17/2024

Version: 06

Certification

Pursuant to 40 CFR § 112.3(d), I hereby certify and attest that:

- 1. I am familiar with the provisions of 40 CFR Part 112;
- 2. I, or my agent, have visited and examined the facility;
- 3. This SPCC Plan has been prepared in accordance with good engineering practices, with consideration of applicable industry standards and the requirements of Part 112;
- 4. Procedures for required inspections and testing have been established; and
- 5. This plan is adequate for the facility.

This certification shall in no way relieve the owner/operator of the duty to prepare and fully implement this Plan in accordan with the provisions of 40 CFR Part 112.

Bradford A. DeWitt

State of California Registration No:



Date: **01/17/2024**

MOJAVE SOLAR PROJECT EPA APPLICABILITY OF SUBS 40 CFR Part 112 SUBPART D	TANTIAL HARM CRITERIA	
112.20 (a)(2) and 112.20 (f)(1		
Does the Facility transfer oil over total storage capacity greater of Yes [] No [X]	er-water to or from vessels <u>and</u> does the Facility have a or equal to 42,000 gallons?	
•	il storage capacity greater than or equal to 1 million round storage tank area, does the Facility lack	
_	sufficiently large to contain the capacity of the largest plus sufficient freeboard to allow for precipitation?	
gallons and is the Facility locate	il storage capacity greater than or equal to 1 million ed at a distance such that a discharge from the facility vildlife and sensitive environments?	
Does the Facility have a total oil storage capacity greater than or equal to 1 million gallons <u>and</u> is the Facility located at a distance such that a discharge from the facility would shut down a public drinking water intake? Yes [] No [X]		
Does the Facility have a total oil storage capacity greater than or equal to 1 million gallons <u>and</u> has the Facility experienced a reportable oil spill in an amount greater than or equal to 10,000 gallons within the last 5 years? Yes [] No [X]		
CERTIFICATION		
information submitted in this d	lat I have personally examined and am familiar with the ocument, and that based on my inquiry of those aining the information, I believe that the submitted and complete.	
Signature	Steven Forh	
Printed Name	Steven Pochmara	
Title	Permit Manager	
Date	02/27/2014	



Date: **01/17/2024**

MOJAVE SOLAR PROJECT EPA APPLICABILITY OF SUBS 40 CFR Part 112 SUBPART D	TANTIAL HARM CRITERIA	
112.20 (a)(2) and 112.20 (f)(1	1)	
Does the Facility transfer oil ov total storage capacity greater of Yes [] No [X]	er-water to or from vessels <u>and</u> does the Facility have a or equal to 42,000 gallons?	
gallons <u>and</u> within any abovegous secondary containment that is	il storage capacity greater than or equal to 1 million round storage tank area, does the Facility lack sufficiently large to contain the capacity of the largest plus sufficient freeboard to allow for precipitation?	
gallons and is the Facility locate	il storage capacity greater than or equal to 1 million ed at a distance such that a discharge from the facility vildlife and sensitive environments?	
Does the Facility have a total oil storage capacity greater than or equal to 1 million gallons <u>and</u> is the Facility located at a distance such that a discharge from the facility would shut down a public drinking water intake? Yes [] No [X]		
<u> </u>	il storage capacity greater than or equal to 1 million perienced a reportable oil spill in an amount greater s within the last 5 years?	
CERTIFICATION		
information submitted in this d	nat I have personally examined and am familiar with the locument, and that based on my inquiry of those aining the information, I believe that the submitted and complete.	
Signature	<u>O-21)</u>	
Printed Name	David Rosas Galindo	
Title	Plant Manager	
Date	01/20/2023	



Date: **01/17/2024**

Version: 06

DISTRIBUTION LIST

Note: The Distribution of this Plan is tracked by the Copy Number located on the Title Page. Plan Distribution and Plan Review and Update Procedures are provided in Sections 1.4 & 1.5.

COPY NUMBE R	• <u>PLAN</u> HOLDER	LOCATION
1	Mojave Solar Project 42134 Harper Lake Road; Hinkley, California 92347	Main Office (ALPHA site)
1	Mojave Solar Project 42134 Harper Lake Road; Hinkley, California 92347	Main Office (BETA site)
2	EnviroTech Consultants, Inc. 5400 Rosedale Highway Bakersfield, CA 93308	Main Office
1	Processes Unlimited International Inc. 5500 Ming Ave. Bakersfield, Ca. 93309	Main Office



Date: **01/17/2024**

Version: 06

REVISION RECORD

Note: It is the responsibility of the holder of this plan to ensure that all changes and updates are made. The holder should:

- Remove and discard obsolete pages.
- Replace obsolete pages with the updated pages.
- Record each change on this form.

EXAMPLE	
01/01/01 1-1 thru 1-4; 5-2 HES Staff Update M. Doyle	



Date: 01/17/2024

Version: 06

1 INTRODUCTION

1.1 Facility Description

The Mojave Solar Project facility ("Facility") consists of 1,765 acres and is located in unincorporated San Bernardino County approximately nine miles northwest of the community of Hinkley, California along the Highway 58 corridor (See Figure 1-1). The Facility is accessed via Harper Lake Road, approximately six miles north of the intersection of Harper Lake Road and Highway 58. The existing Solar Electric Generating Stations (SEGS) VIII and IX facilities owned by Next Era Energy Resources are immediately northwest of the Facility. The topography is flat (about 2,070 feet above sea level) consisting of open desert and agricultural land adjacent to the Harper Dry Lake Depression. Elevated land surrounds the Facility site from all directions and can be found 1-3 miles from the Facility. The Facility is owned and operated by Mojave Solar LLC. The California Energy Commission (CEC) has exclusive jurisdiction to license this Facility.

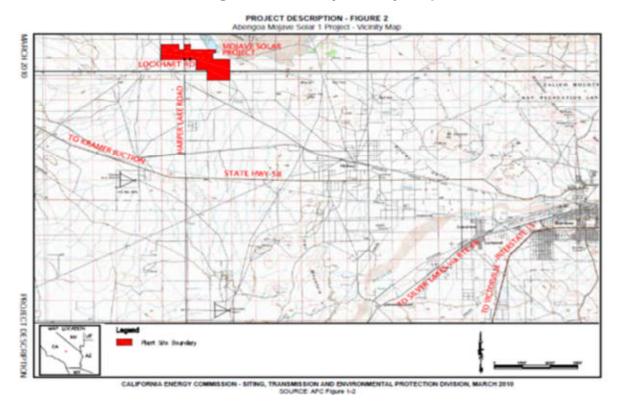


Figure 1-1 Facility Vicinity Map

The Facility consists of two sites, Alpha and Beta, which have a combined nominal electric output of 250 MW from twin, independently operable solar fields. The Alpha site,



Date: 01/17/2024

Version: 06

situated in the northwest portion of the Facility area, occupies 884 acres and is bisected by Harper Lake Road. The Beta site is located east of Harper Lake Road in the southeast portion of the Facility site and occupies 800 acres (See Figure 1-2). The Alpha and Beta sites share the remaining 81 acres of the Facility for activities that include receiving and discharging offsite drainage improvements. Each field (Alpha and Beta) will feed a 125 MW Power Island.



Figure 1-2 Facility Site Map

The Facility uses parabolic trough, solar thermal technology to produce electrical power using a steam turbine generator fed from a solar steam generator. The solar steam generator receives heated heat transfer fluid (HTF) from solar thermal equipment comprised of arrays of parabolic mirrors that collect energy from the sun. The "Mirror Fields" are comprised of single-axis-tracking parabolic trough solar collectors arranged to form many parallel rows aligned on a north-south axis. Each solar collector has a linear, parabolic-shaped reflector that focuses the sun's radiation on a specially designed linear receiver known as a heat collection element (HCE). The collectors track the sun from east to west to ensure that the maximum amount of the sun's radiation is continuously focused on the HCE. The Heat Transfer Fluid, Therminol™ VP-1, is heated to approximately 740° F as it circulates through the HCE and returns to a series of heat exchangers where the fluid is used to generate steam in the solar steam generator



Date: 01/17/2024

Version: 06

system at the Power Island, thereby providing steam to the steam turbine generator to produce electricity. The Facility's electrical transmission lines will interconnect with the Southern California Edison (SCE) 230-kV Kramer-Coolwater #1 transmission, which is located adjacent to the southern border of the Facility.

The Facility uses a wet cooling tower for power plant cooling. The electric re-heaters will supply HTF to HTF heat exchangers as needed during offline hours to keep the HTF in a liquid state when ambient temperatures fall below its freezing point of 54° F. Each Power Island will also have a diesel engine-driven firewater pump for fire protection and a diesel engine-driven backup generator for power plant essentials.

Water for plant cooling and other purposes is supplied via on-site wells, and both the Alpha and Beta sites have newly constructed wells that draw groundwater based on adjudicated water rights from Harper Valley Ground Basin.

A single treatment Facility has been installed for each pair of wells to treat the groundwater to meet potable standards for employee use. A septic system disposes of sanitary wastewater.

1.2 Plan Purpose/Objectives

The purpose of this Spill Prevention, Control, and Countermeasure (SPCC) Plan is to describe measures to be implemented by the Facility to prevent oil discharges from occurring, and to prepare to respond in a safe, effective, and timely manner to mitigate the impacts in the event of a discharge. This Plan is required by the California Energy Commission (CEC). This Plan follows the format specific in 40 CFR Section 112. In addition, this Plan will be used as a reference for oil storage information and testing records, as a tool to communicate practices on preventing and responding to discharges with employees, as a guide to Facility inspections, and as a resource during emergency response.

The specific objectives of this Plan are to define the spill prevention, control, and countermeasures for the Facility and to assist Facility personnel in establishing and maintaining an efficient and effective program. This is accomplished in the Plan by addressing:

- Personnel Training and Spill Prevention Procedures.
- Inspections and Records; Facility Drainage.
- Bulk Storage Tanks.
- Transfer Operations, Pumping, and In-Plant Process, Security



Date: 01/17/2024

Version: 06

The Hazardous Materials Division of the San Bernardino County Fire Department is the Administering Agency and the Certified Unified Program Agency (CUPA) for San Bernardino County with responsibility for regulating hazardous materials handlers, hazardous waste generators, underground storage tank facilities, above ground storage tanks, and stationary sources handling regulated substances. Contact information for this Administering Agency is provided in the Emergency Contact List.

1.3 Plan Distribution Procedures

The person accountable for spill prevention at this Facility shall have the responsibility for administering the Plan. The Distribution Number listed on the Title Page designates plan copies. Distribution will be handled in the following manner:

Distribution of the Plan is tracked by the number on the Title Page.
 A Distribution List is included (page 6) to facilitate control and to identify the current holders of the Plan.

2 SPCC PLAN REGULATION OVERVIEW

2.1 **APPLICABILITY** (§112.1)

This requirement applies to owners or operators of non-transportation-related onshore and offshore facilities engaged in drilling, producing, gathering, storing, processing, refining, transferring, distributing or consuming oil and oil products, and that meet the following criteria:

- Due to the location, could reasonably be expected to discharge oil in harmful quantities into or upon the navigable waters of the United States or adjoining shorelines; and
- Has an aggregate aboveground storage capacity, in containers of 55 gallons or greater capacity, in excess of 1,320 gallons; or
- Has a completely buried storage capacity, excepting tanks subject to 40 CFR Part 280 or 281, in excess of 42,000 gallons.



Date: 01/17/2024

Version: 06

Additionally, in California, if a facility has an aggregate aboveground oil storage capacity in excess of 1,320 gallons, regardless of proximity to navigable waters, then the facility is subject to the California Aboveground Petroleum Storage Act and is required to prepare an SPCC plan in accordance with the Federal Regulations.

This facility has an aggregate aboveground oil storage capacity greater than 1,320 gallons; therefore, is subject to the requirements of the SPCC regulation.

2.2 **DEFINITIONS** (§112.2)

Facility: "Any mobile or fixed, onshore or offshore building, property, parcel, lease, structure, installation, equipment, pipe, or pipeline (other than a vessel or a public vessel) used in oil well drilling operations, oil production, oil refining, oil storage, oil gathering, oil processing, oil transfer, oil distribution, and oil waste treatment, or in which oil is used, as described in appendix A to this part. The boundaries of a facility depend on several site-specific factors, including but not limited to, the ownership or operation of buildings, structures, and equipment on the same site and types of activity at the site. Contiguous or noncontiguous buildings, properties, parcels, leases, structures, installations, pipes, or pipelines under the ownership or operation of the same person may be considered separate facilities."

Production Facility: "All structures (including but not limited to wells, platforms, or storage facilities), piping (including but not limited to flowlines or intrafacility gathering lines), or equipment (including but not limited to workover equipment, separation equipment, or auxiliary non-transportation-related equipment) used in the production, extraction, recovery, lifting, stabilization, separation or treating of oil (including condensate), or associated storage or measurement, and is located in an oil or gas field, at a facility."

Bulk storage container: "Any container used to store oil. These containers are used for purposes including, but not limited to, the storage of oil prior to use, while being used, or prior to further distribution in commerce. Oil-filled electrical, operating, or manufacturing equipment is not a bulk storage container."



Date: 01/17/2024

Version: 06

Tank: All tanks are containers. Regulations further define specific types of tanks, such as "underground" (USTs regulated by Federal UST regulations under 40 CFR 280 and 281), "bunkered", "completely buried" or "partially buried". USTs regulated by UST regulations are not subject to SPCC Regulations. "Breakout" tanks regulated by DOT are also not subject to SPCC Regulations. Bunkered, Completely Buried (such as vaulted tanks other than USTs) and Partially Buried Tanks are considered aboveground storage containers and are subject to SPCC Regulations.

Loading/Unloading Rack: "A fixed structure (such as a platform, gangway) necessary for loading or unloading a tank truck or tank car, which is located at a facility subject to the requirements of this part. A loading/unloading rack includes a loading or unloading arm and may include any combination of the following: piping assemblages, valves, pumps, shut-off devices, overfill sensors, or personnel safety devices."

Oil-filled operational equipment: "Equipment that includes an oil storage container (or multiple containers) in which the oil is present solely to support the function of the apparatus or the device. Oil-filled operational equipment is not considered a bulk storage container and does not include oil-filled manufacturing equipment (flow-through process). Examples of oil-filled operational equipment include, but are not limited to, hydraulic systems, lubricating systems (e.g., those for pumps, compressors and other rotating equipment, including pump jack lubrication systems), gear boxes, machining coolant systems, heat transfer systems, transformers, circuit breakers, electrical switches, and other systems containing oil solely to enable the operation of the device."

2.3 REQUIREMENT TO PREPARE AND IMPLEMENT (§112.3)

The owner or operator or an onshore or offshore facility subject to this regulation must prepare in writing and implement a Spill Prevention Control and Countermeasure Plan in accordance with §112.7.

A licensed Professional Engineer must review and certify a Plan for it to be effective to satisfy the requirements of this part.

By means of this certification the Professional Engineer attests:



Date: 01/17/2024

Version: 06

- That he is familiar with the requirements of this regulation
- That he or his agent has visited and examined the facility
- That the Plan has been prepared in accordance with good engineering practice, including consideration of applicable industry standards, and with the requirements of this part
- That procedures for required inspections and testing have been established
- That the Plan is adequate for the facility
- That, if applicable, for a produced water container subject to §112.9(c)(6), any procedure to minimize the amount of free-phase oil is designed to reduce the accumulation of free-phase oil and the procedures and frequency for required inspections, maintenance and testing have been established and are described in the Plan.

The owner or operator of a facility for which a Plan is required must:

- Maintain a complete copy of the Plan at the facility if the facility is normally attended at least four hours per day, or at the nearest field office if the facility is not so attended, and
- Have the Plan available to the Regional Administrator for on-site review during normal working hours.

2.4 AMENDMENT OF SPCC BY REGIONAL ADMINISTRATOR (§112.4)

Submission of Plan (§112.4(a))

The facility shall submit this Plan to the EPA Regional Administrator within sixty (60) days whenever the Facility has a discharge event(s) from potential spill sources that meets one of the following conditions:

- Discharge more than 1,000 gallons of oil into or upon the navigable waters of the United States or adjoining shorelines in a single spill event; or
- Discharges oil in harmful quantities into or upon the navigable waters of the United States or adjoining shoreline in two spill events greater than 42 gallons within any twelve-month period.



Date: 01/17/2024

Version: 06

Documentation to be included with this Plan submission includes the following:

- Name and location of the facility
- Name(s) of the owner or operator of the facility
- Date and year of initial facility operation
- Maximum storage or handling capacity of the facility and normal daily throughput
- Description of the facility, including plot plants, flow diagrams and topographical maps
- The cause(s) of such discharge, including a failure analysis of system or sub-system in which the failure occurred
- The corrective actions and/or countermeasures taken, including an adequate description of equipment repairs and/or replacements
- Additional preventive measures taken or contemplated to minimize the possibility of recurrence

If, after submission of the Plan to the Regional Administrator, revisions to the Plan are required, the Plan will be amended in accordance with 40 CFR 112.4 (d)(e)(f).

2.5 AMENDMENT OF SPCC BY OWNERS AND OPERATORS (§112.5)

The "Designated Person Accountable for Oil Spill Prevention" (identified on the Certification Page) will coordinate the following plan review and update procedures.

Facility Changes Requiring Plan Revision

This Plan will be revised when there are changes in the Facility's design, construction, operation, or maintenance that materially affects the Facility's potential for the discharge of oil into or upon the navigable waters of the United States or adjoining shorelines. Such amendments shall be incorporated into the Plan within six months of the change and fully implemented as soon as possible but no later than six months following the preparation of the amendment.



Date: 01/17/2024

Version: 06

Changes that may require revision include, but are not limited to:

- Commission or decommission of containers.
- Replacement, reconstruction, or movement of containers.
- Reconstruction, replacement, or installation of piping systems.
- Construction or demolition that might alter secondary containment structures and/or drainage systems.

Five-Year Review

At least once every five years the Facility will complete a review and evaluation of this Plan and make amendments within six (6) months of the review in accordance with 40 CFR Section 112.5. This evaluation will include, at a minimum, the following:

- Applicability of new prevention and control technology which may significantly reduce the likelihood of a spill event from the facility if such technology has been field-proven at the time of the review.
- Accuracy of the SPCC Plan as compared to the current facility operation and SPCC Regulations.
- Capacity and structural integrity of secondary containment structures.
- SPCC inspections and records files to ensure continuity for a minimum period of five (5) years.

Certification of Revisions by a Professional Engineer

- Technical amendments to the Plan require certification by a Registered Professional Engineer.
- Administrative changes such as updates to contact information or other changes that do not increase the likelihood of a spill or discharge will not require certification by a Registered Professional Engineer.
- Plan amendments or submittals to the EPA Regional Administrator due to the occurrence of reportable spills or other Plan Amendments by the Regional Administrator will not require



Date: 01/17/2024

Version: 06

recertification by a Registered Professional Engineer unless a technical amendment is required.

These procedures are in accordance with 40 CFR Sections 112.5.

Inclusion of Amendments into the Plan

- The facility will coordinate the word processing, publication, and distribution efforts of completing the revisions and maintaining the Plan.
- The plan holder, immediately upon receipt of any revisions, shall review and insert the revised pages into the Plan and discard the obsolete pages. This action should then be recorded on the "Revision Record" page in the Foreword.

2.6 QUALIFIED FACILITY PLAN REQUIREMENTS (§112.6)

The facilities included in this SPCC plan do not meet the criteria of a "Qualified Facility" as defined below:

- A Tier I qualified facility meets the qualification criteria of a Tier II qualified facility and has no individual aboveground oil storage container with a capacity greater than 5,000 U.S. gallons.
- A Tier II qualified facility is one that has had no single discharge exceeding 1,000 U.S. gallons or no two discharges each exceeding 42 U.S. gallons within any twelve-month period in the three years prior to the SPCC Plan self-certification date, or since becoming subject to this part if the facility has been in operation for less than three years and has an aggregate aboveground oil storage capacity of 10,000 U.S. gallons or less.

3 §112.7 GENERAL REQUIREMENTS FOR SPCC PLANS

3.1 GENERAL REQUIREMENTS (§112.7(a))

Facility Conformance with Part 112 Requirements (§112.7(a)(1))



Date: **01/17/2024**

Version: 06

The facility is in conformance with the following regulatory requirements:

 Federal Oil Spill Prevention regulations – US EPA Final Rule for Oil Pollution Prevention; Non-Transportation Related Onshore and Offshore Facilities (40 CFR Part 112).

Facility Description and Diagrams (§112.7(a)(3)(i)

The Mojave Solar Project will produce solar electricity by means of an integrated process using solar energy to heat a synthetic petroleum-based fluid in a closed-loop system that, in turn, heats water to create steam to drive a conventional steam turbine. The Facility is comprised of two separate but similar sections- the Alpha and Beta solar fields and Power Islands. An overall facility diagram showing the entire site is located in Appendix A-1. Appendix A-2-Central Plant Layout provides details of the Power Islands (Alpha Power Island is represented; however, the Beta Power Island is identical with the exception of gasoline storage), and Appendix A-3 shows the detailed locations of the pertinent HTF, HF and lube oil storage facilities noted.

Oil Storage and Oil-Filled Equipment

Oils stored at the facility required to have secondary containment include hydraulic fluid and lube oil. Oils used in operational equipment include Heat Transfer Fluid (HTF), mineral oil, and hydraulic fluid.

CFR 40, Part 112 Oil Pollution Prevention; Spill Prevention, Control, and Plan Requirements-Amendments (Section 112.2) excludes oil-filled operational equipment from the definition of bulk storage provided the oil storage container in which the oil is present solely supports the apparatus or the device. Examples of oil-filled operational equipment include hydraulic and lubricating systems and heat transfer systems. The regulations provide for the option of SPCC compliance by providing for secondary containment for each piece of operational equipment in accordance with 112.7(c); or by preparing a contingency plan which includes active containment (countermeasures or spill response capability) which prevent discharge into navigable waters.



Date: 01/17/2024

Version: 06

Specific locations of oil storage areas and oil-filled operational equipment are indicated on the diagrams in Appendix A-3. A table listing oils stored and their secondary containment and oil-filled operational equipment is included in Appendix B.

Heat Transfer Fluid (HTF)

Therminol VP1 is the heat transfer fluid (HTF) that will be used in the solar panels to collect solar heat and transfer it in order to generate steam to run the steam turbines. Therminol is a mixture of 73.5% diphenyl ether and 26.5% biphenyl and is a solid at temperatures below ~54 °F. Therminol can therefore be expected to remain liquid if a spill occurs. While the risk of off-site migration is minimal, Therminol is highly flammable, and fires have occurred at other solar generating stations that use it. Approximately 2,292,000 gallons of HTF will be contained in the pipes and heat exchanger. Isolation valves are placed throughout the HTF piping system designed to automatically block off sections of the piping in which a loss of pressure is detected.

To accommodate the volumetric change that occurs when heating the HTF to the operating temperature, expansion vessels and overflow tanks are required. Nitrogen will be used to provide a blanket on the headspace of the expansion vessels and tanks to prevent oxidation and contamination of the HTF by reducing its exposure to atmospheric air in the expansion vessels.

- Expansion Vessels: For each Power Island, there are four (4) HTF expansion vessels. Each HTF expansion vessel is designed to operate at 32% level with a total of 81728.74 lbs. of HTF. Based on the specific gravity of the HTF, each vessel will operate at approximately 9,245 gallons of HTF.
- HTF Overflow Tanks: For each Power Island, there are two (2) HFT overflow tanks, each having a capacity of 57,000 gallons.

The "close-loop" heat transfer process circulates HTF through the facility's pumps, expansion tanks, piping, and other associated components and does not require the transfer of oil. The HTF expansion and overflow tanks are present solely to support the HTF heat transfer/circulation process, and therefore meet the definition of "oil filled operational equipment".



Date: 01/17/2024

Version: 06

Although the HTF is not defined as bulk storage, The Facility has constructed secondary containment for HTF expansion vessels and overflow tanks and has a prepared an emergency response plan including countermeasures and spill response procedures. Secondary containment drawings are included in Appendix C and the facility's emergency response plan is included in the Facility HMBP.

Hydraulic Fluid

Hydraulic Fluid (HF) is brought to the Facility by flatbed truck in 330-gallon totes and used in the hydraulic pumps to rotate the mirrors in the Mirror Fields. The hydraulic pumps and related distribution equipment are considered "oil filled operational equipment" and are not considered bulk storage containers. Hydraulic fluid is stored within the chemical products storage area (No. 38 on Central Plant Layout Map) of each Power Island. The chemical products storage areas have been constructed with secondary containment to meet the requirements of 110% of volume of the largest container. Lube Oil

Storage areas for lube oil (exceeding 55 gallons) are located within the Lube Oil Skid (No. 28 on Central Plant Layout Map) of each Power Island. The lube oil skids have been constructed with secondary containment to meet the requirements of 110% of volume of the largest container.

Mineral Oil

Mineral oil is used in the facility's power transformers. The power transformers are defined as "oil filled operational equipment" (per §112.2) and are not considered bulk storage.

Transportation and Distribution of Oils

Heat Transfer Fluid (HTF)

Various containerized and bulk hazardous materials will be transported to the Facility via truck. Approximately 2.3 million gallons of HTF will be transported to the Facility prior to start-up of operations resulting in an estimated 374 deliveries total or 10 trucks per week. Each truck will deliver approximately



Date: 01/17/2024

Version: 06

6,130 gallons of HTF. The risk of an accidental release during HTF transport in the Facility area has been assessed based on criteria such as previous accident data, established accident modeling, and existing regulatory requirements regarding transport of hazardous materials (e.g., standards for vehicle safety and driver qualifications/competence). The evidence shows that, with applicable regulatory conformance, the risk of exposure to significant concentrations of HTF during transportation to the Mojave Solar, LLC facility is extremely low.

The HTF tank truck unloading area will be surrounded with a rollover berm that provides secondary containment in the event of a discharge during transfer operations. The rollover berm is designed to address the more stringent containment requirements of 40 CFR 112.7(h), which requires that the berm be sufficient to contain the capacity of the largest compartment, plus freeboard for precipitation. The curbed area has been designed accordingly.

HTF is transported through the Mirror Fields using a supply-and-return header system, which assists in balancing flow through the pipe system. Pumps include seal cooling and high temperature materials to preserve component function under extreme conditions. The Mirror Fields are divided into sections with automatic or semiautomatic isolation valves. The isolation valves will be located to minimize the volume of HTF leakage during a pipe failure and may either be triggered automatically or by the operator inside the facility control room. Piping expansion loops are located throughout the Facility as required to maintain the composite pipe stress within the allowable limits.

Hydraulic Fluid (HF)

Hydraulic Fluid (HF) is brought in by flatbed truck in 330-gallon totes. The totes are unloaded at the containment areas. Secondary containment for unloading areas is provided with oil booms and pads to contain any spills or leaks. HF remains in the totes until it is downloaded into smaller containers for use in filling the hydraulic pumps that operate the mirrors. Small containers consist of less than 50-gallon steel or plastic containers. Minor amounts of HF pass through short length, small diameter hoses or pipes that transfer HF fluid from containers to motors.

Atlantica Sustainable Infrastructure

Date: 01/17/2024

Version: 06

Lube Oil/Mineral Oil

Lube Oil is brought in by truck in containers. Mineral oil is preloaded into the transformers prior to arriving on site.

Discharge Prevention Measures (§112.7(a)(3)(ii))

Off-Site Drainage

The Facility is located on relatively level terrain. The area originally drained towards the Harper Lake Wash, which is located northeast of the Facility. The off-site storm water runoff from the mountains east, west and the north of the Facility is managed by an interceptor and conveyance channels as well as detention basins to ensure that pre-development flows are not exceeded, and historic flow patterns are maintained. Off-site flows are eventually released into the Harper Lake Wash Area north of the Facility. (See Figure 1-2 Facility Site Map).

The Facility's storm water will be retained on-site in drainage basins. Runoff in the Mirror Fields will be collected in a series of shallow basins between the mirror rows. These basins will be designed to provide natural percolation/infiltration of the rainfall. The shallow retention areas are designed with a five percent slope to minimize the effects of erosion and soil carry-over and deposition into the retention basins. The drainage from the Power Islands will be contained within the Power Islands.

Discharge or Drainage Controls (§112.7(a)(3)(iii))

The Facility has developed measures for operating personnel that cover the activities to be conducted during the routine handling, loading, unloading, and transfer of products. Such measures include routine startup and shutdown, emergency shutdown, routine operating practices, and emergency response procedures. (See the Facility HMBP)

All oil storage containers (greater than 55 gallons) are provided with sufficient secondary containment to contain the volume of the largest container within



Date: **01/17/2024**

Version: 06

the containment area plus freeboard (110%). Facilities or equipment without secondary containment are addressed in Section 2.4.

The steel HTF overflow tanks are equipped with direct-reading level gauges and with high level alarms set at 90 percent of the rated capacity. Liquid level sensing devices will be tested on a monthly basis during the monthly inspection of the facility, following manufacturer recommendations. Venting capacity will be suitable for the fill and withdrawal rates. Overfill prevention systems for the HF and lube oil will be developed based on the operation of those systems. Totes will be not refilled, and therefore overfill prevention systems do not apply. Facility personnel will be present throughout the filling operations to monitor the product level in the tanks.

On-Site Drainage/Discharge

Drainage from the curbed and diked/containment areas including storm water, overflow from the adjacent tanks, and spillage will be contained and must be manually pumped out. The contents of the secondary containment areas will be inspected by facility personnel prior to pumping. Any water containing oil will be taken to the oil/water separator for treatment.

- Discharges occurring during truck loading/unloading operations will be restrained by the rollover berm. Operation and maintenance trucks may transport HTF or HF within the facility. When they are parked at the facility for an extended period of time (such as parking overnight with a load of product), they will be positioned in an area which will either provide secondary containment capacity (i.e., sufficient for the capacity of the delivery truck and additional freeboard for 4 inches of precipitation) or will be positioned such that any leakage will be able to be contained by booms or pads prior to entering a drainage basin.
- Discharge from above-ground storage tanks, totes or pipelines without direct containment will be identified and efforts made to contain the discharge by booms, pads or other material prior to reaching drainage basins.



Date: 01/17/2024

Version: 06

 Totes and portable containers will have secondary containment. Any discharged material will be quickly contained and cleaned up using sorbent pads and appropriate cleaning products.

Countermeasures for Discharge Discovery, Response, and Cleanup (§112.7(a)(3)(iv))

The Facility uses in-house personnel to respond to small releases and contracts with a spill response contractor to provide immediate response to larger. All employees are trained in spill response and the SPCC plan is reviewed annually. The training provides specific response information including notification guidelines and available resources.

Leak detection will be accomplished in a combination of ways. A Facility employee performs a complete walk-through of the facility each day. This daily visual inspection involves: (1) looking for storage /piping damage or leakage, stained or discolored soils, or excessive accumulation of water in diked and bermed areas. Small leaks, which could occur at ball joints or other connections, will be detected based on these daily inspections. Small leaks could then be corrected via repacking of joints or valves or by minor repairs if needed. The ability to isolate loops and sections of the field will allow for quick repairs. In the event of larger sudden leaks, these are handled through a combination of remote pressure sensing equipment and remote operating valves that will allow for isolation of large areas of the field, or possibly the entire field.

Methods of Disposal of Recovered Materials (§112.7(a)(3)(v))

Visible discharges from any container or appurtenance – including seams, gaskets, piping, pumps, valves, rivets, and bolts – will be quickly corrected upon discovery. Oil will be promptly removed from the containment areas and disposed of according to the waste disposal method.

Spilled materials will be recovered via pump and vacuum lines. The material will be treated as waste and will be removed by a contracted third-party in accordance with the Hazardous Materials-Contingency Plan included in the Facility Emergency Response program.



Date: 01/17/2024

Version: 06

Contact List and Phone Numbers for Response (§112.7(a)(3)(vi))

A current contact list that includes the facility response coordinator, National Response Center, response contractors, and appropriate Federal, State and Local agencies can be found in the Facility's Emergency Response program. Copies are kept in the main office.

Spill Notification Requirements (§112.7(a)(4))

Spill notification requirements are summarized in the Spill Notification Guidelines located in the Facility's Emergency Response program.

Response Plan (§112.7(a)(5))

The facility has developed an Emergency Contact List that will be used in the event of an oil spill. The list includes contact information for facility personnel, spill contractors, emergency numbers, and government agencies that must be notified in case of a spill. The list can be located in the Facility's Emergency Response program.

The responsibilities of the response personnel include identifying the size, position, and content of the spill, and also the direction and speed and the chances of entering a vulnerable area.

No member of the response party shall do anything that would put himself or herself or anyone else at any sort of risk. Knowing this, it is also important that the flow of oil be blocked off as soon as possible as to prevent the general public from being affected.

The facility's Hazardous Materials Contingency Plan is located in Facility Emergency Response program.

3.2 Rate, Quantity and Direction of RELEASE (§112.7(b))

The predicted rate and quantity of a release from the bulk storage containers are noted in Appendix B. Any changes to this information will be amended in accordance with Section 2.5 of this Plan and 40 CFR Part 112 Subpart A Section



Date: 01/17/2024

Version: 06

112.5. Direction of flow is shown directly on the overall Facility Plan in Appendix A-1. Other facilities are addressed below:

There is potential for oil spills to occur as a result of equipment failure.					
Spill Source	urce Type of		Estimated Volume	Direction	Secondary
	Failure		(max. rate of flow)	of Flow	Containment
TRANSFER	Leak		Will vary depending	Varies	None (1)
LINES			on flow rate, pipe		
			diameter, location,		
			and spill duration		
MANIFOLDS	Leak		Will vary depending	Varies	None (1)
			on flow rate and spill		
			duration		
STORAGE	Leak	or	5,000 Gallons	Varies	Concrete walls
TANKS	Rupture				and curbing
OIL-FILLED	Leak		Will vary depending	Varies	None (1)
EQUIPMENT			on flow rate and spill		
			duration		
TRUCK	Leak v	while	Will vary depending	Varies	See note (2)
LOADING	loading		on flow rate and spill		
			duration		

- (1) Permanent containment structures are not practical for these types of equipment, as potential spill volumes cannot be adequately predicted. Regular inspections, diligent monitoring and an Oil Spill Contingency Plan will be utilized to prevent and control spills at these sites.
- (2) Loading racks are not present at these facilities. Truck loading is accomplished through flex lines and pumps. When such operations are performed, they are continuously monitored.

3.3 Secondary Containment / Diversionary Structures (§112.7(c))

Secondary containment is provided for each tank storage area as shown in Appendix B. Containment structures are of sufficient size and impermeability to retain any release until cleanup occurs.



Date: 01/17/2024

Version: 06

3.4 Contingency Planning (§112.7(d))

Exceptions from Secondary Containment

In section 3.2, the facility identified equipment for which it is not practical to install secondary containment or containment structures, as described in section 112.7(c).

It is not practical to construct containment outside the proximity of the listed major facilities for equipment, such as transfer lines, pumps, manifolds, truck loading areas, and oil-filled equipment.

Buried ferrous piping at this facility will be either cathodically protected against corrosion or will be provided with a protective wrapping and coating. When a section of buried line will be exposed, it will be carefully examined for deterioration. If corrosion damage will be found, additional examination and corrective action will be taken as deemed appropriate considering the magnitude of the damage. Additionally, integrity and leak testing of buried piping will be conducted at the time of installation, modification, construction, relocation, or replacement. Records of all tests will be kept at the facility for at least three years. Lines that will not be in service or are on standby for an extended period of time will be capped or blank-flanged and marked as to their origin. All pipe supports will be designed to minimize abrasion and corrosion and to allow for expansion and contraction. Pipe supports will be visually inspected during the monthly inspection of the facility. All aboveground piping and valves will be examined monthly to assess their condition. Inspection includes aboveground valves, piping, appurtenances, expansion joints, valve glands and bodies, catch pans, pipeline supports, locking of valves, and metal surfaces. Observations will be noted on the SPCC Inspection Checklist provided in this Plan (Appendix D-1). Warning signs will be posted at appropriate locations throughout the facility to prevent vehicles from damaging aboveground piping and appurtenances. Most of the aboveground piping will be located within process areas that will not be accessible to vehicular traffic. Brightly painted bollards will be placed where needed to prevent vehicular collisions with equipment.

Oil Spill Contingency Plan (§112.7(d)(1))



Date: 01/17/2024

Version: 06

An Emergency Contingency Plan is included in the Hazardous Materials Business Plan (HMBP) prepared in accordance with state regulations. An Emergency Contact List is included in the Facility's Emergency program which addresses oil spills for equipment listed as having no secondary containment in section 3.2.

Written Commitment (§112.7(d)(2))

For the equipment listed as having no secondary containment in section 3.2, the facility has provided a written commitment of manpower, equipment, and materials necessary to remove any quantity of oil discharged that may be harmful. Refer to the "Certification Page".

3.5 Inspections, Testing, and Records (§112.7(e))

Facility personnel perform SPCC Inspections quarterly. A copy of the "SPCC Inspection Checklist" is located in Appendix D-1 and a copy of the "Mojave Solar Project Inspection Checklist" is located in Appendix D-2. In addition to the quarterly inspection, surveillance is a routine function of the facility personnel.

Operators inspect their facilities daily for signs of leaks. If a spill is detected, its source would be shut-in and supervisory personnel notified and appropriate actions taken to:

- 1. Contain and clean up spill
- 2. Repair the equipment that was the source of the leak
- 3. Make any required notifications

The facility also conducts periodic audits and facility reviews, that include spill prevention, containment, and control procedures.

Records of the quarterly inspections, signed by the appropriate supervisor or inspector, are maintained with the SPCC Plan for a minimum period of three (3) years.



Date: 01/17/2024

Version: 06

3.6 Personnel, Training, and Discharge Prevention (§112.7(f))

Training (§112.7(f)(1))

Employees are given annual training on the SPCC plan, as applicable. The major emphasis of the training is in spill prevention and response, good housekeeping, and material management practices and an understanding of the SPCC Plan including applicable pollution control laws and discharge procedure protocols

Person Accountable for Discharge Prevention (§112.7(f)(2))

The Plant Manager is responsible for discharge prevention.

Discharge Prevention Briefings (§112.7(f)(3))

Discharge prevention briefings are conducted annually for oil handing personnel. The briefings highlight and describe known discharges or failures, malfunctioning components, and any recently developed precautionary measures. All training will be documented and maintained with this plan.

3.7 **Security** (§112.7(g))

The facility has implemented the following security practices at the facility:

- Each facility is surrounded by an 8 foot tall chain link fence.
- Entrance to each site is controlled by a manned gate. Personnel entering the facility must provide identification to gain access to the facility. A visitor log is maintained at the facility to record access granted to non-employee personnel.
- Contracted security officers actively monitor the property to detect suspicious persons or activities.
- Security lighting is used to deter trespassing and ensure safety for those monitoring the premise. This lighting is also sufficient to assist with the detection of oil discharges.



Date: 01/17/2024

Version: 06

3.8 TANK CAR AND TANK TRUCK LOADING/UNLOADING RACK (§112.7(h))

This facility does not utilize tank car and tank truck loading and unloading racks as defined in 40 CFR Part 112 Section 112.2.

3.9 Brittle Fracture Evaluation (§112.7(i))

The facility will inspect any aboveground storage containers that undergo repair, alteration or change in service. The inspection evaluates the potential for discharge due to brittle fracture or other catastrophe that might have been affected by the repair, alteration or change in service.

The facility will also investigate equipment failures. The inspection considers the condition of the equipment, including the potential for brittle fracture, and recommends changes to prevent a recurrence of the failure.

3.10 Conformance with Other Applicable Regulations (§112.7(j))

In 1989, California adopted the Aboveground Petroleum Storage Act under California Health and Safety Code, Chapter 6.67. This regulation requires all facilities with aboveground oil storage tank aggregate capacity of 1,320 gallons or more, regardless of surface water proximity, to develop SPCC Plans in accordance with the guidelines set forth in the SPCC Regulations under 40 CFR Part 112.7, and be under the jurisdiction of the State through the Regional Water Quality Control Board and the Certified Unified Program Administrator (CUPA). This facility is subject to the regulation.

This facility does store hazardous materials and as such falls under Hazardous Materials Business Plan regulations under California jurisdiction (see Appendix E-Hazardous Materials Contingency Plan).

3.11 Qualified Oil-filled Operational Equipment (§112.7(k))

All oil-filled operational equipment at this facility meets the criteria as "Qualified".



Date: 01/17/2024

Version: 06

A Consolidated Contingency Plan is included in the Hazardous Materials Business Plan (HMBP) prepared in accordance with state regulations. An Emergency Contact List is included in the Facility's Emergency Response program which addresses oil spills for all oil-filled operational equipment.

For all oil-filled operational equipment, the facility has provided a written commitment of manpower, equipment, and materials necessary to remove any quantity of oil discharged that may be harmful. Refer to the "Certification Page".

4 §112.8 SPCC Plan Requirements for Onshore Facilities

4.1 General Requirements (§112.8(a))

This Plan satisfies the requirements of Section 112.7 in addition to the specific discharge prevention and containment procedures that follow.

4.2 Facility Drainage (§112.8(b))

Drainage from Secondary Containment Berms (§112.8(b)(1))

The Facility does not drain any containment areas to any pond, watercourse, storm water drains, etc. Pumps and vacuum lines will be used to remove accumulated materials as necessary.

4.3 Bulk Storage Containers (§112.8(c))

Materials of Construction (§112.8(c)(1))

The Facility's bulk storage containers have the following design characteristics, materials of construction, and fail-safe engineering features:

Storage tanks are constructed of either welded or bolted steel. This
material is determined to be compatible with the products stored
and the conditions of storage (including pressure and temperature).

Atlantica Sustainable Infrastructure

Date: 01/17/2024

Version: 06

- Chemical storage containers are constructed of steel or plastic and are designed to be compatible with the contents.
- Tanks are operated within "Safe Fill" levels below the capacity limits of the tank.

Secondary Containment (§112.8(c)(2))

All bulk oil storage facilities have secondary containment designed to contain at least 110 percent of the maximum volume of the single largest tank in the containment area.

The secondary containment system provided for the bulk product storage tanks has the following design and construction characteristics:

- The calculated secondary containment volumes are detailed in Appendix B.
- The secondary containment is sufficiently impervious to contain a release until released material can be removed.

Drainage of Uncontaminated Rainwater ((§112.8(c)(3))

Rainwater within containments will be removed with pumps and vacuum lines as necessary.

Completely Buried Metallic Tanks (§112.8(c)(4))

The Facility does not contain any buried, partially buried or bunkered metallic tanks

Buried/Partially Buried Metallic Tanks (§112.8(c)(5))

The Facility does not contain any buried, partially buried or bunkered metallic tanks.

Testing of Aboveground Containers (§112.8(c)(6))

Integrity testing of aboveground containers is performed as required, and when repairs are made, in accordance with the facility PSM program. This program



Date: 01/17/2024

Version: 06

details and records required inspections and personnel qualifications. The program and associated records are maintained at the facility. Plus, operations personnel will conduct periodic visual inspections of aboveground containers to determine if they have become compromised and/or leaking.

Internal Heating Coils (§112.8(c)(7))

There are internal heating coils within the HTF expansion vessels which are located within each Power Island. Each Power Island has four expansion vessels equipped with internal heating coils. Steam return and exhaust lines are monitored for contamination from leaking heating coils to ensure oils are not transferred into systems outside of spill containment areas.

Engineering to Prevent Releases (§112.8(c)(8))

The following engineering designs and practices are employed at the facility:

- Fail-safe engineering considerations include proper sizing of piping and gauging equipment.
- Audible communication between operators to prevent discharges due to overfilling or transfer equipment leaks.

Effluent Treatment Facilities (§112.8(c)(9))

The Mojave Solar LLC includes facilities for the treatment of water used during plant operations. An oil/water separator is used to treat water contaminated with oil. All wastewater from plant operations is treated and recycled back into the facility.

Visible Discharges (§112.8(c)(10))

Visible discharges of oil from a container are promptly remedied. Any accumulation of oil from these discharges is promptly removed.

Mobile or Portable Oil Storage Containers (§112.8(c)(11))

All mobile or portable oil storage containers have secondary containment designed to contain 110 percent of the maximum volume of the single largest container.



Date: **01/17/2024**

Version: 06

4.4 Facility Transfer Operations (§112.8(d)) (§112.12(d)) (Aboveground Valves, Piping Association with Transfer Operations)

Valves, Piping Association with Transfer Operations)
Inspection of Buried Piping (§112.8(d)(1))
The facility does not operate any oil-containing buried piping.
Out-of-Service Piping (§112.8(d)(2))
Piping that is not in service or is in standby service for an extended period is capped or blind-flanged at the terminal connection of the transfer point. The origin of the piping is also marked.
Pipe Supports (§112.8(d)(3))
Pipe supports are designed to minimize any abrasion or corrosion of pipes and allows for expansion and contraction of the pipelines that are being supported.
Inspection of Aboveground Valves, Piping, and Appurtenances (§112.8(d)(4))
The following table lists equipment that is routinely inspected for spill and pollution prevention and control purposes:
 □ Flange joints □ Expansion joints □ Valve glands and bodies □ Catch pans □ Valves locks and/or seals □ Pipeline supports □ Metal surfaces

Date: **01/17/2024**

Version: 06



Problems identified during any inspection are documented and addressed as soon as possible, so as to prevent environmental and operating hazards. When required, follow-up inspections are performed and documented to ensure that appropriate corrective measures have been taken to ensure compliance.

All aboveground valves and pipelines are regularly examined during operating personnel rounds. During these examinations, operating personnel assess the general condition and necessity for corrective actions of the items.

Vehicles Entering Areas with Aboveground Pipelines (§112.8(d) (5))

All vehicle operators driving within the Facility are verbally notified of aboveground piping and oil transfer operations vulnerable to damage from vehicles

5 Appendix

Appendix A1- Overall Facility Maps

Appendix A2- Central Plant Layouts

Appendix A3- Location of Storage Facilities And Oil Filled Equiepment

Appendix B- List of Containers With Secondary Containment Calculations

Appendix C- Containment Diagrams

Appendix D1- SPCC Inspection form

Appendix D2- Inspection Checklists

Appendix E- References

Date: **01/17/2024**

Version: 06




APPENDIX A-1

MOJAVE SOLAR PROJECT OVERALL FACILITY MAPS

Date: **01/17/2024**

Version: 06



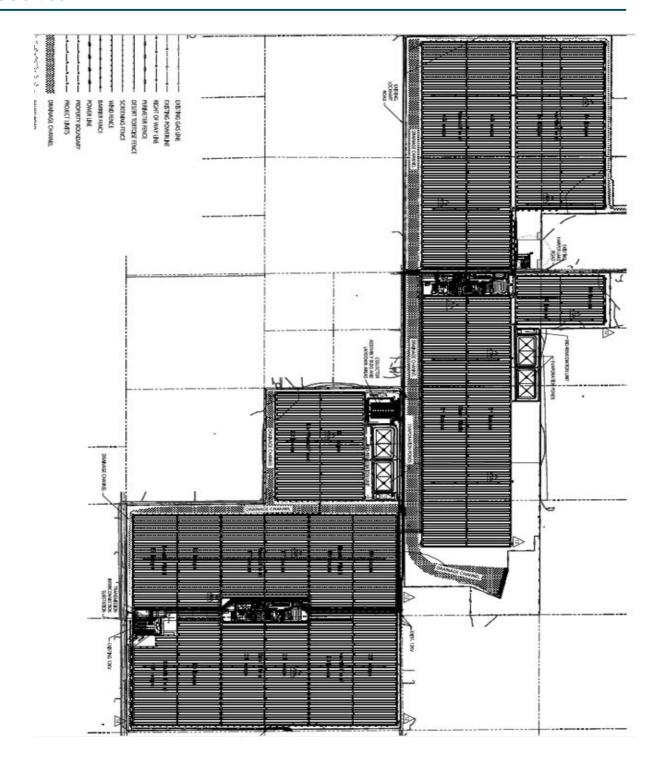


Date: **01/17/2024**

Version: 06



Alpha Plant Overall Map

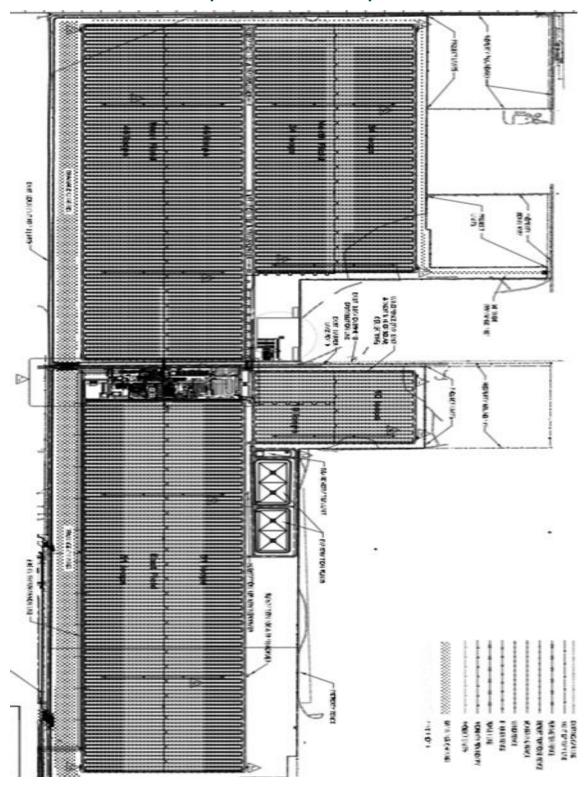


Date: **01/17/2024**

Version: 06



Beta Plant Overall Map

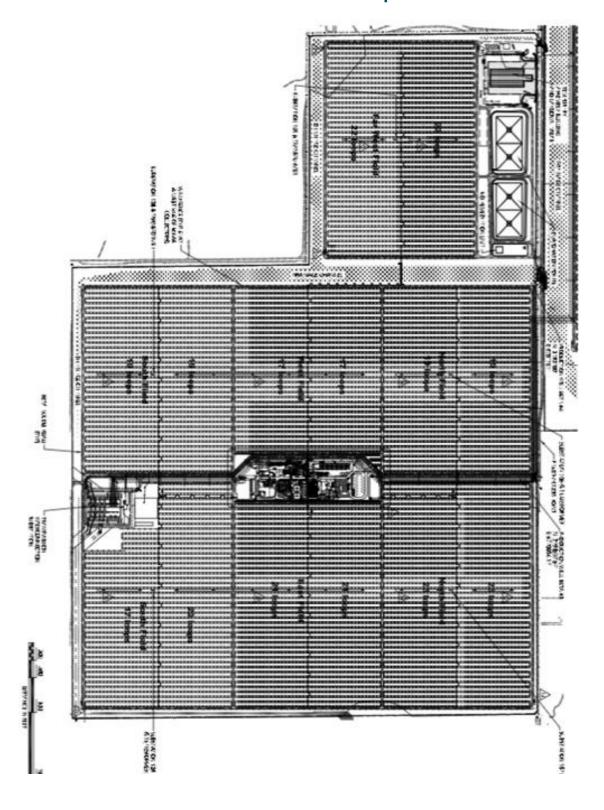

Date: **01/17/2024**


Version: 06



APPENDIX A-2

MOJAVE SOLAR PROJECT CENTRAL PLANT LAYOUT

Alpha Plant

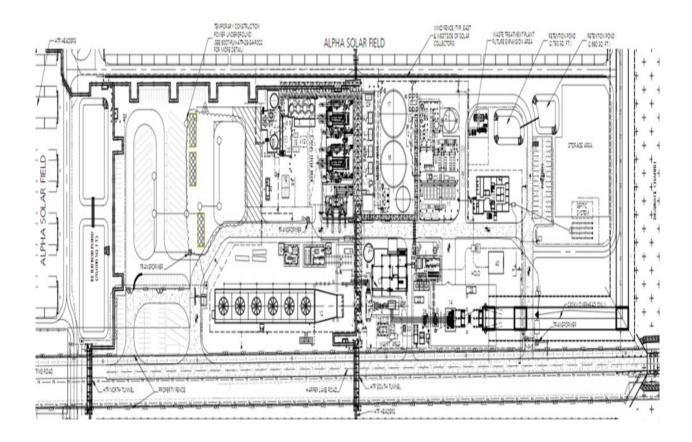


Date: **01/17/2024**

Version: 06




Beta Plant

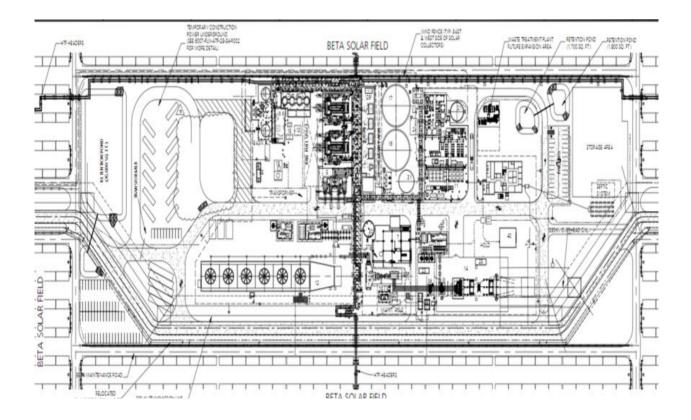

Date: **01/17/2024**

Version: 06



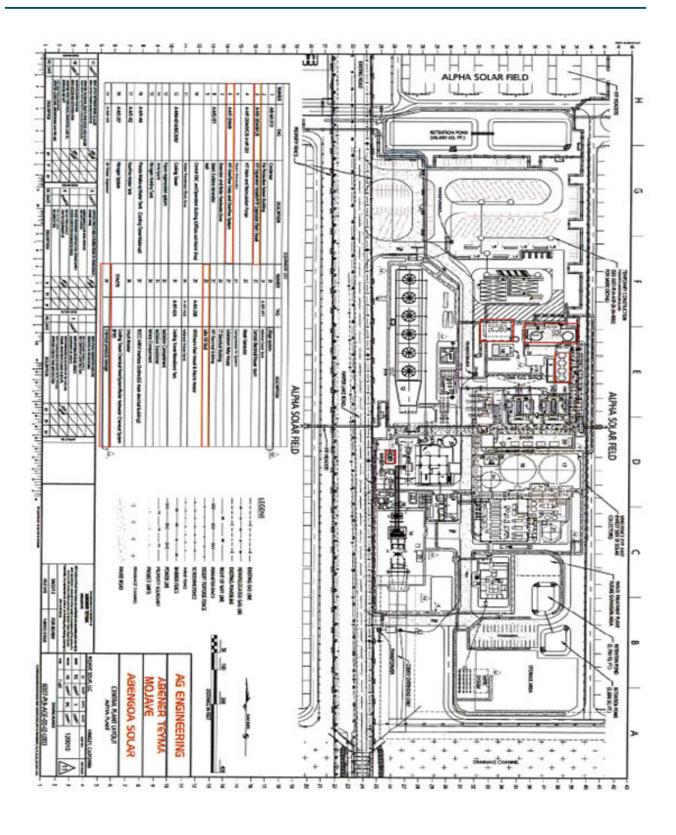

Date: **01/17/2024**

Version: 06



APPENDIX A-3

MOJAVE SOLAR Project LOCATIONS OF OIL STORAGE FACILITIES AND OIL-FILLED EQUIPMENT

Date: **01/17/2024**

Version: 06




(SEE 6007-PLN-ATP-28-34-KUUZ FOR MORE DETAIL) (Hydraulic Fluid) Chemical LOCATIONS OF OIL STORAGE AND OIL-FILLED EQUIPMENT Tanks (2, 57,000 APPENDIX A-3 田 Vessels (4, 57,000 gallons TRANSFORMER TUBE PULL SPACE

ALPHA ORIENTATION (BETA LAYOUT IS IDENTICAL)

Date: **01/17/2024**

Version: **06**



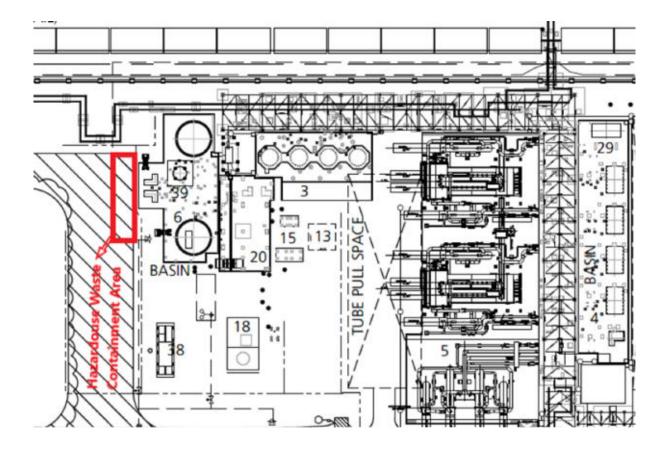

Date: **01/17/2024**

Version: 06



FRANSFORMER HARPER LAKE ROAD PB

ALPHA ORIENTATION (BETALAYOUT IS IDENTICAL)


APPENDIX A-3
LOCATIONS OF OIL STORAGE AND OIL-FILLED EQUIPMENT

Date: **01/17/2024**

Version: **06**



Alpha Plant Fuel Island and Chemical Storage Building

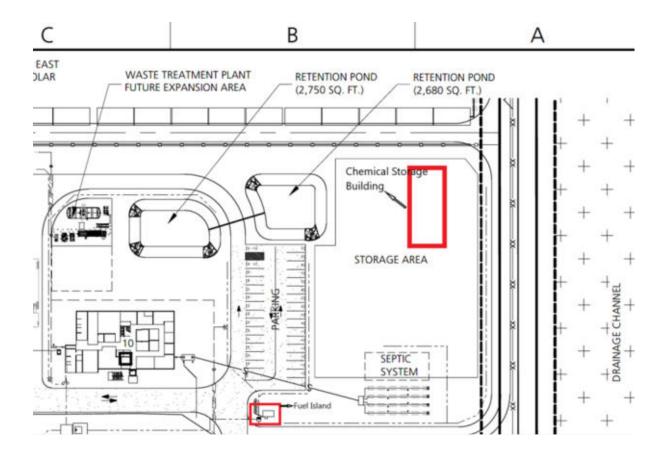

Date: **01/17/2024**

Version: 06



APPENDIX B

MOJAVE SOLAR Project LIST OF CONTAINERS WITH SECONDARY CONTAINMENT CALCULATIONS

Date: **01/17/2024**

Version: **06**



Alpha Power Island						
Equipment (Area or Tank Number Per Power Island Facility Plan)	Description Commodity	Alpha Power Island	Capacity (Gal)	Rate (Bbl/Hr)	Direction Of Flow	Secondary Containment Volume
,	Oil Storage (Sub	ject To Secon	dary Contains	ment Req	uirement)	
Gasoline Tank	Gasoline	Leak, Rupture	2000	Varies	Varies	>2000 Gal
Diesel Tank	Diesel	Leak, Rupture	2000	Varies	Varies	>2000 Gal
Diesel Tank	Diesel	Leak, Rupture	4,000	Varies	Varies	>3000 Gal
Diesel Tank	Diesel	Leak, Rupture	850	Varies	Varies	>850 Gal
Chemical Products Storage	Motor Oil	Leak, Rupture	110	Varies	Varies	>110 Gal
Chemical Products Storage	Hydraulic Oil	Leak, Rupture	5,280	Varies	Varies	>5,280 Gal
Oil -Filled	Operational Equipn	nent (Not Sub	ject To Secon	dary Cont	ainment Req	uirement)
6-1	Heat Transfer Fluid (Therminol) VP-1 Overflow Tank	Leak, Rupture	57,000	Varies	Varies	
6-2	Heat Transfer Fluid (Therminol) VP-1 Overflow Tank	Leak, Rupture	57,000	Varies	Varies	
3-1	Heat Transfer Fluid Expansion Vessel	Leak, Rupture	9,245	Varies	Varies	Secondary Containment No Required
3-2	Heat Transfer Fluid Expansion Vessel	Leak, Rupture	9,245	Varies	Varies	
11	Heat Transfer Fluid Expansion Vessel	Leak, Rupture	9,245	Varies	Varies	
3-3	-	Leak, Rupture	9,245	Varies	Varies	
3-3	Heat Transfer Fluid Expansion Vessel	ceak, Rupture				
		Leak Leak	9,800	Varies	Varies	
3-4 Transformer	Expansion Vessel		9,800	Varies Varies	Varies Varies	

Date: **01/17/2024**

Version: 06



		Beta Po	wer Island	l			
Equipment (Area or Tank Number Per Power Island Facility Plan)	Description Commodity	Major Type Of Failure	Capacity (Gal)	Rate (Bbl/Hr)	Direction Of Flow	Secondary Containment Volume	
	Oil Storage (Sub	ject To Secon	dary Contains	ment Req	uirement)		
Gasoline Tank	Gasoline	Leak, Rupture	2000	Varies	Varies	>2000 Gal	
Diesel Tank	Diesel	Leak, Rupture	4,000	Varies	Varies	>3000 Gal	
Diesel Tank	Diesel	Leak, Rupture	850	Varies	Varies	>850 Gal	
Chemical Products Storage	Motor Oil	Leak, Rupture	110	Varies	Varies	>110 Gal	
Chemical Products Storage	Hydraulic Oil	Leak, Rupture	5,280	Varies	Varies	>5,280 Gal	
Oil -Filled	Operational Equipm	nent (Not Sub	ject To Secon	dary Cont	ainment Req	uirement)	
6-1	Heat Transfer Fluid (Therminol) VP-1 Overflow Tank	Leak, Rupture	57,000	Varies	Varies		
6-2	Heat Transfer Fluid (Therminol) VP-1 Overflow Tank	Leak, Rupture	57,000	Varies	Varies		
3-1	Heat Transfer Fluid Expansion Vessel	Leak, Rupture	9,245	Varies	Varies	Secondary Containment No Required	
3-2	Heat Transfer Fluid Expansion Vessel	Leak, Rupture	9,245	Varies	Varies		
3-3	Heat Transfer Fluid Expansion Vessel	Leak, Rupture	9,245	Varies	Varies		
3-4	Heat Transfer Fluid Expansion Vessel	Leak, Rupture	9,245	Varies	Varies		
Transformer Facility	Mineral Oil	Leak	9,800	Varies	Varies		
Hydraulic System	Hydraulic Oil	Leak	660	Varies	Varies		
Total Aggregate (Per Power Island)			161,440				

Date: **01/17/2024**

Version: **06**



	Location Information		Chemical Identification	
1a* CERSID	201 ChemicalLocation	203 MapNumber	205 ChemicalName	215
	Alpha and Beta plants	L003 and L004	Acetylene	LargestContainer 70
	Alpha and Beta Water Treatment Plants	L003 and L004	Amino Acid F Reagent	0.03
	Alpha and Beta Water Treatment Plants	L003 and L004	Amino Acid Reagent	0.03
10453255	Alpha and Beta water treatment plants	L003 and L004	Anionic Flocculant DWT 672E	5
	Alpha and Beta Water Treatment Plants	L003 and L004	Antiscalant Vitec 4000	528
	Alpha and Beta plants	L003 and L004	Argon, Liquid	
	Alpha and Beta Water Treatment Plants	L003 and L004	AWC- A110	528
	Alpha and Beta Cooling tower Chemical dosing Alpha and Beta Water Treatment Plants	L003 and L004	Betz Dearborn DCL30 Buffer Solution Hardness	50 0.03
	Alpha and Beta Water Treatment Plants	L003 and L004	CalVer 2 Calcium Indicator	0.03
	Alpha and Beta plants	L003 and L004	Carbon Dioxide	50
	Alpha and Beta Water Treatment Plants	L003 and L004	Carbon Dioxide, Liquid	34000
10453255	Alpha and Beta plants	L003 and L004	Carbonic acid sodium salt (1:2)	
	Alpha and Beta plants	L003 and L004	Carbonic dihydrazide	
10453255	Alpha and Beta Water Treatment Plants	L003 and L004	Chemets Dissolved Oxygen Refi	0.001
	Alpha and Beta Water Treatment Plants	L003 and L004	Citric Acid	55
	Alpha and Beta Water Treatment Plants	L003 and L004	Citric Acid Reagent Solution	0.03
	Alpha and Beta Water Treatment Plants	L003 and L004	Conductivity Standard Solution	0.05
	Alpha and Beta Water Treatment Blants	L003 and L004 L003 and L004	Cortrol OS5607	200 0.22
	Alpha and Beta Water Treatment Plants Alpha and Beta Water Treatment Plants	L003 and L004	DEHA 1 Reagent (Diethylhydrox DEHA 2 Reagent	0.22
	Alpha and Beta power blocks	L003 and L004	Diesel Exhaust Fluid - AdBlue	55
	Alpha and Beta	L003 and L004	Diesel Fuel	4000
	Alpha and Beta Water Treatment Plants	L003 and L004	Dihydroxy aluminum Sodium Ca	7660
	Alpha and Beta Water Treatment Plants	L003 and L004	DPD Free Chlorine Reagent	0.22
	Alpha and Beta plants	L003 and L004	EDTA, TETRASODIUM	0.001
10453255	Alpha and Beta Water Treatment Plants	L003 and L004	Ferric Chloride	792
	Alpha and Beta Water Treatment Plants	L003 and L004	FerroZine® Iron Reagent	0.13
	Alpha and Beta Cooling tower Chemical dosing		Flogard MS6209	200
	Alpha and Beta Transformers	L010	FR 3 Mineral oil	20
	Alpha and Beta plants	L003 and L004	Galvanizing Compound	2000
	Alpha plant only Alpha and Beta Cooling tower Chemical dosing	L003 and L004	Gasoline Gengard GN 8004	2000
	Alpha and Beta cooling tower Chemical dosing	L003 and L004	Glycerin	55
	Alpha and Beta Water Treatment Plants	L003 and L004	Hydrated Lime, Calcitic Hydrate	21664
	Alpha and Beta Water Treatment Plants	L003 and L004	Hydrochloric Acid	1
	Alpha and Beta power blocks	L003 and L004	Hydrogen Cylinders	4698
	Alpha and Beta	L010	Liquid Hazardous waste	55
10453255	Alpha and Beta solid waste. Located in Beta pl	L010	Solid Hazardous waste- Oily Rag	10
	Alpha and Beta solid waste- Beta Tab, Alpha W		Solid Hazardous waste- HTF Con	10
	Alpha and Beta liquid waste	L003 and L004	Liquid Hazardous waste stage ar	
	Alpha and Beta liquid waste	L003 and L004	Liquid Hazardous waste- Oily W	528
	Alpha and Beta liquid waste	L003 and L004	Liquid Hazardous waste- Used O	
	Alpha and Beta Water Treatment Blants	L003 and L004 L003 and L004	Liquid Nitrogen	26000 50000
	Alpha and Beta Water Treatment Plants Alpha and Beta Water Treatment Plants	L003 and L004	Magnesium Sulfate Molybdate 3 Reagent Solution	0.03
	Alpha and Beta Water Treatment Plants	L003 and L004	Molybdate Reagent	0.03
	Alpha and Beta power blocks	L003 and L004	Optisperse HP3100	200
	Alpha and Beta Water Treatment Plants	L003 and L004	ORP Solution	0.05
	Alpha and Beta plants	L003 and L004	Oxygen	140
	Alpha and Beta power blocks	L003 and L004	Paints	50
	Alpha and Beta power blocks	L003 and L004	Petroleum Hydrocarbon	55
	Alpha and Beta Water Treatment Plants	L003 and L004	pH Buffer Solution 10.01	0.13
	Alpha and Beta Water Treatment Plants	L003 and L004	pH Buffer Solution 4.01	0.13
	Alpha and Beta Water Treatment Plants	L003 and L004 L003 and L004	pH Buffer Solution 7.00	0.13 0.13
	Alpha and Beta Water Treatment Plants Alpha and Beta power blocks	L003 and L004	pH Storage Solution Phenol isobutylenated phospha	
	Alpha and Beta power blocks, solar fields	L003 and L004	Propane	17
	Alpha and Beta plants	L003 and L004	Propylene Glycol - HTF	55
	Alpha and Beta power blocks	L003 and L004	Lubricant Oil- Shell Omala S2 G	55
10453255	Alpha and Beta plants	L003 and L004	Silicon Powder	
	Alpha and Beta water treatment plants	L003 and L004	Sodium Bisulfite	528
	Alpha and Beta Water Treatment Plants	L003 and L004	Sodium EDTA	55
	Alpha and Beta Water Treatment Plants	L003 and L004	Sodium Hydroxide	528
	Alpha and Beta water treatment plants	L003 and L004	Sodium Hypochlorite	2640
	Alpha and Beta Cooling tower Chemical dosing Alpha and Beta solid waste		Sodium Hypochlorite Solid hazardous waste- batterie	1100 20
	Alpha and Beta solid waste	L003 and L004	Solid hazardous waste- batterie Solid hazardous waste stage are	20
	Alpha and Beta solid waste	L003 and L004	Solid hazardous waste- Broken I	10
	Alpha and Beta Cooling tower Chemical dosing		Spectrus BD 1500	200
	Alpha and Beta power blocks	L003 and L004	Steamate PAS6074	200
	Alpha and Beta Water Treatment Plants	L003 and L004	Sulfuric Acid	528
	Alpha and Beta plants	L003 and L004	Therminol Biphenyl	57000
	Water Treatment Plant	L003 and L005	AWC C-227	5
	Water Treatment Plant	L003 and L006	AWC C-209	5
	Alpha and Beta Plant		Sulfur Hexafluoride	129
	Alpha and Beta Plant		Coolant, Antifreeze	55 55
	Alpha and Beta Plant Alpha and Beta Plant		Duraclear DC-5-F Aqueous Film-Forming Foam 3%	55 350
	Alpha and Beta Plant		Argon Gas	336
	Alpha Chemical Storage Area		Fyrquel	55
	AlphaΒ Water Treatment Plant		RL9009	500
	AlphaΒ Water Treatment Plant		RL3400	528
	AlphaΒ Water Treatment Plant		RL2032	55
	AlphaΒ Water Treatment Plant		RL2000	55
10453255	AlphaΒ Water Treatment Plant		RL100	55
10453255			RL100	55
10453255 10453255	AlphaΒ Water Treatment Plant			
10453255 10453255 10453255	AlphaΒ Water Treatment Plant		P813E	5
10453255 10453255 10453255 10453255	AlphaΒ Water Treatment Plant AlphaΒ Cooling Tower		CT790	500
10453255 10453255 10453255 10453255 10453255	AlphaΒ Water Treatment Plant AlphaΒ Cooling Tower AlphaΒ Cooling Tower		CT790 CL5428	500 500
10453255 10453255 10453255 10453255 10453255 10453255	AlphaΒ Water Treatment Plant AlphaΒ Cooling Tower		CT790	500

654 Page **53** of **63**


Date: **01/17/2024**

Version: 06



APPENDIX C

MOJAVE SOLAR LLC CONTAINMENT DIAGRAMS

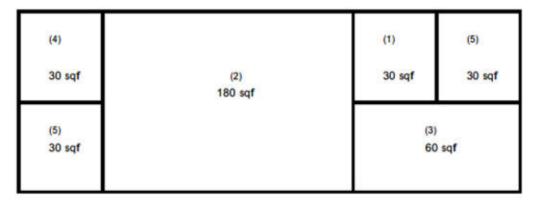


- 1- Ammonia; Carbohydrazide and Tri-phosphate
- 2- Inhibitor; Dispersant; Biodispersant; Bisulfite; Antiscalant RO; Coagulant and Flocculant
- 3- Sodium Hydroxide
- 4- Sulfuric Acid
- 5- Open

Total 360 sqf


Date: **01/17/2024**



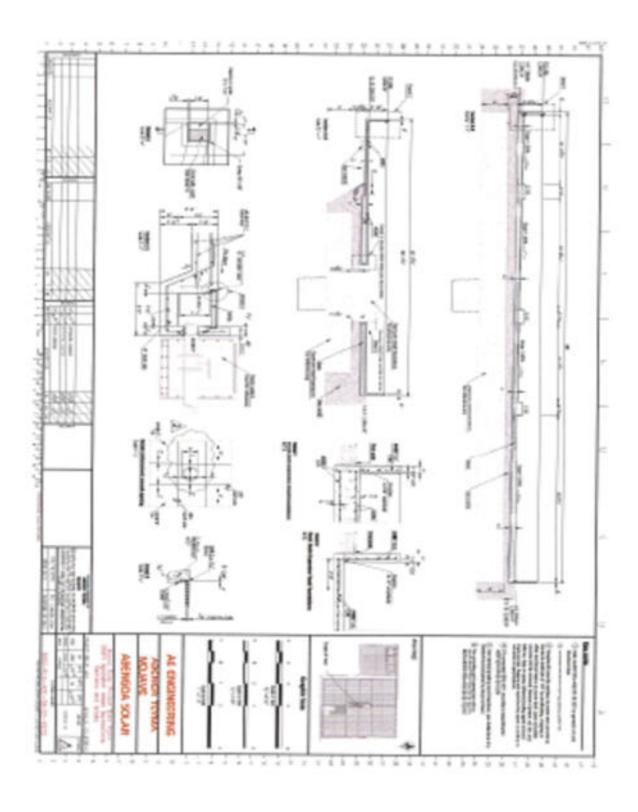


Date: **01/17/2024**



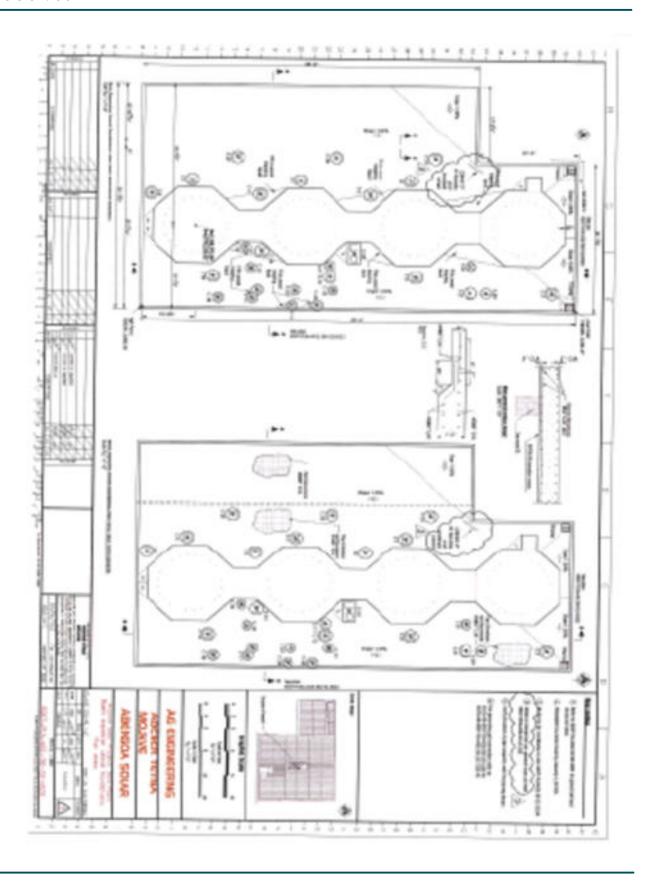

Date: **01/17/2024**



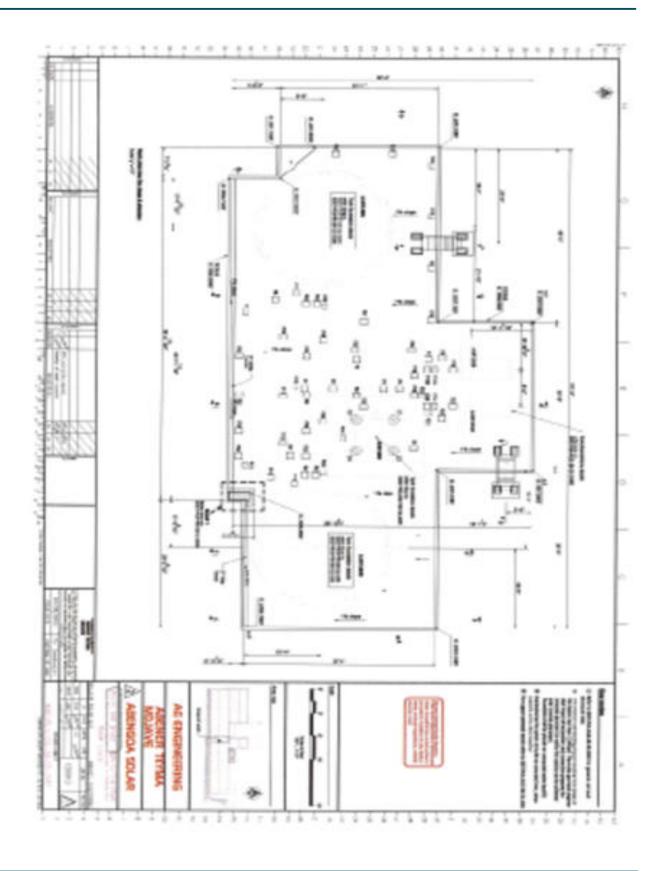

Date: **01/17/2024**

Version: 06



APPENDIX D-1

MOJAVE SOLAR PROJECT SPCC INSPECTION FORM

Mojave Solar LLC		
	SPCC INSPECTION CHECKLIST	
Date of Inspection	FACILITY	

Inspection Item/Area	What to Look For	Check if no problems or N/A if Not Applicable	Problems (be specific)
Drainage ditches	oil or oil-contaminated soil		
Road ditches	oil or oil-contaminated soil		
Material handling areas (loading/unloading areas)			
Hazardous Waste storage areas	pollutants/spills/, deterioration of containers		
Tanks/gauge settings	deterioration and maintenance needs, leaks		
	Drip marks		
	Discoloration of tanks		
	Puddles containing stored material		
	Corresion		
	Cracks		
	Localized dead vegetation		
Tank Foundations	Cracks		
Paris, Pourioaports	Discolorations		
	Puddles containing stored material		
	Settling		
	Gaps between tank and foundation		
	Damage caused by vegetation roots		
Tank piping	Droplets of stored material		
rank piping	Discoloration		
	Corresion		
	Bowing of pipe between supports		
	Evidence of stored material see page on valves or seals		
	Localized dead vegetation		
Above ground valves & pipelines	oil or oil-contaminated soil maintenance needs, leaks		
Berms and secondary containment	wall integrity/erosion, accumulated liquids		
	Level or precipitation in dike/available capacity		
	Operational status of drainage valves	_	
	Dike or berm permeability		
	Debris		
	Erosion		
	Permeability of the earthen floor of diked area		
	Location/status ofpipes, inlets, drainage beneath tanks, etc.		
	Cracks		
I	Location/status of pipes inlets drainage beneath		
	Cracks		
	Discoloration		
	Presence of stored material (standing liquid)		
	Corrosion		
	Stressed vegetation		
COMMENTS:	*******		
			_
Inspector Signature !	Supervisor Date:		

659 Page **58** of **63**

Date: 01/17/2024

Version: 06



APPENDIX D-2

MOJAVE SOLAR PROJECT INSPECTION CHECKLIST



STI SP001 Monthly Inspection Checklist

General Inspection Information:

Inspection Date: Alpha/Beta Plant Inspector Name (print):	Prior Inspection Date:	Retain until date:
Inspector's Signature		
Tank(s) inspected ID		
Regulatory facility name and ID number (if applicable)		

Inspection Guidance:

- This checklist is intended as a model. Locally developed checklists are acceptable as long as they are substantially equivalent (as applicable). Inspections of multiple tanks may be captured on one form as long as the tanks are substantially the same.
- > For equipment not included in this Standard, follow the manufacturer recommended inspection/testing schedules and procedures.
- The periodic AST Inspection is intended for monitoring the external AST condition and its containment structure. This visual inspection does not require a Certified Inspector. It shall be performed by an owner's inspector per paragraph 4.1.2 of the standard.
- Upon discovery of water in the primary tank, secondary containment area, interstice, or spill container, remove promptly or take other corrective action. Inspect the liquid for regulated products or other contaminants and dispose of properly.
- Non-conforming items important to tank or containment integrity require evaluation by an engineer experienced in AST design, a Certified Inspector, or a tank manufacturer who will determine the corrective action. Note the non-conformance and corresponding corrective action in the comment section.
- > Retain the completed checklists for at least 36 months.
- After severe weather (snow, ice, wind storms) or maintenance (such as coating) that could affect the operation of critical components (normal and emergency vents, valves), an inspection of these components is required as soon as the equipment is safely accessible after the event.

STI SP001 Monthly Inspection Checklist

Rev 1.0 02/20/2020 Page 1 of 4

Doc # FO-0&M-MJV-018

Date: **01/17/2024**

Version: **06**





ITEM	STATUS	COMMENTS / DATE CORRECTED
	Tank and Piping	1
Is tank exterior (roof, shell, heads, bottom, connections, fittings, valves, leaks? Note: If "No", identify tank and describe leak and actions taken.	etc.) free of visible	
2 Is the tank liquid level gauge legible and in good working condition?	□Yes □No □N/A	
Is the area around the tank (concrete surfaces, ground, containment, signs of leakage?	etc.) free of visible	
Is the primary tank free of water or has another preventative measure be	een taken?	
NOTE: Refer to paragraphs 6.10 and 6.11 of the standard for alternative N/A is only appropriate for these alternatives.	s for Category 1 tanks.	
For double-wall or double bottom tanks or CE-ASTs, is interstitial mo (where applicable) in good working condition?	nitoring equipment	
For double-wall tanks or double bottom tanks or CE-ASTs, is interstice Remove the liquid if it is found. If tank product is found, investigate po	DYRE DNO DNA	
	Equipment on tank	
7 If overfill equipment has a "test" button, does it activate the audib		
Is overfill prevention equipment in good working condition? If it is ed mechanical test mechanism, actuate the mechanism to confirm op		
Is the spill container (spill bucket) empty, free of visible leaks and in go condition?	ood working □ Yes □ No □ N/A	

STI SP001 Monthly Inspection Checklist

Rev 1.0 02/20/2020 Page 2 of 4

Doc # FO-O&M-MJV-018

Date: **01/17/2024**

Version: **06**



Atlantica Sustainable Infrastructure

	//								
10	Are piping connections to the tank (valves, fittings, pumps, etc.) free of visible leaks? Note: If "No", identify location and describe leak.	□ Yes □ No							
11	Do the ladders/platforms/walkways appear to be secure with no sign of severe corrosion or damage?	□ Yes □ No □ N/A							
	Containment (Diking	/Impounding)							
12	Is the containment free of excess liquid, debris, cracks, corrosion, erosion, fire hazards and other integrity issues?	□ Yes □ No □ N/A							
13	Are dike drain valves closed and in good working condition?	□ Yes □ No □ N/A							
14	Are containment egress pathways clear and any gates/doors operable?	□ Yes □ No □ N/A							
	Concrete Exterior AST (CE-AST)								
15	Inspect all sides for cracks in concrete. Are there any cracks in the concrete exterior larger than 1/16?	□Yes □No □N/A							
16	Inspect concrete exterior body of the tank for cleanliness, need of coating, or rusting where applicable. Tank exterior in acceptable condition?	□Yes □No □N/A							
17	Visual inspect all tank top openings including nipples, manways, tank top overfill containers, and leak detection tubes. Is the sealant between all tank top openings and concrete intact and in good condition?	□Yes □No □N/A							
	Other Condit	tions							
18	Is the system free of any other conditions that need to be addressed for continued safe operation?	□ Yes □ No							

	Ac	ldit	ion	al (Com	ıme	ent	S
--	----	------	-----	------	-----	-----	-----	---

STI SP001 Monthly Inspection Checklist

Rev 1.0 02/20/2020 Page 3 of 4

Doc # FO-0&M-MJV-018

Date: **01/17/2024**

Version: **06**



Atlantica Sustainable Infrastructure			
-			

STI SP001 Monthly Inspection Checklist

Rev 1.0 02/20/2020 Page 4 of 4

Doc # FO-0&M-MJV-018

Date: **01/17/2024**

Version: 06



APPENDIX E

REFERENCES

- ¹ Abeinsa EPC Mojave, <u>Mojave Solar Project-</u> <u>Draft Spill Prevention, Control and Countermeasure Plan</u>
- ¹ California Energy Commission, <u>Environmental Assessment- Abengoa Mojave Solar Application For Certification (09-AFC-5) San Bernardino County, March 2010 pg. 3-9; (www.energy.ca.gov/2010publications/CEC; website accessed on 8/27/13)</u>

¹ IBID pgs. 3-10 (Section 3-Project Description).

¹ AG Engineering-Abengoa Solar Central Plant Layout Alpha Plant (Facility Diagram dated 4/22/13).

Date: **01/22/2024**

Version: **07**



Process Safety Management Plan, Rev 7

S	P-	-(3(אַן	V	- [Λl.	J۱	/-	0	8	7																												
•	4	•	_		•		•		•		•		•		•		_		•		•		•		•		•		•			_		•		•		•		•
	•		•	•		•		•		•		•		•		•		•		•		•		•		•		•		•	4		•		•		•		•	
•	4	•	•		•		•		•		•		•		•		•		•		•		•		•		_		•		•	•		•		•		•		•
	•		•	•		•		•		•		•		•		•		•		•		•		•		•		_		•	4		•		•		•		•	
•	4	•	•		•		•		•		•		•		•		•		•		•		•		•		•		•			•		•		•		•		•
	•		•	_		•		•		•		•		•		•		•		•		•		•		•		_		•	4		•		•		•		_	
•	4	•	_		•		•		•		•		•		•		•		•		•		•		_		•		•		•	_		•		•		•		•
	•		•	•		•		•		•		•		•		•		•		•		•		•		•		_		•	4		•		•		•		_	
•	4	•	_		•		•		_		•		•		•		•		•		•		•		•		_		•			_		•		•		•		•
	•	_	•	_		•		•		_		•		•		•		_		•		•		•		_		_		_	4		•		•		•		•	
•		•	_		•		•		_		•		•		•		•		•		•		•		•		_		•		•	_		•		•		_		_
	•		•	•		•		_		•		_		_		_		•		•		•		_		_		_		•	4		•		•		•		_	
•		•	_		•		_		•		_		_		_		_		_		_		_		_		_		•		•	_		•		•		_		_
	•		•	_		•		•		_		•		•		•		_		•		•		•		•		•		•	_		•		•		•		_	
•		•	_		•		•		•		•		•		•		•		•		•		•		•		_		•			_		•		•		•		•
	•		•	•		•		•		_		•		•		•		_		•		•		_		•		•		•	_		•		•		•		•	
			_								•				•															_		_								_
				•																										•			•		•		•		•	
			_																																	•		_		_

Process Safety Management Plan, Rev 7

Date: **01/22/2024**



Revision	Date	Reason for Revision								
00	08/01/2013	Initial Release								
01	09/04/2013	Update								
02	10/07/2013	Update								
03	01/24/2014	Clarification of referenced material and response to completion of PHA								
04	11/01/2018	Update and general review. Company code. ASIO/Mojave Solar LLC companies included								
05	02/03/2020	Update to ASI Corporate fonts and Logos. MEL – Applies to all documents included in this plan								
06	09/09/2021	DOC# updated								
07	01/19/2024	General Review								

Produced by:	Department	Date				
Fred Hrenchir	Abangaa Salar	00/04/2042				
Jose Manuel Bravo	Abengoa Solar	08/01/2013				

Reviewed by:	Department	Date
Mahnaz Ghamati	Quality,Environmental Compliance	01/19/2024
Margaret Aguirre	Health and Safety	1/22/2024

Approved by:	Department	Date
David Rosas	Plant Manager	01/22/2024

Process Safety Management Plan, Rev 7

Date: **01/22/2024**

Version: **07**



Contents

1	Objecti	ive	5
2	Definiti	ions	5
3	Introdu	uction	6
	3.1 Emp	oloyee Participation	6
	3.1.1	Accident Investigation	6
	3.1.2	Work Permitting – Hot Work Permits	6
	3.1.3	Management of Change (MOC)	7
	3.1.4	Pre-Startup Safety Review	7
	3.1.5	Procedure Development	7
	3.1.6	Process Hazard Analysis	7
	3.1.7	Safety and Health Committee	7
	3.1.8	Safety Inspection/Audits	7
	3.1.9	Safety Meetings	8
	3.1.10	Safety Suggestions	8
	3.1.11	Stop Work Authority	8
	3.2 Prod	cess Safety Information	8
	3.2.1	Information pertaining to the hazards of the chemicals	8
	3.2.2	Information pertaining to the technology	8
	3.2.3	Information Pertaining to the Equipment	9
	3.2.4	Process Flow Diagrams	9
	3.2.5	Process Chemistry	9
	3.2.6	Maximum Intended Inventory	9
	3.2.7	Safe Upper and Lower Limits	9
	3.2.8	Consequences of Deviation	9
	3.2.9	Materials of Construction	10
	3.2.10	Piping and Instrument Diagrams (P&IDs)	10
	3 2 11	Flectrical Area Classification and Ventilation System	10

Process Safety Management Plan, Rev 7

Date: **01/22/2024**



	3.	2.12	Relief System Design and Design Basis	10
	3.	2.13	Design Codes and Standards Employed	10
	3.	2.14	Material and Energy Balances	10
	3.	2.15	Safety Systems	10
3	3.3	Proc	ess Hazard Analysis	11
3	3.4	Ope	rating Procedures	12
3	3.5	Trair	ning	12
3	3.6	Cont	tract Safety	13
3	3.7	Pre-	Start up Safety Plan	13
3	3.8	Mec	hanical Integrity	14
	3.	8.1	Application	15
	3.	8.2	Deficiencies	15
	3.	8.3	Repair Parts	15
	3.	8.4	Mechanical Integrity Procedure	15
	3.	8.5	Management of Change	15
	3.	8.6	Record Keeping	15
	3.	8.7	Training	16
4	Н	ealth,	Safety and Environmental	16
5	Α	ppend	dix	16

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: **07**



1 Objective

This document generally covers policies of the Mojave Solar Project (referred to as the Facility) designed to carry out elements of Process Safety Management (PSM) to meet the requirement of the California Energy Commission (CEC) Adoption Order HAZ-2.

The Scope and purpose of PSM is preventing or minimizing the consequences of catastrophic releases of toxic, reactive, flammable, or explosive chemicals. The establishment of the process safety management process is intended to eliminate to a substantial degree, the risks to which employees are exposed to at the Facility.

The 15 elements covered in this Plan are:

- 1. Employee Participation
- 2. Process Safety Information
- 3. Process Hazard Analysis
- 4. Operating Procedures
- 5. Training
- 6. Contractor Safety
- 7. Pre-Start up Safety Review
- 8. Mechanical Integrity
- 10. Management of Change
- 11. Incident Investigation
- 12. Emergency Planning and Response
- 13. Compliance Audits
- 14. Trade Secrets

Each element provides the actions that will be performed, by whom and who has the responsibility to see that the actions are completed. These elements will reference several Facility procedures and documents that will verify compliance with this plan.

areas and persons affected.

2 Definitions

CCR- California Code of Regulations

CFR- Code of Federal Regulations

IIPP- Injury and Illness Prevention Program

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: 07



MOC- Management of Change

O/O- Owner/Operator

PSM- Process Safety Management

PSSR- Pre Startup Safety Review

3 Introduction

The Facility is committed to providing a safe and healthy workplace for employees, contractors and the surrounding community. In order to meet this goal, it is critical that employees participate in the facility's safety process. Additional information regarding each of the processes can be found in the Facility's Health, Safety and Environmental Program and the Process Safety Management Plan. All safety information is available to all personnel, whether employees or contractors, who work at the facility. If trade secrets are involved in the process, the information will be available to personnel as described in the Trade Secret Element of the PSM Program.

3.1 Employee Participation

This section summaries the processes which allow employees to participate in safety processes such as Process Hazard Analysis, Management of Change, Pre-Safety Startup Review, Accident Investigations, work permitting – Hot Work Permits, Management of Change, etc. Employees and contractors are encouraged and have the right to bring up unsafe or safe situation to management's attention without the fear of discipline or discriminatory actions.

3.1.1 Accident Investigation

Employees will participate in the investigation of PSM incidents. As part of the program a peer employee with relevant experience in the work process, which was involved in the incident, will participate as a member of the investigation team. A subcontractor representative is required to participate with the investigation team for any incident involving a subcontractor. (Refer to PSM Element 11 Incident Investigation for further details).

3.1.2 Work Permitting – Hot Work Permits

Issuing Hot Work Permits inside the facility is a key method of providing a safe work environment. Hot Work shall be issued by Operations personnel after all the condition of the permit has been met. (Refer to PSM Element 9 Hot Work Permit for further details.)

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: **07**



3.1.3 Management of Change (MOC)

Employee participation is covered under PSM Element 10 Management of Change (MOC). MOC is implemented to manage changes whenever there is a change or changes (except for "replacement in kind") to process chemicals, technology, and equipment, and changes to facilities. The Employees covered by the process shall be informed of and trained in the changes to the process as early as practicable prior to its start up, and during Plant operational stage.

3.1.4 Pre-Startup Safety Review

Pre-Start up Safety Reviews shall involve employees with expertise in process operations and engineering. The employees will be selected based upon their experience and understanding of the process systems being evaluated. {Refer to PSM Element 7 Pre-Startup Safety Review (PSSR) for further details}

3.1.5 Procedure Development

Specialized procedure will be developed by Subject Matter Experts (SME), reviewed by the Engineering Department, and approved by Management. Operating procedures will be developed in the same manner with the review of operations personnel.

3.1.6 Process Hazard Analysis

The process hazard analysis will be performed by a team with expertise in engineering and process operations, and the team will include at least one operating employee who has experience and knowledge specific to the process being evaluated. The team will also include one member knowledgeable in the specific process hazard analysis methodology being used. The final report containing the results of the hazard analysis for each process will be available in the respective work area for review by any person working in that area. (Refer to PSM Element 4 Process Hazard Analysis for further details).

3.1.7 Safety and Health Committee

A Safety and Health Committee will meet at least monthly as described in the Safety Plan. Refer to section 4.3 of the Injury, Illness, and Prevention Program (IIPP) for the details of the committee).

3.1.8 Safety Inspection/Audits

To help ensure a safe work environment, the Facility has implemented a safety inspection/audit process whereby employees, management and contractor personnel will perform field safety inspections. When at risk situations are discovered the supervisor responsible for the area in which the at-risk situation was discovered shall be informed of the situation and correct the situation as described in the Safety Inspection/audit section of the facility Safety Plan.

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: 07



3.1.9 Safety Meetings

Safety Meetings are effective methods of communicating and sharing safety information among all personnel working at the Facility. Safety Meetings will be presented, attended and documented.

3.1.10 Safety Suggestions

All personnel working at the Mojave Solar LLC facility are encouraged to provide management with safety suggestions. The suggestions can be presented through any means of communication. The suggestions can be submitted anomalously and will be handled in the appropriate manner to properly address the suggestion.

3.1.11 Stop Work Authority

All personnel are encouraged to stop any unsafe or perceived unsafe situation. The personnel applying the Stop Work Authority shall not be subject to disciplinary actions for their actions to prevent a safety incident.

3.2 Process Safety Information

The purpose of written process safety information is to enable personnel to identify and understand any hazards posed by the process. Hard or electronic copies of this information shall be accessible to all employees who perform any duties in or near the process.

3.2.1 Information pertaining to the hazards of the chemicals

As a minimum this information shall consist of the following:

Toxicity information

Permissible exposure limits

Physical data

Reactivity data

Corrosivity data

Thermal and chemical stability data, and

Hazardous effects of inadvertent mixing of different materials that could possibly occur. Safety Data Sheets (SDS) have been used to comply with this requirement.

3.2.2 Information pertaining to the technology.

The following process technology information shall be maintained for each covered process. An overview of the process, including the process chemistry; Maximum intended inventory located in the HMBP; Safe upper and lower limits for temperatures, pressures, flows and compositions; An evaluation of the consequences of deviations including those affecting the safety and health of the employees. Operating Manual and Process Hazard Analysis Report are used to satisfy this requirement.

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: 07



3.2.3 Information Pertaining to the Equipment

The following drawings/information regarding the HTF, Water Treatment and Steam Generating processes are in the PSM Information binders:

Piping & instrument diagrams (P&IDs)

Plot plans or equivalent method of documenting relative spacing

Electrical area classification, documented on drawing(s) or other written materials.

Shutdown and interlock diagrams

Building or enclosure ventilation design basis.

Fire and gas detection details, including monitor location, upper and lower monitor detection limits, detectable gases, etc. Also included in this section are the locations and descriptions of beacons or horns associated with these devices.

Active fire systems (fire water systems, deluge systems, dry chemical, foam, and mobile or hand-held extinguishers, etc.).

Passive fire systems (fire walls, dikes, fire protection insulation, etc.)

Other safety systems such as emergency notification, uninterruptible power supply, etc.

Equipment specification data sheets shall include the information as required per design code.

3.2.4 Process Flow Diagrams

Process flow diagrams of the Facility will be available for inspection in the master drawing books and as electronic drawing files. The master drawing books are in the Operations/Control Building.

3.2.5 Process Chemistry

Several treatment chemicals are used in production of boiler feedwater, cooling tower control, and the clarifier system (zero water discharge). Applicable information is explained in the package vendor data books.

3.2.6 Maximum Intended Inventory

Calculations of maximum intended inventories within the plant have been developed. These calculations are available for inspection in the Operations/Control Building and are included in the Hazardous Material Business Plan (HMBP).

3.2.7 Safe Upper and Lower Limits

The design basis for the equipment is considered to be the safe upper and lower limits. Safe upper and lower limits are implemented into the Distributed Control System alarm set points and interlocks.

3.2.8 Consequences of Deviation

Consequences of deviation from normal operations shall be analyzed in the process hazards analyses. Those consequences that could affect the safety and health of personnel or cause

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: 07



equipment damage shall be addressed by implementing engineering, administrative controls, and/or Personal Protective Equipment (PPE)

Engineering controls consist of alarms, shutdowns, relief valves, etc. Administrative controls consist of operating procedures and training for operations personnel. PPE consist of equipment such as eye, hand, foot, and hearing protection. These are documented in the PHA (Process Hazard Analysis).

3.2.9 Materials of Construction

The equipment manufacturer's data books and various catalogs provided by vendors contain information about materials of construction for specific equipment. This information can also be located in the PSM Information binders.

3.2.10 Piping and Instrument Diagrams (P&IDs)

A complete set of P&IDs is available for inspection in the master drawing books and as electronic drawing files. The master drawing books are located in the Operations/Control Building. These drawings are maintained by operations personnel and occasionally updated using a CAD program.

3.2.11 Electrical Area Classification and Ventilation System

Electrical area classifications have been established for the plant. These classifications may be found in the Master set of plant drawings located along with the other process safety information located in the Operations/Control Building.

3.2.12 Relief System Design and Design Basis

A review of the relief system design should be conducted in conjunction with the PHAs. (See PSM Information Binder under Relief System Design)

3.2.13 Design Codes and Standards Employed

Design and construction of all process equipment has been conducted according to generally recognized, good engineering practices. Specific codes and standards may be found in individual equipment files or equipment manuals.

3.2.14 Material and Energy Balances

Material and energy balances are not required, as they would be in a plant with chemical change or separations of feeds into product streams. The process equipment is grouped into (a) HTF circulating system, (b) boiler feedwater and steam circulating system, and (c) cooling tower circulating system. There are no net feeds (except well water) and no net products (except sludge). Flow rates can be determined form Pump data on the P&ID's, and boiler/heat exchanger duties can also be read from equipment descriptions on the P&ID's.

3.2.15 Safety Systems

Alarm and shutdown system information is available in the Operating Manuals. The Operations Manuals are kept in the Operations/Control Building.

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: 07



3.3 Process Hazard Analysis

The processes that are covered under the Process Hazard Analysis are the Steam Generation area, the Heat Transfer Fluid (HTF) system, and the chemical treatment portions of the Utilities area. The results of the PHA will be located in the PHA binder with recommendations and action sheets.

Each hazard analysis shall address:

- · The hazards of the process;
- Engineering and administrative controls applicable to the hazards and their relationships;
- · Consequences of failure of these controls;
- · Facility Siting;
- · Human Factors;
- A qualitative evaluation of a range of the possible safety and health effects of the failure of controls on facility employees; and
- The identification of any previous incident which had a likely potential for catastrophic consequences in the workplace.

The process hazard analysis will be performed by a team with expertise in engineering and process operations. The team shall include at least one operating employee who has experience and knowledge specific to the process being evaluated. The team shall also include one member knowledgeable in the specific process hazard analysis methodology being used. The final report containing the results of the hazard analysis for each process shall be available in the respective work area for review by any person working in that area.

Affected employees and where appropriate their recognized representatives shall be consulted on the development and conduct of hazard assessments performed at the facility. Affected employees and where applicable their representatives shall be provided access to the records required by this section.

The Facility or its designated contractor shall promptly address the team's findings and recommendations; document any actions taken to implement the team's recommendations; develop a written schedule of when these actions are to be completed; assure that the recommendations are resolved in a timely manner; make them available to operating, maintenance and any other persons whose work assignments are in the facility, and who are

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: **07**



affected by the recommendations or actions; and assure that the recommendations are evaluated in a timely manner or implement an alternative resolution which appropriately addresses the degree of hazard posed by the scenario.

3.4 Operating Procedures

Operating procedures are to provide clear instructions for safely conducting activities involved in the Heat Transfer Fluid (HTF), Steam Generation, Water Treatment and Utilities processes consistent with the process safety information (PSI).

Operating procedures have been developed for operating the Facility's process equipment before they are placed into service. These procedures include Operational Job Tasks and Safety and Health Procedures. A copy of the operating procedures is retained in a series of manuals. The Facility Operations Supervisor is responsible for maintaining and implementing the operating procedures.

In addition, the facility Operations Supervisor will maintain a master file of operating procedures kept in the Operations/Control Building. It is the responsibility of the Operators to advise the Supervisor of any changes.

The Operations procedures will be reviewed on an annual basis to ensure they reflect current practices, including adjustments that result from changes in process chemicals, technology, equipment, and to the facility.

The facility Operations Supervisor will annually certify that the operating procedures are current and accurate. The certification will be maintained on file at the facility.

Safe work practices that provide for the control of hazards during certain operations can be located in the following sections for facilities safety program:

- Hot Work Permit Procedures
- Lockout and Tagout Program
- Confined Space Entry Program
- Security and Access Control Practices

3.5 Training

Operational training for this facility will be accomplished utilizing computerized training, Classroom setting, video and/or one-on-one system.

Each employee presently involved in operating or maintaining a process, and each employee before working in a newly assigned process, shall be trained in an overview of the process and in the operating procedures for the process they will be assigned to work.

Refresher training will be provided at least every three years and more often if necessary. Refresher and supplemental training shall be provided to each maintenance or operating employee and other workers necessary to ensure safe operation of the facility. The Facility in

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: **07**



consultation with employees involved in operation or maintenance of a process shall determine the appropriate frequency of refresher training.

All employees involved in operation or maintenance of a process shall receive and successfully complete training for the processes in which they will be assigned to work. Each employee shall receive a certificate for completing the initial or refresher training and passing the required testing. The certification record shall contain the identity of the employee, the date of training, and the signatures of the persons administering the training.

3.6 Contract Safety

Prior to performing work at the Facility, the Purchasing Department will be responsible for the evaluation of contractors being considered for work at the facility. The contractor's safety programs, and performance shall be considered in this evaluation process.

Contractors shall be required to participate in the facility's security program. Contractors must sign in and sign out at the front desk daily. Those contractors with long-period contracts, will be issued identification badges to enter and exit the facility. Before starting work in processes areas, the contractor employees must communicate with the area operator.

An overview of the PSM covered process will be provided to the contract personnel before beginning work in or around the PSM covered process. This overview shall address the known potential fire, explosion, or toxic release hazards that a contractor may encounter. The overview shall also explain the provisions of the emergency plan which are applicable to the contractor. Contractors are required to follow all the Facility's established safe work practices while performing their services at the facility.

The safety performance of contract companies used on what might be considered a regular basis shall be periodically evaluated. The results of the evaluation shall be communicated to the contractor and the contractor shall be responsible to address the items of concern within a reasonable period of notification for the items.

All contractor injuries or illnesses shall be investigated and recorded using the Facility Incident Investigation Program. If the incident involves a PHA covered process, the contractor will assign one of its employees to participate on the PSM investigation team.

3.7 Pre-Start up Safety Plan

The Pre-Startup Safety Review (PSSR) is performed for new facilities, or modified facilities when the modifications are significant enough to require changes to be made in the written process safety information (See document 'MOC Program').

Employee Involvement: The Pre-Startup Safety Review involves employees with expertise in operations, engineering, and maintenance if their expertise is required. The employees will be selected based upon their experience and understanding of the process systems being evaluated. For example, a change consisting of a new bleeder may require only basic understanding of pipe specifications, while a new meter/control installation may require the

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: **07**



services of an instrument/ control tech to verify correct installation and operation. The PSSR review takes place prior to starting-up new or modified facilities, and shall confirm that:

- Construction and equipment are in accordance with design specifications.
- Safety, operating, maintenance and emergency procedures are in place and are adequate.
- For new facilities, a process hazard analysis has been performed and recommendations have been resolved or implemented before startup.
- Modified facilities meet the requirements of Management of Change.
- Training of each employee involved in operating a process has been completed.

The employee selected to complete the PSSR Checklist will review each item on the list. If the item is properly addressed, they will sign each item of the checklist. If the item has not been properly addressed the employee is to write a "comment" on the list and bring up the situation to their supervisor to have the item corrected. The final signature signifying that all checklist items are complete will be provided by the MOC Coordinator.

3.8 Mechanical Integrity

The program is based on recommended practices of the AICHE (American Institute of Chemical Engineers) and other industry organizations for chemicals at or above specified threshold quantities greater than 10,000 pounds in one location.

This Mechanical Integrity (MI) program addresses maintenance requirements for equipment, piping, instruments, and electrical in the following areas: the Facility Heat Transfer Fuel, Steam Turbine Generation Loop, Turbine Generator, Water Treatment and Utility Systems. The purpose of the program is to assure that equipment used to process, store, or handle hazardous chemicals is properly designed, constructed, installed and maintained to minimize the risk of releases. The primary focus of the MI program will be preventative, incorporating scheduled maintenance, corrosion monitoring, quality assurance of materials and installation. The program includes employee training.

Copies of this program can be found in the Control Building (Alpha and Beta) and will be accessible to all facility employees. The attached Mechanical Integrity Profile (MIP) identifies the major equipment groups and the proposed maintenance frequency.

The Maintenance Manager is responsible for implementing the Mechanical Integrity program.

The frequency of inspections and tests of process equipment shall be consistent with applicable manufacturer's recommendations and good engineering practices. Inspection and test frequency may vary from manufacturer's recommendation if the operating experience with the equipment demonstrates the need for more or less frequent inspections.

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: 07



3.8.1 Application

The requirements of this Mechanical Integrity Program apply to the following process equipment:

- Pressure vessels and storage tanks
- Piping systems (including piping components such as valves)
- Relief and vent systems and devices
- Emergency shutdown systems
- Controls (including monitoring devices and sensors, alarms and interlocks)
- Electrical equipment for power, controls, and lights.

3.8.2 Deficiencies

Deficiencies in equipment, which are outside acceptable limits, shall be corrected before further use or in a safe and timely manner when necessary means are taken to assure safe operation. Acceptable limits are defined in the Process Hazard Analysis, the supporting calculations and design information and in the facility engineering files, which combine to constitute the facility Process Safety Information.

3.8.3 Repair Parts

The Maintenance Manager shall assure that maintenance materials, spare parts, and equipment are suitable for the process application for which they will be used.

3.8.4 Mechanical Integrity Procedure

The Maintenance Manager will schedule and issue non- routing work orders for maintenance activities. The work order will specify who is responsible for carrying out each inspection or maintenance task. The documentation of the task shall include the date of inspection, equipment name, serial number of the equipment, the name of the person who performed the inspection or test, and the results of the inspection or test. The attached Mechanical Integrity Profile shall be followed to fulfill inspection and testing requirements. After the maintenance task or inspection is completed, the records will be kept according to the Facility's document retention policy.

3.8.5 Management of Change

The Maintenance Manager will assure the suitability of material and equipment for the construction of new facilities or the replacement of equipment. This assurance is provided under the Management of Change/Pre-Start up Safety Review.

3.8.6 Record Keeping

Documentation of inspections and maintenance will be maintained onsite. The records are maintained and stored by the Facility. The documentation shall identify:

• The date of the inspection.

Process Safety Management Plan, Rev 7

Date: 01/22/2024

Version: 07



- The name of the person who performed the inspection or test.
- The serial number or other identifier of the equipment on which the inspection or test was performed.
- The results of the inspection or test.

3.8.7 Training

Training will be provided to each employee involved in maintaining the on-going integrity of process equipment in the following:

- An overview of the process and its hazards.
- Procedures applicable to the employee's job tasks to assure that the employee can perform the job tasks in a safe manner.
- Certification for employees doing non-destructive tests, welding, etc.

4 Health, Safety and Environmental

All tasks described in this procedure must be implemented according with the specific safety directives and procedures existing in Atlantica Sustainable Infrastructure and following safety standards established on site where it performs works.

Likewise, hazards and preventive measures established in actual Workplace Hazard Assessment for the staff involved will be considered.

5 Appendix

Here is the list of safety procedures.

GP-O&M-MJV-011	Safe Work Permit Process
SP-O&M-MJV-005	Vehicle Maintenance Safety Procedure
SP-O&M-MJV-007	Document Information Procedure
SP-O&M-MJV-014	Nonconformity & Corrective Action
SP-O&M-MJV-015	Regulations, Information & Compliance
SP-O&M-MJV-016	Training and Competence
SP-O&M-MJV-085	Personal Electronic Device Policy
SP-O&M-MJV-086	Operations Injury Illness Prevention Program - IIPP
SP-O&M-MJV-087	Process Safety Management Plan
SP-O&M-MJV-088	Health General Procedure
SP-O&M-MJV-089	PPE Collective protection and Work Equipment General Procedure
SP-O&M-MJV-090	Access Control General Procedure
SP-O&M-MJV-092	Safety Clearance Lockout & Tag Out Procedure LOTO
	Boom Lift Works close to High Voltage Lines - Procedure for
SP-O&M-MJV-093	Grounding a Boom Lift
SP-O&M-MJV-094	MSLLC Employees working alone

Process Safety Management Plan, Rev 7

Date: **01/22/2024**



SP-O&M-MJV-095	MSLLC Radio Communication
SP-O&M-MJV-158	Fire Protection System Maintenance
SP-O&M-MJV-160	Safety Committee Bylaws
SP-O&M-MJV-161	Hearing Conservation Written Program
SP-O&M-MJV-162	Site Specific Orientation
SP-O&M-MJV-163	Confined Space Procedure
SP-O&M-MJV-164	Confined Space Watch
SP-O&M-MJV-165	MSLLC Emergency Response and Preparedness Plan
SP-O&M-MJV-166	Heat Stress Protection Procedure
SP-O&M-MJV-167	Safety Rules
SP-O&M-MJV-168	Risk Assessment
SP-O&M-MJV-169	Works with HTF
SP-O&M-MJV-170	Accident Investigation Procedure
SP-O&M-MJV-171	H&S Reports in Solar Plants
SP-O&M-MJV-172	Heat Stroke Prevention
SP-O&M-MJV-173	Hot Works Procedure
SP-O&M-MJV-174	Work at Height
SP-O&M-MJV-175	Weekly Fire Pump Checks
SP-O&M-MJV-176	Weekly Safety Shower Check
SP-O&M-MJV-177	Lightning Mitigation Plan (CEC Approved)
SP-O&M-MJV-178	Fire Suppression System Impairment Communication Plan
SP-O&M-MJV-179	Seismic Event Response Procedure
SP-O&M-MJV-180	Emergency shut down Procedure
SP-O&M-MJV-186	Working over or near water rescue Plan
SP-O&M-MJV-218	Preventive culture
SP-O&M-MJV-224	Emergency Drill Guideline-Medical Emergency Requiring EMS
SP-O&M-MJV-229	Emergency Drill Guideline-Fire in Electrical/MCC Room
SP-O&M-MJV-263	Employee Improvement Incentive Program
SP-O&M-MJV-273	Fire Prevention Plan (Needs updated review)
SP-O&M-MJV-267	CAT Steer Loader Safety Inspection
PP-O&M-MJV-061	Mojave Risk Assessment
SP-O&M-MJV-268	Emergency Drill Guideline-Fire at Plant Equipment
SP-O&M-MJV-276	Mojave Incident Report Training



SAFETY DATA SHEET

This safety data sheet was created pursuant to the requirements of: US OSHA Hazard Communication Standard (29 CFR 1910.1200)

Revision date 31-Aug-2023

Revision Number 13

1. Identification

Product identifier

Product name

CHEMGUARD NFF-331 3x3

Other means of identification

Product code

A16381HLDY

Synonyms

None

Recommended use of the chemical and restrictions on use

Recommended use

No information available

Uses advised against

No information available

Details of the supplier of the safety data sheet

Company Name

Tyco Fire Protection Products

One Stanton Street Marinette, WI 54143-2542 Telephone: 715-735-7411

E-mail

psra@jci.com

Company Phone Number

Product Stewardship at +1-715-735-7411

Emergency telephone

CHEMTREC 001-800-424-9300 or 001-703-527-3887

2. Hazard(s) identification

Classification

This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Serious eye damage/eye irritation

Category 2A

Label elements Signal word Warning

Hazard Statements

Causes serious eye irritation





Precautionary Statements - Prevention

Wear protective gloves/clothing and eye/face protection

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing Immediately call a POISON CENTER or doctor/physician

Hazards not otherwise classified (HNOC)

Not applicable

Other information

No information available.

3. Composition/information on ingredients

Substance

Not applicable.

Mixture

This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Chemical name	CAS No	Weight-%	Trade secret
2-(2-Butoxyethoxy)ethanol	112-34-5	3-7	•
1-Propanaminium, N-(3-Aminopropyl)-2-hydroxy-N,N-dimethyl-3-sulfo-, N-Coco-acylderivates	68139-30-0	1 - 5	
Fatty Alcohol Sulfate, TEA-salt	139-96-8	1 - 5	•
Sodium Octyl Sulfate	142-31-4	1 - 5	•

^{*}The exact percentage (concentration) of composition has been withheld as a trade secret.

4. First-aid measures

Description of first aid measures

Inhalation

Remove to fresh air.

Eye contact

Rinse thoroughly with plenty of water for at least 15 minutes, lifting lower and upper eyelids.

Consult a physician.

Skin contact

Wash skin with soap and water.

Ingestion

Rinse mouth.

Most important symptoms and effects, both acute and delayed

Symptoms

No information available.

Effects of Exposure

No information available.



Indication of any immediate medical attention and special treatment needed

Note to physicians Treat symptomatically.

5. Fire-fighting measures

surrounding environment.

Large Fire CAUTION: Use of water spray when fighting fire may be inefficient.

Unsuitable extinguishing media Do not scatter spilled material with high pressure water streams.

Specific hazards arising from the

chemical

No information available.

Explosion data

Sensitivity to mechanical impact None.

Sensitivity to static discharge None.

Special protective equipment and precautions for fire-fighters

Firefighters should wear self-contained breathing apparatus and full firefighting turnout gear.

Use personal protection equipment.

Accidental release measures

Personal precautions, protective equipment and emergency procedures

Personal precautions Ensure adequate ventilation.

For emergency responders Use pers

Use personal protection recommended in Section 8.

Environmental Precautions

Environmental Precautions

Prevent entry into waterways, sewers, basements or confined areas. Do not flush into surface water or sanitary sewer system. Prevent further leakage or spillage if safe to do so. Prevent product from entering drains. See Section 12 for additional Ecological Information.

Methods and material for containment and cleaning up

Methods for containment Prevent further leakage or spillage if safe to do so.

Methods for cleaning up Pick up and transfer to properly labeled containers.

7. Handling and storage

Precautions for safe handling

Advice on safe handling Handle in accordance with good industrial hygiene and safety practice.

Conditions for safe storage, including any incompatibilities

Storage Conditions Keep container tightly closed in a dry and well-ventilated place.



8. Exposure controls/personal protection

Control parameters

Chemical name	ACGIH TLV	OSHA PEL	NIOSH
	TWA: 10 ppm inhalable fraction	-	-
112-34-5	and vapor		

Appropriate engineering controls

Engineering controls

Showers

Eyewash stations Ventilation systems.

Individual protection measures, such as personal protective equipment

Eye/face protection

No special protective equipment required.

Skin and body protection

No special protective equipment required.

Respiratory protection

No protective equipment is needed under normal use conditions. If exposure limits are

None known

exceeded or irritation is experienced, ventilation and evacuation may be required.

General hygiene considerations

Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Information on basic physical and chemical properties

Physical state

Liquid

Appearance No information available

Color

light yellow

Odor

Characteristic

Odor threshold

Partition coefficient

No information available

Property	Values	Remarks • Method
pH	7	None known
pH (as aqueous solution)		None known
Melting point / freezing point	-9 °C / 16 °F	None known
Initial boiling point and boiling rang	eNo data available	None known
Flash point	No data available	None known
Evaporation rate	No data available	None known
Flammability	No data available	None known
Flammability Limit in Air		None known
Upper flammability or explosive limits	No data available	
Lower flammability or explosive limits	No data available	
Vapor pressure	No data available	None known
Relative vapor density	No data available	None known
Relative density	No data available	None known
Water solubility	No data available	None known
Solubility(ies)	No data available	None known

No data available





A16381HLDY - CHEMGUARD NFF-331 3x3

Autoignition temperature

No data available

None known

Decomposition temperature Kinematic viscosity

No data available

None known None known

Dynamic viscosity

No data available

None known

Other information

Explosive properties

Oxidizing properties

No information available

Liquid Density 1.12 g/ml

Bulk density No information available

10. Stability and reactivity

Reactivity

No information available.

Chemical stability

Stable under normal conditions.

Possibility of hazardous reactions

None under normal processing.

Conditions to avoid

Extremes of temperature and direct sunlight.

Incompatible materials

Strong oxidizing agents. Strong acids. Strong bases.

Hazardous decomposition products None known based on information supplied.

11. Toxicological information

Information on likely routes of exposure

Inhalation

Specific test data for the substance or mixture is not available.

Eye contact

Causes serious eye irritation.

Skin contact

Specific test data for the substance or mixture is not available.

Ingestion

Specific test data for the substance or mixture is not available.

Symptoms related to the physical, chemical and toxicological characteristics

Symptoms

No information available.

Acute toxicity

Product information

Method	species	Exposure Route	Effective dose	Exposure time	Results
U.S. EPA Health Effects Test Guidelines, OPPTS 870.1100, Acute Oral Toxicity		oral	5000 mg/kg		LD50 > 5000 mg/kg
U.S. EPA Health Effects Test Guidelines, OPPTS 870.1200, Acute Dermal Toxicity		dermal		24 hours	LD50 > 5050 mg/kg
U.S. EPA Health Effects Test Guidelines, OPPTS 870.2500 , Dermal Irritation	Rabbit	dermal		4 hours	non irritating

Numerical measures of toxicity

No information available

Chemical name	Oral LD50	Dermal LD50	Inhalation LC50
2-(2-Butoxyethoxy)ethanol 112-34-5	= 5660 mg/kg (Rat)	= 2700 mg/kg (Rabbit)	•
Sodium Octyl Sulfate 142-31-4	= 3200 mg/kg (Rat)	> 2000 mg/kg (Rat)	•

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Skin corrosion/irritation

No information available.

Serious eye damage/eye irritation Causes serious eye irritation.

Method	species	Exposure Route	Effective dose	Exposure time	Results	
U.S. EPA Health Effects Test Guidelines, OPPTS 870.2400 Ocular Irritation	Control of the Contro	eye			Irritant	

Respiratory or skin sensitization

No information available.

Germ cell mutagenicity

No information available.

Carcinogenicity

No information available.

Reproductive toxicity

No information available.

STOT - single exposure

No information available.

STOT - repeated exposure

No information available.

Aspiration hazard

No information available.

Other adverse effects

No information available.


Interactive effects

No information available.

12. Ecological information

Ecotoxicity

Method	Species	Endpoint type	Effective dose	Exposure time	Results
OECD Test No. 203: Fish, Acute Toxicity Test	Oncorhynchus mykiss (rainbow trout)	NOEC	>100 mg/L	96 hours	NOEC: 50 mg/l
OECD Test No. 203: Fish, Acute Toxicity Test	Marine Species-Silverside Minnow, Menidia Beryllina	NOEC	37.5 mg/L	96 hours	NOEC: 25 mg/l





A16381HLDY - CHEMGUARD NFF-331 3x3

OECD Test No. 202: Daphnia sp., Acute Immobilization Test	Daphnia magna	NOEC	EC50 66.667 mg/L	48 hours	NOEC: 50 mg/l
U.S.EPA Health Effects Test Guidelines, OCSPP 850.1035: Static 96-hour Acute Toxicity Test	Mysidopsis bahia	NOEC	EC50 62.5 mg/L	96 hours	NOEC: 161.71 mg/l
OECD Test No. 201: Freshwater Alga and Cyanobacteria, Growth Inhibition Test	Pseudokirchneriella subcapitata	IC50	IC50: > 100 mg/L	72 hours	NOEC: 100 mg/l
OECD Test No. 209: Activated Sludge, Respiration Inhibition Test (Carbon and Ammonium Oxidation)	microorganisms	IC50		3 hours	IC50 > 1000 mg/l

Chemical name	Algae/aquatic plants	Fish	Toxicity to microorganisms	Crustacea
2-(2-Butoxyethoxy)ethan ol 112-34-5	EC50 (96h) > 100 mg/L Desmodesmus subspicatus	LC50 (96h) static = 1300 mg/L Lepomis macrochirus	-	EC50 (48h) > 100 mg/L Daphnia magna

Method	Exposure time	VALUE	Results
OECD Test No. 301F: Ready Biodegradability: Manometric Respirometry Test (TG 301 F)	28 days		Readily biodegradable

Persistence and degradability

Biodegradability (B.O.D./C.O.D.)

BOD/COD analysis Concentrate:

BOD5: 356400 mg/L BOD10: 406200 mg/L

BOD15: 426000 mg/L

BOD20: 442200 mg/L

BOD28: 470400 mg/L

COD: 589917 mg/L

Diluted (97% water, 3% Concentrate)

BOD5: 12240 mg/L BOD10: 12940 mg/L

BOD15: 14000 mg/L

BOD20: 14200 mg/L

BOD28: 15620 mg/L

COD: 18033 mg/L

Bioaccumulation

There is no data for this product.

Chemical name	Partition coefficient
2-(2-Butoxyethoxy)ethanol 112-34-5	1



Mobility

Keep out of waterways.

Other adverse effects

No information available.

13. Disposal considerations

Disposal methods

Waste from residues/unused

products

Dispose of in accordance with local regulations. Dispose of waste in accordance with

environmental legislation.

Contaminated packaging

Do not reuse empty containers.

14. Transport information

DOT

Not regulated

TDG

Not regulated

MEX

Not regulated

ICAO (air)

Not regulated

IATA

Not regulated

IMDG

Not regulated

15. Regulatory information

International Inventories

TSCA DSL/NDSL Complies Complies

EINECS/ELINCS ENCS Does not comply Does not comply Does not comply

KECL PICCS

IECSC

Does not comply Does not comply

AIIC NZIoC Complies Complies

Legend:

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory

DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List

EINECS/ELINCS - European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances

ENCS - Japan Existing and New Chemical Substances

IECSC - China Inventory of Existing Chemical Substances

KECL - Korean Existing and Evaluated Chemical Substances

PICCS - Philippines Inventory of Chemicals and Chemical Substances

AIIC - Australian Inventory of Industrial Chemicals

NZIoC - New Zealand Inventory of Chemicals



US Federal Regulations

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product contains a chemical or chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372.

Chemical name	SARA 313 - Threshold Values %
2-(2-Butoxyethoxy)ethanol - 112-34-5	1.0

SARA 311/312 Hazard Categories

Should this product meet EPCRA 311/312 Tier reporting criteria at 40 CFR 370, refer to Section 2 of this SDS for appropriate classifications.

CWA (Clean Water Act)

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42).

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355). There may be specific reporting requirements at the local, regional, or state level pertaining to releases of this material.

US State Regulations

California Proposition 65


This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

Chemical name	New Jersey	Massachusetts	Pennsylvania
Water 7732-18-5			X
2-(2-Butoxyethoxy)ethanol 112-34-5	×		х
Fermentation derived cellulose 9004-34-6	×	X	х
1,2-Propanediol 57-55-6	x		х
Glycerol 56-81-5	X	х	X
1-Decanol 112-30-1			X
Benzoic acid 65-85-0	×	x	х
Sodium Hydroxide 1310-73-2	x	х	х
sodium dodecylbenzene sulfonate 25155-30-0	X	x	X

U.S. EPA Label Information

EPA Pesticide Registration Number Not applicable





16. Other information

NFPA HMIS

Health hazards 2

Flammability 0

Instability 0

Special hazards -

Health hazards 2

Flammability 0

Physical hazards 0

Personal protection X

Key or legend to abbreviations and acronyms used in the safety data sheet

TWA Ceiling

Legend Section 8: Exposure controls/personal protection TWA (time-weighted average)

STEL

STEL (Short Term Exposure Limit)

Skin designation

Key literature references and sources for data used to compile the SDS

Agency for Toxic Substances and Disease Registry (ATSDR) U.S. Environmental Protection Agency ChemView Database

Maximum limit value

European Food Safety Authority (EFSA) EPA (Environmental Protection Agency) Acute Exposure Guideline Level(s) (AEGL(s))

U.S. Environmental Protection Agency Federal Insecticide, Fungicide, and Rodenticide Act

U.S. Environmental Protection Agency High Production Volume Chemicals

Food Research Journal

Hazardous Substance Database

International Uniform Chemical Information Database (IUCLID)

National Institute of Technology and Evaluation (NITE)

Australia National Industrial Chemicals Notification and Assessment Scheme (NICNAS)

NIOSH (National Institute for Occupational Safety and Health)

National Library of Medicine's ChemID Plus (NLM CIP)

National Library of Medicine's PubMed database (NLM PUBMED)

National Toxicology Program (NTP)

New Zealand's Chemical Classification and Information Database (CCID)

Organization for Economic Co-operation and Development Environment, Health, and Safety Publications

Organization for Economic Co-operation and Development High Production Volume Chemicals Program

Organization for Economic Co-operation and Development Screening Information Data Set

World Health Organization

Revision date

31-Aug-2023

Revision Note Disclaimer

No information available.

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet



SAFETY DATA SHEET

1. Identification

Product identifier BL1260
Other means of identification None.

Recommended use Boiler Water Treatment

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name ChemTreat, Inc.

Address 5640 Cox Road
Glen Allen, VA 23060

United States

Telephone 800-648-4579
Website chemtreat.com

E-mail productcompliance@chemtreat.com

Emergency phone number 800-424-9300

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Skin corrosion/irritation Category 2

Sensitization, skin Category 1

Environmental hazards Not classified.

OSHA defined hazards Not classified.

Label elements



Signal word Warning

Hazard statement Causes skin irritation. May cause an allergic skin reaction.

Precautionary statement

Prevention Avoid breathing mist/vapors. Wash thoroughly after handling. Contaminated work clothing must

not be allowed out of the workplace. Wear protective gloves.

Response If on skin: Wash with plenty of water. If skin irritation or rash occurs: Get medical advice/attention.

Take off contaminated clothing and wash it before reuse.

Storage Not available.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise

classified (HNOC)

None known.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Carbohydrazide		497-18-7	10 - < 20
Other components below i	reportable levels		80 - < 90

4. First-aid measures

Inhalation Move to fresh air. Call a physician if symptoms develop or persist.

Material name: BL1260 SDS US

Remove contaminated clothing immediately and wash skin with soap and water. In case of Skin contact

eczema or other skin disorders: Seek medical attention and take along these instructions. Wash

contaminated clothing before reuse.

Eye contact

Rinse with water. Get medical attention if irritation develops and persists.

Ingestion

Rinse mouth. Get medical attention if symptoms occur.

Most important

symptoms/effects, acute and

delayed

Skin irritation. May cause redness and pain. May cause an allergic skin reaction. Dermatitis. Rash.

Indication of immediate medical attention and special

treatment needed

Provide general supportive measures and treat symptomatically. Keep victim under observation.

Symptoms may be delayed.

General information Ensure that medical personnel are aware of the material(s) involved, and take precautions to

protect themselves. Wash contaminated clothing before reuse.

Water fog. Foam. Dry chemical powder. Carbon dioxide (CO2).

5. Fire-fighting measures

Suitable extinguishing media

Unsuitable extinguishing media

Specific hazards arising from

the chemical

Special protective equipment and precautions for firefighters

Fire fighting

equipment/instructions

Specific methods General fire hazards Do not use water jet as an extinguisher, as this will spread the fire.

During fire, gases hazardous to health may be formed.

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Move containers from fire area if you can do so without risk.

Use standard firefighting procedures and consider the hazards of other involved materials.

No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist/vapors. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Avoid breathing mist/vapors. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities Store in tightly closed container. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

US. OSHA Table Z-1 Permissible Exposure Limits (PEL) for Air Contaminants (29 CFR 1910.1000) Components **Type** Value

Hydrazine (CAS 302-01-2) **PEL** 1.3 mg/m3 1 ppm

Material name: BL1260 SDS US

US. ACGIH Threshold Limit Values (TLV)

Components	Type	Value	
Hydrazine (CAS 302-01-2)	TWA	0.01 ppm	
NIOSH. Immediately Dangerous to	o Life or Health (IDLH) Values,	as amended	
Components	Туре	Value	
Hydrazine (CAS 302-01-2)	IDLH	2.9 %	
		50 ppm	
US. NIOSH: Pocket Guide to Cher	nical Hazards Recommended	Exposure Limits (REL)	
Components	Туре	Value	
Hydrazine (CAS 302-01-2)	Ceiling	0.04 mg/m3	
		0.03 ppm	

Biological limit values

No biological exposure limits noted for the ingredient(s).

Exposure guidelines

US - California OELs: Skin designation

Hydrazine (CAS 302-01-2) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Hydrazine (CAS 302-01-2) Skin designation applies.

US - Tennessee OELs: Skin designation

Hydrazine (CAS 302-01-2)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Hydrazine (CAS 302-01-2) Danger of cutaneous absorption

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Hydrazine (CAS 302-01-2)

Can be absorbed through the skin.

Appropriate engineering

controls

Good general ventilation should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Provide eyewash station and safety shower.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles). Face shield is recommended.

Skin protection

Hand protection Wear appropriate chemical resistant gloves.

Other Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.

Respiratory protection In case of insufficient ventilation, wear suitable respiratory equipment.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Contaminated work clothing should not be allowed out of the

workplace.

9. Physical and chemical properties

Appearance Clear
Physical state Liquid.
Form Liquid.

Colorless to Light Straw

Odor Odorless
Odor threshold Not available.

pH 6 - 9 @ 20C (100% Dilution)

Melting point/freezing point 41.00 °F (5.00 °C) Initial boiling point and boiling Not available.

range

Flash point Not available.

Evaporation rate Not available.

Material name: BL1260 SDS US

Flammability (solid, gas) Not applicable.

Upper/lower flammability or explosive limits

Explosive limit - lower (%) Not available.

Explosive limit - upper (%) Not available.

Vapor pressure
Not available.
Vapor density
Not available.
Relative density
Not available.

Solubility(ies)

Solubility (water) Not available.

Partition coefficient Not available.

(n-octanol/water)

Auto-ignition temperatureNot available.Decomposition temperatureNot available.ViscosityNot available.

Other information

Explosive properties Not explosive. **Oxidizing properties** Not oxidizing.

Pounds per gallon 8.56

Specific gravity 1.02 - 1.03 @ 20C

10. Stability and reactivity

Reactivity The product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous

reactions

No dangerous reaction known under conditions of normal use.

Conditions to avoid Contact with incompatible materials.

Incompatible materials Strong oxidizing agents.

Hazardous decomposition

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation Prolonged inhalation may be harmful.

Skin contact Causes skin irritation. May cause an allergic skin reaction.

Eye contact Direct contact with eyes may cause temporary irritation.

Ingestion Expected to be a low ingestion hazard.

Symptoms related to the physical, chemical and toxicological characteristics

Skin irritation. May cause redness and pain. May cause an allergic skin reaction. Dermatitis.

Rash.

Information on toxicological effects

Acute toxicity Not known.

Components Species Test Results

Carbohydrazide (CAS 497-18-7)

Acute Oral

LD50 Rat 311 mg/kg

Hydrazine (CAS 302-01-2)

Acute

Dermal

LD50 Rabbit 91 mg/kg

Oral LD50

Rat 60 mg/kg

Material name: BL1260 SDS US

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye

irritation

Direct contact with eyes may cause temporary irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization May cause an allergic skin reaction.

Germ cell mutagenicityNo data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Not classifiable as to carcinogenicity to humans.

IARC Monographs. Overall Evaluation of Carcinogenicity

Hydrazine (CAS 302-01-2) 2A Probably carcinogenic to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

US. National Toxicology Program (NTP) Report on Carcinogens

Hydrazine (CAS 302-01-2) Reasonably Anticipated to be a Human Carcinogen.

Reproductive toxicity

This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the

possibility that large or frequent spills can have a harmful or damaging effect on the environment.

Product Species Test Results

BL1260

Aquatic

Crustacea LC50 Ceriodaphnia dubia 158.38 mg/l, 48 hours
Fish LC50 Fathead minnow (Pimephales promelas) 159.32 mg/l, 96 hours

Persistence and degradability

No data is available on the degradability of any ingredients in the mixture.

Bioaccumulative potential No data available.

Mobility in soil No data available.

Other adverse effects

No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation

potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructionsCollect and reclaim or dispose in sealed containers at licensed waste disposal site. Dispose of

contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is

emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal.

14. Transport information

DOT

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

Material name: BL1260 SDS US

IMDG

Not regulated as dangerous goods.

Transport in bulk according to

Not established.

Annex II of MARPOL 73/78 and

the IBC Code

15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

Toxic Substances Control Act (TSCA)

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Hydrazine (CAS 302-01-2)

Listed.

SARA 304 Emergency release notification

Hydrazine (CAS 302-01-2)

1 LBS

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Chemical name	CAS number	Reportable quantity (pounds)	Threshold planning quantity (pounds)	Threshold planning quantity, lower value (pounds)	Threshold planning quantity, upper value (pounds)
				(pourius)	(pourius)

1000 Hydrazine 302-01-2 1 Yes

SARA 311/312 Hazardous

chemical

Skin corrosion or irritation Classified hazard Respiratory or skin sensitization categories

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
Hydrazine	302-01-2	< 0.1

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Hydrazine (CAS 302-01-2)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Hydrazine (CAS 302-01-2)

Safe Drinking Water Act

Contains component(s) regulated under the Safe Drinking Water Act.

(SDWA)

US state regulations

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd.

(a))

Hydrazine (CAS 302-01-2)

California Proposition 65



WARNING: This product can expose you to Hydrazine, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

California Proposition 65 - CRT: Listed date/Carcinogenic substance

Hydrazine (CAS 302-01-2) Listed: January 1, 1988

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Industrial Chemicals (AICIS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No

Material name: BL1260 SDS US Country(s) or region Inventory name On inventory (yes/no)* China Inventory of Existing Chemical Substances in China (IECSC) Europe Yes

European Inventory of Existing Commercial Chemical

Substances (EINECS)

Europe European List of Notified Chemical Substances (ELINCS) No Inventory of Existing and New Chemical Substances (ENCS) Japan Yes Korea Existing Chemicals List (ECL) Yes New Zealand **New Zealand Inventory** Yes **Philippines** Yes

Philippine Inventory of Chemicals and Chemical Substances

(PICCS)

Yes Taiwan Taiwan Chemical Substance Inventory (TCSI) United States & Puerto Rico Toxic Substances Control Act (TSCA) Inventory Yes

16. Other information, including date of preparation or last revision

07-29-2022 Issue date 11-02-2023 **Revision date**

Version # 03

Health: 2 **HMIS®** ratings

Flammability: 0 Physical hazard: 0 Personal protection: D

Disclaimer

ChemTreat, Inc. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available. Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, ChemTreat, Inc. makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will ChemTreat, Inc. be responsible for damages of any nature whatsoever resulting from the use or reliance upon information. No representation or warranties, either expressed or implied, of merchantability, fitness for a particular purpose, or of any other nature are made hereunder with respect to information or the product to which information refers.

Revision information

Composition / Information on Ingredients: Disclosure Overrides

Other information

Prepared by: Product Compliance Department; ProductCompliance@chemtreat.com

Material name: BL1260 SDS US

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s) A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).



SAFETY DATA SHEET



1. Identification

Product identifier BL1794 Other means of identification None.

Recommended use Boiler Water Treatment / Tratamento de água de caldeira / Tratamiento de agua de caldera /

Traitement de l'eau de chaudière

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

ChemTreat, Inc. Company name 5640 Cox Road **Address** Glen Allen, VA 23060

United States

Telephone 800-648-4579 Website chemtreat.com

E-mail productcompliance@chemtreat.com

800-424-9300 **Emergency phone number**

2. Hazard(s) identification

Not classified. Physical hazards

Health hazards Skin corrosion/irritation Category 2 Serious eye damage/eye irritation Category 2

Environmental hazards Not classified. Not classified. **OSHA** defined hazards

Label elements



Signal word Warning

Hazard statement Causes skin irritation. Causes serious eye irritation.

Precautionary statement

Prevention Wash thoroughly after handling. Wear eye protection/face protection. Wear protective gloves.

Response If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and

easy to do. Continue rinsing. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash it before reuse.

Storage Not available. Not available. **Disposal**

Hazard(s) not otherwise classified (HNOC)

None known.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Trisodium phosphate		7601-54-9	3 - < 5
Other components below re	portable levels		90 - 100

4. First-aid measures

Move to fresh air. Call a physician if symptoms develop or persist. Inhalation

Material name: BL1794 SDS US 699

Skin contact Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get

medical advice/attention. Wash contaminated clothing before reuse.

Eye contact Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if

vision. Skin irritation. May cause redness and pain.

present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists.

Ingestion Rinse mouth. Get medical attention if symptoms occur.

Most important symptoms/effects, acute and

symptoms/effects, acute and delayed

Indication of immediate

Provide general supportive measures and treat symptomatically. Keep victim under observation.

Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred

medical attention and special treatment needed

Symptoms may be delayed.

Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.

5. Fire-fighting measures

Suitable extinguishing media

Unsuitable extinguishing media

General information

Water fog. Foam. Dry chemical powder. Carbon dioxide (CO2). Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical

During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

and precautions for firefighte Fire fighting

equipment/instructions

Move containers from fire area if you can do so without risk.

Specific methods
General fire hazards

Use standard firefighting procedures and consider the hazards of other involved materials.

No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store in tightly closed container. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

US. OARS. Workplace Environmental Exposure Level (WEEL) Guide

ComponentsTypeValueTrisodium phosphate (CAS 7601-54-9)STEL5 mg/m3

Biological limit values

No biological exposure limits noted for the ingredient(s).

Material name: BL1794 SDS US

Appropriate engineering

controls

Good general ventilation should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Provide eyewash station and safety shower

Individual protection measures, such as personal protective equipment

Wear safety glasses with side shields (or goggles). Eye/face protection

Skin protection

Hand protection Wear appropriate chemical resistant gloves. Other Wear appropriate chemical resistant clothing.

Respiratory protection In case of insufficient ventilation, wear suitable respiratory equipment.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective

equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid.

Form Liquid. Liquid Color Not available. Odor Odorless Not available. **Odor threshold** ≥ 11 - ≤ 14 100 37.40 °F (3.00 °C) = Melting point/freezing point

Initial boiling point and boiling

range

Not available.

Not available.

Flash point Not available. **Evaporation rate** Not available. Flammability (solid, gas) Not applicable. Upper/lower flammability or explosive limits

Explosive limit - lower (%) Not available. Explosive limit - upper (%) Not available. Vapor pressure Not available. Vapor density Not available.

Relative density Solubility(ies)

Not available. Solubility (water) Not available. Partition coefficient

(n-octanol/water)

Auto-ignition temperature Not available. **Decomposition temperature** Not available. **Viscosity** > 0 - < 200 cps

Other information

Not explosive. **Explosive properties** Oxidizing properties Not oxidizing.

8.67 Pounds per gallon

Specific gravity ≥ 1.03 - ≤ 1.05 @ 20C

VOC 0 %w/w

10. Stability and reactivity

Reactivity The product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions.

Material name: BL1794 SDS US 701

396 Version #: 01 Issue date: 10-05-2023

Possibility of hazardous

reactions

No dangerous reaction known under conditions of normal use.

Conditions to avoid

Contact with incompatible materials.

Incompatible materials

Strong oxidizing agents.

Hazardous decomposition

No hazardous decomposition products are known.

products

11. Toxicological information

Information on likely routes of exposure

Prolonged inhalation may be harmful. Inhalation

Causes skin irritation. Skin contact

Causes serious eye irritation. Eye contact

Ingestion Expected to be a low ingestion hazard.

Symptoms related to the physical, chemical and toxicological characteristics Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred

vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity

Test Results Components **Species**

Trisodium phosphate (CAS 7601-54-9)

Acute

Dermal

LD50 Rabbit >= 2 mg/kg

Inhalation

LC50 Rat >= 2.1600000000000001 mg/l, 1 Hours

Oral

LD50 Rat 4.799999999999998 mg/kg

Causes skin irritation. Skin corrosion/irritation

Serious eye damage/eye

irritation

Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

No data available to indicate product or any components present at greater than 0.1% are Germ cell mutagenicity

mutagenic or genotoxic.

Carcinogenicity Not classifiable as to carcinogenicity to humans.

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

This product is not expected to cause reproductive or developmental effects. Reproductive toxicity

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

Material name: BL1794 SDS US 4/7 396 Version #: 01 Issue date: 10-05-2023

No data is available on the degradability of any ingredients in the mixture. Persistence and degradability

Bioaccumulative potential No data available. Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation

potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Dispose of this material and its container to hazardous or special waste collection point. Incinerate **Disposal instructions**

the material under controlled conditions in an approved incinerator. Dispose of contents/container

in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

D002: Waste Corrosive material [pH ≤2 or =>12.5, or corrosive to steel] Hazardous waste code

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Since emptied containers may retain product residue, follow label warnings even after container is Contaminated packaging

emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal.

14. Transport information

DOT

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

Transport in bulk according to Annex II of MARPOL 73/78 and

the IBC Code

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

Toxic Substances Control Act (TSCA)

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not established.

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Trisodium phosphate (CAS 7601-54-9) Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous

Yes

chemical

Classified hazard

Skin corrosion or irritation Serious eye damage or eye irritation

categories

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Material name: BL1794 SDS US

396 Version #: 01 Issue date: 10-05-2023

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act

Not regulated.

Inventory name

(SDWA)

US state regulations

California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.

International Inventories

Country(s) or region

Australia	Australian Inventory of Industrial Chemicals (AICIS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
Taiwan	Taiwan Chemical Substance Inventory (TCSI)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

Compliance Information: Halal

Compliance Information: Kosher

This product is certified by the Orthodox Unionas Kosher pareve

Ashland, VA Eldridge, IA Nederland, TX



Compliance Information: Food Regulations

21 CFR 173.310

16. Other information, including date of preparation or last revision

Issue date 10-05-2023

Version # 01

HMIS® ratings Health: 1

Flammability: 0 Physical hazard: 0 Personal protection: X

Material name: BL1794 SDS US

396 Version #: 01 Issue date: 10-05-2023

On inventory (yes/no)*

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

Disclaimer

ChemTreat, Inc. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available. Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, ChemTreat, Inc. makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will ChemTreat, Inc. be responsible for damages of any nature whatsoever resulting from the use or reliance upon information. No representation or warranties, either expressed or implied, of merchantability, fitness for a particular purpose, or of any other nature are made hereunder with respect to information or the product to which information refers.

Other information

Prepared by: Product Compliance Department; ProductCompliance@chemtreat.com

ChemTreat

SAFETY DATA SHEET

1. Identification

Product identifier BL8411

Other means of identification

Product code BL8411

Recommended use Boiler Water Treatment

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Telephone

Company nameChemTreatAddress5640 Cox Road

Glen Allen, VA 23060

United States 800-648-4579 Not available.

E-mail Not available. Emergency phone number 800-424-9300

2. Hazard(s) identification

Physical hazardsFlammable liquidsCategory 3Health hazardsAcute toxicity, oralCategory 4

Skin corrosion/irritation

Serious eye damage/eye irritation

Sensitization, respiratory

Category 1

Reproductive toxicity

Specific target organ toxicity, repeated

Category 2

Category 2

No source

exposure

Category 2

Environmental hazards Hazardous to the aquatic environment, acute

hazard

Hazardous to the aquatic environment,

long-term hazard

Category 2

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Flammable liquid and vapor. Harmful if swallowed. Causes severe skin burns and eye damage.

Causes serious eye damage. Suspected of damaging fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure. Toxic to aquatic life. Harmful to

aquatic life with long lasting effects.

Precautionary statement

Prevention Obtain special instructions before use. Do not handle until all safety precautions have been read

and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Do not breathe mist/vapors. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Avoid release to the environment. Wear

protective gloves/protective clothing/eye protection/face protection.

Material name: BL8411 sps us

BL8411 Version #: 04 Revision date: 05-12-2022 Issue date: 07-23-2021

Response

Rinse mouth. If swallowed: Rinse mouth. Do NOT induce vomiting. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a poison center/doctor. Wash contaminated clothing before reuse. In case of fire: Use appropriate media to extinguish.

Storage

Store in a well-ventilated place. Keep cool. Store locked up.

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise classified (HNOC)

None known.

Supplemental information

None.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
cyclohexanamine		108-91-8	20 - < 30
Ethanolamine		141-43-5	10 - < 20
Amines, tallow alkyl, ethoxylated		61791-26-2	1 - < 3
N'-[(Z)-octadec-9-enyl]propane-1,3-diamine		7173-62-8	1 - < 3
Other components below reportable le	evels		60 - < 70

4. First-aid measures

Inhalation

Move to fresh air. Call a physician if symptoms develop or persist.

Skin contact

Take off immediately all contaminated clothing. Rinse skin with water/shower. Call a physician or poison control center immediately. Chemical burns must be treated by a physician. Wash contaminated clothing before reuse.

Eye contact

Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a physician or poison control center immediately.

Ingestion

Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If

vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Most important symptoms/effects, acute and

delayed

media

Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result. Prolonged exposure may cause chronic effects.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Chemical burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

General information

Take off all contaminated clothing immediately. IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media Unsuitable extinguishing

Water fog. Alcohol resistant foam. Dry chemical powder. Carbon dioxide (CO2).

Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical

Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire fighting equipment/instructions In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk.

Specific methods General fire hazards Use standard firefighting procedures and consider the hazards of other involved materials.

Flammable liquid and vapor.

Material name: BL8411 SDS US BL8411 Version #: 04 Revision date: 05-12-2022 Issue date: 07-23-282

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist/vapors. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Use water spray to reduce vapors or divert vapor cloud drift. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Take precautionary measures against static discharge. Use only non-sparking tools. Prevent product from entering drains.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid release to the environment. Inform appropriate managerial or supervisory personnel of all environmental releases. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Do not breathe mist/vapors. Do not get in eyes, on skin, or on clothing. Do not taste or swallow. Avoid prolonged exposure. When using, do not eat, drink or smoke. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in tightly closed container. Store in a well-ventilated place. Keep in an area equipped with sprinklers. Store away from incompatible materials (see Section 10 of the SDS).

Value

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	туре	value	
Ethanolamine (CAS 141-43-5)	PEL	6 mg/m3	
		3 ppm	
US. ACGIH Threshold Limit Valu	es		
Components	Туре	Value	
cyclohexanamine (CAS 108-91-8)	TWA	10 ppm	
Ethanolamine (CAS 141-43-5)	STEL	6 ppm	
	TWA	3 ppm	
US. NIOSH: Pocket Guide to Che	mical Hazards		
Components	Туре	Value	
cyclohexanamine (CAS 108-91-8)	TWA	40 mg/m3	

Material name: BL8411 SDS US

BL8411 Version #: 04 Revision date: 05-12-2022 Issue date: 07-23-202

Value Components Type 10 ppm Ethanolamine (CAS **STEL** 15 mg/m3 141-43-5) 6 ppm **TWA** 8 mg/m3 3 ppm

Biological limit values No biological exposure limits noted for the ingredient(s).

Exposure guidelines

US - California OELs: Skin designation

cyclohexanamine (CAS 108-91-8) Can be absorbed through the skin.

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Good general ventilation should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Avoid contact with eyes. Wear safety glasses with side shields (or goggles) and a face shield. Eye/face protection

Wear a full-face respirator, if needed.

Skin protection

Hand protection Wear appropriate chemical resistant gloves.

Other Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.

Respiratory protection Chemical respirator with organic vapor cartridge and full facepiece.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Observe any medical surveillance requirements. When using do not smoke. Keep away from food and drink. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective

equipment to remove contaminants.

9. Physical and chemical properties

Clear **Appearance** Physical state Liquid. **Form** Liquid. Color Colorless. Odor Moderate **Odor threshold** Not available. 12 - 14 @ 20C pН

> 40.10 °F (> 4.50 °C) Melting point/freezing point 206 °F (96.67 °C) Initial boiling point and boiling

range

112.0 °F (44.4 °C) Flash point **Evaporation rate** Not available. Flammability (solid, gas) Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower

(%)

Not available.

Flammability limit - upper

Not available.

Explosive limit - lower (%) Not available. Not available. Explosive limit - upper (%)

2.94 hPa estimated Vapor pressure

Material name: BL8411

Vapor density Not available.

Relative density Not available.

Solubility(ies)

Solubility (water) Not available.

Partition coefficient Not available.

(n-octanol/water)

Auto-ignition temperature 559.4 °F (293 °C) estimated

Decomposition temperature Not available. **Viscosity** 0 - 200 cps

Other information

Density8.22 lbs/galExplosive propertiesNot explosive.Oxidizing propertiesNot oxidizing.

Pounds per gallon 8.22

Specific gravity 0.98 - 0.99 @ 20C

10. Stability and reactivity

Reactivity Reacts violently with strong acids. This product may react with oxidizing agents.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous Hazardous polymerization does not occur.

reactions

Conditions to avoid Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the

flash point. Contact with incompatible materials. Do not mix with other chemicals.

Incompatible materials Strong acids. Strong oxidizing agents. Oxidizing agents. Aluminum.

Hazardous decomposition

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May cause irritation to the respiratory system. Prolonged inhalation may be harmful.

Skin contact Causes severe skin burns.

Prolonged or repeated exposure may cause liver and kidney damage. These effects have not

been observed in humans.

Eye contact Causes serious eye damage.

Ingestion Causes digestive tract burns. Harmful if swallowed.

Symptoms related to the physical, chemical and toxicological characteristics

Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including

blindness could result.

Information on toxicological effects

Acute toxicity Harmful if swallowed.

Components Species Test Results

Ethanolamine (CAS 141-43-5)

<u>Acute</u> Dermal

LD50 Rabbit 1025 mg/kg

Skin corrosion/irritation Causes severe skin burns and eye damage.

Serious eye damage/eye

irritation

Causes serious eye damage.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Material name: BL8411 sps us

BL8411 Version #: 04 Revision date: 05-12-2022 Issue date: 07-23-2020

Germ cell mutagenicityNo data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Not classifiable as to carcinogenicity to humans.

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

Reproductive toxicity Suspected of damaging fertility or the unborn child.

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

May cause damage to organs through prolonged or repeated exposure.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful. May cause damage to organs through prolonged or

repeated exposure. May be harmful if absorbed through skin.

Prolonged or repeated exposure may cause liver and kidney damage. These effects have not

been observed in humans.

12. Ecological information

Ecotoxicity Toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Product Species Test Results

BL8411

Aquatic

Acute

Crustacea LC50 Water flea (Ceriodaphnia dubia) 7.07 mg/l, 48 h
Fish LC50 Fathead minnow (Pimephales promelas) 3.37 mg/l, 96 h

Persistence and degradability

No data is available on the degradability of any ingredients in the mixture.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

cyclohexanamine 1.49 Ethanolamine -1.31

Mobility in soil No data available.

Other adverse effects The product contains volatile organic compounds which have a photochemical ozone creation

potential.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Incinerate the

material under controlled conditions in an approved incinerator. Do not incinerate sealed containers. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. If discarded, this product is considered a RCRA ignitable waste, D001. Dispose of contents/container in accordance with

local/regional/national/international regulations.

Local disposal regulationsDispose in accordance with all applicable regulations.

Hazardous waste code D001: Waste Flammable material with a flash point <140 F

D002: Waste Corrosive material [pH <=2 or =>12.5, or corrosive to steel]

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packagingSince emptied containers may retain product residue, follow label warnings even after container is

emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal.

Material name: BL8411 SDS US

14. Transport information

DOT

UN2920 **UN** number

UN proper shipping name Corrosive liquids, flammable, n.o.s., MARINE POLLUTANT

Transport hazard class(es)

Class 8 Subsidiary risk 3 8, 3 Label(s) **Packing group** Ш **Environmental hazards**

> Marine pollutant Yes

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Special provisions B2, IB2, T11, TP2, TP27

Packaging exceptions None Packaging non bulk 202 243 Packaging bulk

IATA

UN2920 **UN number**

UN proper shipping name Corrosive liquid, flammable, n.o.s.

Transport hazard class(es)

8 Class 3 Subsidiary risk Ш Packing group **Environmental hazards** Yes 8F **ERG Code**

Other information

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Passenger and cargo

aircraft

Allowed with restrictions.

Cargo aircraft only

Allowed with restrictions.

IMDG

UN number UN2920

CORROSIVE LIQUID, FLAMMABLE, N.O.S., MARINE POLLUTANT **UN** proper shipping name

Transport hazard class(es)

Class 8 3 Subsidiary risk Ш Packing group **Environmental hazards**

> Yes Marine pollutant F-E, S-C

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Not established. Transport in bulk according to Annex II of MARPOL 73/78 and

the IBC Code

DOT



Material name: BL8411 SDS US

IATA; IMDG



Marine pollutant



15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

Toxic Substances Control Act (TSCA)

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

cyclohexanamine (CAS 108-91-8) Listed.

SARA 304 Emergency release notification

Cyclohexylamine (CAS 108-91-8) 10000 LBS

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Chemical name	CAS number	Reportable quantity (pounds)	Threshold planning quantity (pounds)	Threshold planning quantity, lower value (pounds)	Threshold planning quantity, upper value (pounds)
cyclohexanamine	108-91-8	10000	10000		

SARA 311/312 Hazardous

chemical

Yes

Classified hazard categories

Flammable (gases, aerosols, liquids, or solids)

Acute toxicity (any route of exposure)

Skin corrosion or irritation

Serious eye damage or eye irritation Respiratory or skin sensitization

Reproductive toxicity

Specific target organ toxicity (single or repeated exposure)

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

cyclohexanamine (CAS 108-91-8)

Material name: BL8411 SDS US

Safe Drinking Water Act

(SDWA)

Not regulated.

US state regulations

California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
Taiwan	Taiwan Chemical Substance Inventory (TCSI)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s) A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

07-23-2021 Issue date **Revision date** 05-12-2022

Version # 04

Health: 3* **HMIS®** ratings

Flammability: 3 Physical hazard: 0 Personal protection: X

ChemTreat cannot anticipate all conditions under which this information and its product, or the Disclaimer

> products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available. Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof. ChemTreat. Inc. makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will ChemTreat, Inc. be responsible for damages of any nature whatsoever resulting from the use or reliance upon information. No representation or warranties, either expressed or implied, of merchantability, fitness for a particular purpose, or of any other nature are made hereunder with respect to information or the product to which

information refers.

Physical & Chemical Properties: Multiple Properties **Revision information**

Other information Prepared by: Product Compliance Department; ProductCompliance@chemtreat.com

Material name: BL8411 SDS US 9/9

BL8411 Version #: 04 Revision date: 05-12-2022 Issue date: 07-23-2021





SAFETY DATA SHEET

Section 1. Chemical Product and Company Identification

Product Name: ChemTreat CL5428
Product Use: Cooling Water Treatment

Supplier's Name: ChemTreat, Inc.

Emergency Telephone Number: (800)424–9300 (Toll Free)

Address (Corporate Headquarters): 5640 Cox Road

Glen Allen, VA 23060

Telephone Number for Information:(800)648-4579Date of SDS:October 16, 2020Revision Date:October 16, 2020Revision Number:20101601AN

Section 2. Hazard(s) Identification

Signal Word: None

GHS Classification(s): Non-Hazardous Substance

Hazard Statement(s): Non-Hazardous Substance

Precautionary Statement(s): No significant health risks are expected from exposures under

normal conditions of use.

Prevention: None.

Response: None.

Storage: None.

Disposal: None.

System of Classification Used: Classification under 2012 OSHA Hazard Communication Standard

(29 CFR 1910.1200).

Hazards Not Otherwise

Classified:

None.





Section 3. Composition/Hazardous Ingredients

Component	CAS Registry #	Wt.%
Components not listed are either non hazardous or in concentration of	N/A	N/A
less than 1%		

Comments If chemical identity and/or exact percentage of composition has been

withheld, this information is considered to be a trade secret.

Section 4. First Aid Measures

Inhalation: Call a POISON CENTER or doctor/physician if you feel unwell.

Eyes: Rinse cautiously with water for several minutes. Remove contact

lenses, if present and easy to do. Continue rinsing. If eye

irritation persists, get medical advice/attention.

Skin: Call a poison center or doctor/physician if you feel unwell.

Ingestion: Rinse mouth. Call a poison center or doctor/physician if you feel

unwell.

N/A

Most Important Symptoms: N/D

Indication of Immediate **Medical Attention and**

Special Treatment Needed, If

Necessary:

Section 5. Fire Fighting Measures

Flammability of the Product: Not flammable.

Suitable Extinguishing Media: Use extinguishing media suitable to surrounding fire.

Specific Hazards Arising from

the Chemical:

None known.

Protective Equipment: If product is involved in a fire, wear full protective clothing

including a positive-pressure, NIOSH approved, self-contained

breathing apparatus.





Section 6. Accidental Release Measures

Personal Precautions: Wear a self–contained breathing apparatus and appropriate

Personal Protective Equipment (PPE).

Environmental Precautions: Avoid dispersal of spilled material and runoff and contact with

soil, waterways, drains, and sewers.

Methods for Cleaning up: Contain and recover liquid when possible. Flush spill area with

water spray.

Other Statements: None.

Section 7. Handling and Storage

Handling: Wear appropriate Personal Protective Equipment (PPE) when

handling this product. Do not get in eyes, or on skin and clothing. Wash thoroughly after handling. Do not ingest. Avoid breathing

vapors, mist or dust.

Storage: Store away from incompatible materials (see Section 10). Store

at ambient temperatures. Keep container securely closed when not in use. Label precautions also apply to empty container. Recondition or dispose of empty containers in accordance with government

regulations. For Industrial use only.

Store above Freeze Point.

Section 8. Exposure Controls/Personal Protection

Exposure Limits

Component	Source	Exposure Limits
Components not listed are either non hazardous or in	N/E	N/E
concentration of less than 1%		

Engineering Controls: Use only with adequate ventilation. The use of local ventilation is

recommended to control emission near the source.





Personal Protection

Eyes: Safety glasses are recommended if risk of eye contact.

Skin: Wear butyl rubber or neoprene gloves. Wash them after

each use and replace as necessary. If conditions warrant,

wear protective clothing such as boots, aprons, and

coveralls to prevent skin contact.

Respiratory: If misting occurs, use NIOSH approved organic vapor/acid

gas dual cartridge respirator with a dust/mist prefilter in

accordance with 29 CFR 1910.134.

Section 9. Physical and Chemical Properties

Physical State and Appearance: Liquid, Light Straw, Clear

Specific Gravity: 1.146 @ 20°C

pH: 4.7 @ 20°C, 100.0%

Freezing Point: 34°F Flash Point: N/A Odor: Mild **Melting Point:** N/D **Initial Boiling Point and Boiling Range:** N/D Solubility in Water: Complete **Evaporation Rate:** N/D **Vapor Density:** N/D **Molecular Weight:** N/D

Viscosity: <100 CPS @ 20°C

Flammability (solid, gas): N/D Flammable Limits: N/A Autoignition Temperature: N/A

Density: 9.56 LB/GA

Vapor Pressure:N/D% VOC:N/DOdor ThresholdN/Dn-octanol Partition CoefficientN/DDecomposition TemperatureN/D





Section 10. Stability and Reactivity

Chemical Stability: Stable at normal temperatures and pressures.

Incompatibility with Various

Substances:

Strong oxidizers, Strong bases.

Hazardous Decomposition

Products:

Oxides of carbon.

Possibility of Hazardous

Reactions:

None known.

Reactivity: N/D

Conditions To Avoid: N/D

Section 11. Toxicological Information

Acute Toxicity

Chemical Name	Exposure	Type of Effect	Concentration	Species
N/D	N/D	N/D	N/D	N/D

Carcinogenicity Category

Component	Source	Code	Brief Description
Components not listed are either non hazardous or in	N/E	N/E	N/E
concentration of less than 1%			

Likely Routes of Exposure: N/D

Symptoms

Inhalation: N/D

Eye Contact: N/D

Skin Contact: N/D

Ingestion: N/D

Skin Corrosion/Irritation: N/D





Serious Eye Damage/Eye

Irritation:

N/D

Sensitization: N/D

Germ Cell Mutagenicity: N/D

Reproductive/Developmental

Toxicity:

N/D

Specific Target Organ Toxicity

Single Exposure: N/D

Repeated Exposure: N/D

Aspiration Hazard: N/D

Comments: None.

Section 12. Ecological Information

Ecotoxicity

Species	Duration	Type of Effect	Test Results
Ceriodaphnia dubia	48h	LC50	888 mg/l
Fathead Minnow	96h	LC50	3314 mg/l
Bluegill Sunfish	96h	LC50	>1000 mg/l
Rainbow Trout	96h	LC50	>1000 mg/l
Mysid Shrimp	48h	LC50	>1000 mg/l
Inland Silverside	86h	LC50	>1000 mg/l
Daphnia magna	48h	EC50	>1000 mg/l

Persistence and Biodegradability:

N/D

Bioaccumulative Potential:

N/D

Mobility In Soil:

N/D

Other Adverse Effects:

N/D

Comments:

Aquatic toxicity data is based on testing of a similar product.





Section 13. Disposal Considerations

Dispose of in accordance with local, state and federal regulations.

Section 14. Transport Information

Controlling					Packing
Regulation	UN/NA#:	Proper Shipping Name:	Technical Name:	Hazard Class:	Group:
DOT	N/A	COMPOUND, INDUSTRIAL	N/A	N/A	N/A
		WATER TREATMENT, LIQUID			
IMDG	N/A	COMPOUND, INDUSTRIAL	N/A	N/A	N/A
		WATER TREATMENT, LIQUID			
TDG	N/A	COMPOUND, INDUSTRIAL	N/A	N/A	N/A
		WATER TREATMENT, LIQUID			

Note: N/A

Section 15. Regulatory Information

Inventory Status

United States (TSCA):
Canada (DSL/NDSL):

All ingredients listed.
All ingredients listed.

Federal Regulations

SARA Title III Rules

Sections 311/312 Hazard Classes

Fire Hazard:
Reactive Hazard:
No
Release of Pressure:
No
Acute Health Hazard:
Yes
Chronic Health Hazard:
No





Other Sections

Component	Section 313 Toxic Chemical	Section 302 EHS TPQ	CERCLA RQ
Components not listed are either non hazardous or in	N/A	N/A	N/A
concentration of less than 1%			

Comments: None.

State Regulations

California Proposition 65: None known.

Special Regulations

Component	States
Components not listed are either non hazardous or in	None.
concentration of less than 1%	

Compliance Information

NSF: N/A

Food Regulations: N/A

KOSHER: This product has not been evaluated for Kosher approval.

Halal: This product has not been evaluated for Halal approval.

FIFRA: N/A

Other: None

Comments: None.

Section 16. Other Information

HMIS Hazard Rating

Health: 0
Flammability: 0
Physical Hazard: 0
PPE: X





Notes:

The PPE rating depends on circumstances of use. See Section 8 for recommended PPE.

The Hazardous Material Information System (HMIS) is a voluntary, subjective alpha–numeric symbolic system for recommending hazard risk and personal protection equipment information. It is a subjective rating system based on the evaluator's understanding of the chemical associated risks. The end–user must determine if the code is appropriate for their use.

Abbreviations

Abbreviation	Definition
<	Less Than
>	Greater Than
ACGIH	American Conference of Governmental Industrial Hygienists
EHS	Environmental Health and Safety Dept
N/A	Not Applicable
N/D	Not Determined
N/E	Not Established
OSHA	Occupational Health and Safety Dept
PEL	Personal Exposure Limit
STEL	Short Term Exposure Limit
TLV	Threshold Limit Value
TWA	Time Weight Average
UNK	Unknown

Prepared by: Product Compliance Department; ProductCompliance@chemtreat.com

Revision Date: October 16, 2020

Disclaimer

Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, ChemTreat, Inc. makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will ChemTreat, Inc. be responsible for damages of any nature whatsoever resulting from the use or reliance upon information. No representation or warranties, either expressed or implied, of merchantability, fitness for a particular purpose, or of any other nature are made hereunder with respect to information or the product to which information refers.

iemTreat

SAFETY DATA SHEET

1. Identification

Product identifier CT790

Other means of identification

CT790 Product code

Recommended use **Cooling Water Treatment**

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

ChemTreat, Inc. Company name 5640 Cox Road **Address**

Glen Allen, VA 23060 **United States**

Telephone 800-648-4579 Website chemtreat.com

E-mail productcompliance@chemtreat.com

Emergency phone number 800-424-9300

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Acute toxicity, inhalation Category 4

> Skin corrosion/irritation Category 1B Serious eye damage/eye irritation Category 1 Hazardous to the aquatic environment, acute Category 2

hazard

Hazardous to the aquatic environment, Category 2

long-term hazard

Not classified. **OSHA** defined hazards

Label elements

Environmental hazards



Signal word Danger

Causes severe skin burns and eye damage. Causes serious eye damage. Harmful if inhaled. **Hazard statement**

Toxic to aquatic life. Toxic to aquatic life with long lasting effects.

Precautionary statement

Do not breathe mist/vapors. Wash thoroughly after handling. Use only outdoors or in a Prevention

well-ventilated area. Avoid release to the environment. Wear protective gloves/protective

clothing/eye protection/face protection.

Response If swallowed: Rinse mouth. Do NOT induce vomiting. If on skin (or hair): Take off immediately all

contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a poison

center/doctor. Wash contaminated clothing before reuse. Collect spillage.

Storage Store locked up.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise

classified (HNOC)

None known.

Material name: CT790 SDS US CT790 Version #: 01 Issue date: 05-05-2023 724

41.01% of the mixture consists of component(s) of unknown acute inhalation toxicity. 41.01% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 41.01% of the mixture consists of component(s) of unknown long-term hazards to the aquatic environment.

3. Composition/information on ingredients

Mixtures

Ingestion

Chemical name	Common name and synonyms	CAS number	%
Phosphoric Acid		7664-38-2	40 - < 50
ZINC OXIDE		1314-13-2	10 - < 20
Other components below r	eportable levels		40 - < 50

4. First-aid measures

Inhalation Remove victim to fresh air and keep at rest in a position comfortable for breathing. Oxygen or

artificial respiration if needed. Call a poison center or doctor/physician if you feel unwell.

Take off immediately all contaminated clothing. Rinse skin with water/shower. Call a physician or Skin contact

poison control center immediately. Chemical burns must be treated by a physician. Wash

contaminated clothing before reuse.

Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if Eye contact present and easy to do. Continue rinsing. Call a physician or poison control center immediately.

Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If

vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may

Most important symptoms/effects, acute and

include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result. delayed

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Chemical burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

General information Ensure that medical personnel are aware of the material(s) involved, and take precautions to

Water fog. Foam. Dry chemical powder. Carbon dioxide (CO2).

Do not use water jet as an extinguisher, as this will spread the fire.

protect themselves.

5. Fire-fighting measures

Suitable extinguishing media

Unsuitable extinguishing

media

Specific hazards arising from the chemical

Special protective equipment and precautions for firefighters

Fire fighting

equipment/instructions

Specific methods General fire hazards During fire, gases hazardous to health may be formed.

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Move containers from fire area if you can do so without risk.

Use standard firefighting procedures and consider the hazards of other involved materials.

No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist/vapors. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Material name: CT790 SDS US 725

CT790 Version #: 01 Issue date: 05-05-2023

Methods and materials for containment and cleaning up

This material is classified as a water pollutant under the Clean Water Act and should be prevented from contaminating soil or from entering sewage and drainage systems which lead to waterways. Should not be released into the environment.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Environmental precautions

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid release to the environment. Inform appropriate managerial or supervisory personnel of all environmental releases. Prevent further leakage or spillage if safe to do so. Do not contaminate water. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Do not breathe mist/vapors. Do not get in eyes, on skin, or on clothing. Avoid prolonged exposure. Use only outdoors or in a well-ventilated area. Wear appropriate personal protective equipment. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Store in tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

Phosphoric Acid (CAS PEL 7664-38-2) ZINC OXIDE (CAS PEL	1 mg/m3	
ZINC OXIDE (CAS PEL		
1314-13-2)	5 mg/m3	Respirable fraction.
	5 mg/m3	Fume.
	15 mg/m3	Total dust.
US. OSHA Table Z-3 Permissible Exposure Limits (PEL) for Mineral Dusts (•	
Components Type	Value	Form
ZINC OXIDE (CAS TWA 1314-13-2)	5 mg/m3	Respirable fraction.
	15 mg/m3	Total dust.
	50 mppcf	Total dust.
	15 mppcf	Respirable fraction.
US. ACGIH Threshold Limit Values (TLV)		
Components Type	Value	Form
Phosphoric Acid (CAS STEL 7664-38-2)	3 mg/m3	
TWA	1 mg/m3	
ZINC OXIDE (CAS STEL 1314-13-2)	10 mg/m3	Respirable fraction.
TWA	2 mg/m3	Respirable fraction.
NIOSH. Immediately Dangerous to Life or Health (IDLH) Values, as amende	ed	
Components Type	Value	
DI	1000 mg/m3	
Phosphoric Acid (CAS IDLH 7664-38-2) ZINC OXIDE (CAS IDLH	3	

Material name: CT790 SDS US

CT790 Version #: 01 Issue date: 05-05-2023

US. NIOSH: Pocket Guide to Chemical Hazards Recommended Exposure Limits (REL)				
Components	Туре	Value	Form	
Phosphoric Acid (CAS 7664-38-2)	STEL	3 mg/m3		
	TWA	1 mg/m3		
ZINC OXIDE (CAS 1314-13-2)	Ceiling	15 mg/m3	Dust.	
	STEL	10 mg/m3	Fume.	
	TWA	5 mg/m3	Fume.	
		5 mg/m3	Dust.	

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering

controls

Good general ventilation should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Chemical respirator with organic vapor cartridge and full facepiece. Eye/face protection

Skin protection

Wear appropriate chemical resistant gloves. Hand protection Wear appropriate chemical resistant clothing. Other

Chemical respirator with organic vapor cartridge and full facepiece. Respiratory protection

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid. **Form** Liquid. Liquid Color Not available.

Mild Odor

Odor threshold Not available.

Melting point/freezing point -44.32 °F (-42.40 °C) =

Initial boiling point and boiling

range

Not available.

Not available. Flash point Not available. **Evaporation rate** Not applicable. Flammability (solid, gas)

Upper/lower flammability or explosive limits

Explosive limit - lower (%) Not available. Explosive limit - upper (%) Not available. Not available. Vapor pressure Not available. Vapor density Not available. Relative density

Solubility(ies)

Solubility (water) Not available. Not available. **Partition coefficient**

(n-octanol/water)

Not available. **Auto-ignition temperature** Not available. **Decomposition temperature**

Material name: CT790

SDS US CT790 Version #: 01 Issue date: 05-05-2023 727

Viscosity Not available.

Other information

Density14.47 lb/galExplosive propertiesNot explosive.Oxidizing propertiesNot oxidizing.

Pounds per gallon 14.47

Specific gravity ≥ 1.71 - ≤ 1.76 @ 20C

10. Stability and reactivity

Reactivity Reacts violently with strong alkaline substances. This product may react with reducing agents.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous Hazardous polymerization does not occur.

reactions

Conditions to avoid Contact with incompatible materials. Do not mix with other chemicals.

Incompatible materials Bases. Reducing agents.

Hazardous decomposition No hazardous decomposition products are known.

products

11. Toxicological information

Information on likely routes of exposure

Inhalation Harmful if inhaled.

Skin contact
Causes severe skin burns.

Eye contact
Causes serious eye damage.

Ingestion
Causes digestive tract burns.

Symptoms related to the physical, chemical and toxicological characteristics

Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including

blindness could result.

Information on toxicological effects

Acute toxicity Harmful if inhaled.

Components Species Test Results

Phosphoric Acid (CAS 7664-38-2)

Acute Dermal

LD50 Rabbit 2740 mg/kg

Oral

LD50 Rat 1530 mg/kg

ZINC OXIDE (CAS 1314-13-2)

Acute

Inhalation

LC50 Mouse > 5.7000000000000000 mg/l, 4 Hours

Oral

LD50 Rat > 5 g/kg

Skin corrosion/irritation Causes severe skin burns and eye damage.

Serious eye damage/eye

Causes serious eye damage.

irritation

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicityNo data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Not classifiable as to carcinogenicity to humans.

Material name: CT790 sps us

CT790 Version #: 01 Issue date: 05-05-2023

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Toxic to aquatic life with long lasting effects. Because of the low pH of this product, it would be **Ecotoxicity**

expected to produce significant ecotoxicity upon exposure to aquatic organisms and aquatic

Persistence and degradability

No data is available on the degradability of any ingredients in the mixture.

Bioaccumulative potential No data available. Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation

potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Dispose of this material and its container to hazardous or special waste collection point. Incinerate **Disposal instructions**

the material under controlled conditions in an approved incinerator. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical

or used container. Dispose of contents/container in accordance with

local/regional/national/international regulations.

Local disposal regulations

Dispose in accordance with all applicable regulations.

D002: Waste Corrosive material [pH ≤2 or =>12.5, or corrosive to steel] Hazardous waste code

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some

product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Since emptied containers may retain product residue, follow label warnings even after container is Contaminated packaging

emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal.

14. Transport information

DOT

UN number UN1805

UN proper shipping name

Transport hazard class(es)

Phosphoric acid solution, MARINE POLLUTANT (ZINC OXIDE)

Class 8 Subsidiary risk 8 Label(s) Ш Packing group

Environmental hazards

Marine pollutant Yes

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IATA

UN1805 **UN number**

UN proper shipping name Transport hazard class(es)

Phosphoric acid solution

Class 8 Subsidiary risk

Material name: CT790 SDS US 729

CT790 Version #: 01 Issue date: 05-05-2023

Label(s) 8
Packing group III
Environmental hazards Yes

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1805

UN proper shipping name Phosphoric acid solution, MARINE POLLUTANT

Not established.

Transport hazard class(es)

Class 8
Subsidiary risk Label(s) 8
Packing group III
Environmental hazards

Marine pollutant Yes

EmS Not assigned.

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and

the IBC Code

DOT



IATA; IMDG



Marine pollutant



General information

IMDG Regulated Marine Pollutant. DOT Regulated Marine Pollutant.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

Toxic Substances Control Act (TSCA)

Material name: CT790 sps us

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Phosphoric Acid (CAS 7664-38-2) Listed. ZINC OXIDE (CAS 1314-13-2) Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

SARA 311/312 Hazardous

Yes

chemical

Acute toxicity (any route of exposure) Classified hazard

Skin corrosion or irritation categories

Serious eye damage or eye irritation

SARA 313 (TRI reporting)

Chemical name CAS number % by wt. ZINC OXIDE 10 - < 20 1314-13-2

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act

Not regulated.

(SDWA)

FEMA Priority Substances Respiratory Health and Safety in the Flavor Manufacturing Workplace

Phosphoric Acid (CAS 7664-38-2) High priority

US state regulations

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Phosphoric Acid (CAS 7664-38-2)

California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.

International Inventories

Inventory name	On inventory (yes/no)*
Australian Inventory of Industrial Chemicals (AICIS)	Yes
Domestic Substances List (DSL)	Yes
Non-Domestic Substances List (NDSL)	No
Inventory of Existing Chemical Substances in China (IECSC)	Yes
European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
European List of Notified Chemical Substances (ELINCS)	No
Inventory of Existing and New Chemical Substances (ENCS)	Yes
Existing Chemicals List (ECL)	Yes
New Zealand Inventory	Yes
Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
Taiwan Chemical Substance Inventory (TCSI)	Yes
	Australian Inventory of Industrial Chemicals (AICIS) Domestic Substances List (DSL) Non-Domestic Substances List (NDSL) Inventory of Existing Chemical Substances in China (IECSC) European Inventory of Existing Commercial Chemical Substances (EINECS) European List of Notified Chemical Substances (ELINCS) Inventory of Existing and New Chemical Substances (ENCS) Existing Chemicals List (ECL) New Zealand Inventory Philippine Inventory of Chemicals and Chemical Substances (PICCS)

Material name: CT790 SDS US 8/9

CT790 Version #: 01 Issue date: 05-05-2023

United States & Puerto Rico Tox

Toxic Substances Control Act (TSCA) Inventory

/60

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)
A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 05-05-2023

Version # 01

HMIS® ratings Health: 3

Flammability: 0 Physical hazard: 0 Personal protection: X

Disclaimer ChemTreat, Inc. cannot anticipate all conditions under which this information and its product, or

the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available. Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, ChemTreat, Inc. makes no

representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will ChemTreat, Inc. be responsible for damages of any nature whatsoever resulting from the use or reliance upon information. No representation or warranties, either expressed or implied, of merchantability, fitness for a particular purpose, or of any other nature are made hereunder with respect to information or the product to which

information refers.

Other information Prepared by: Product Compliance Department; ProductCompliance@chemtreat.com

Material name: CT790 sps us

CT790 Version #: 01 Issue date: 05-05-2023

ChemTreat

SAFETY DATA SHEET

1. Identification

Product identifier P813E

Other means of identification

Product code P813E

Recommended use Water Clarification/Solids Conditioning

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company nameChemTreatAddress5640 Cox Road

Glen Allen, VA 23060

Telephone 800-648-4579
E-mail Not available.
Emergency phone number 800-424-9300

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Serious eye damage/eye irritation Category 2

Environmental hazards Not classified.

OSHA defined hazards Not classified.

Label elements



Signal word Warning

Hazard statement Causes serious eye irritation.

Precautionary statement

Prevention Wash thoroughly after handling. Wear eye protection/face protection.

Response If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and

easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. Take off

contaminated clothing and wash it before reuse.

Storage Store away from incompatible materials.

Disposal Dispose of waste and residues in accordance with local authority requirements.

Hazard(s) not otherwise

classified (HNOC)

None known.

Supplemental information 24.25% of the mixture consists of component(s) of unknown acute oral toxicity. 26.75% of the

mixture consists of component(s) of unknown acute dermal toxicity.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Distillates (petroleum), Hydrotreated Light		64742-47-8	20 - < 30
Alcohols, C10-16, Ethoxylated		68002-97-1	1 - < 3
Alcohols, C12-14, Ethoxylated		68439-50-9	1 - < 3
Alcohols, C12-16-ethoxylated		68551-12-2	1 - < 3
Other components below reportable	levels		70 - < 80

Material name: P813E SDS US

P813E Version #: 01 Issue date: 03-05-2021

4. First-aid measures

Inhalation Move to fresh air. Call a physician if symptoms develop or persist.

Wash off with soap and water. Get medical attention if irritation develops and persists. Skin contact

Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if Eye contact

present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

Rinse mouth. Do not induce vomiting without advice from poison control center. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Get medical attention if

symptoms occur.

Most important symptoms/effects, acute and

Ingestion

delayed

Indication of immediate medical attention and special treatment needed

Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred

vision.

Provide general supportive measures and treat symptomatically. Keep victim under observation.

Symptoms may be delayed.

General information Ensure that medical personnel are aware of the material(s) involved, and take precautions to

protect themselves.

5. Fire-fighting measures

Suitable extinguishing media

Unsuitable extinguishing media

Specific hazards arising from

the chemical

Special protective equipment and precautions for firefighters

Fire fighting equipment/instructions

Specific methods General fire hazards Alcohol resistant foam. Powder. Dry chemicals. Carbon dioxide (CO2).

Do not use water jet as an extinguisher, as this will spread the fire.

During fire, gases hazardous to health may be formed.

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Cool containers exposed to heat with water spray and remove container, if no risk is involved.

Use standard firefighting procedures and consider the hazards of other involved materials.

Will burn if involved in a fire. No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up Use water spray to reduce vapors or divert vapor cloud drift.

Large Spills: Stop the flow of material, if this is without risk, Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Environmental precautions Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Avoid contact with eyes. Avoid prolonged or repeated contact with skin. Avoid prolonged exposure. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities Keep away from heat and sources of ignition. Store in tightly closed container. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

Material name: P813E SDS US 2/6 734

US. NIOSH: Pocket Guide to Chemical Hazards

Components Type Value

Distillates (petroleum), Hydrotreated Light (CAS 64742-47-8) TWA

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Provide eyewash station.

100 mg/m3

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear appropriate chemical resistant gloves.

Other Wear suitable protective clothing.

Respiratory protection In case of insufficient ventilation, wear suitable respiratory equipment.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective

equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid.

Form Liquid. Emulsion
Color Not available.

Odor Mild

Odor threshold Not available.

pH Not available.

Melting point/freezing point 32.00 °F (0 °C) =

Initial boiling point and boiling

range

347 °F (175 °C) estimated

Flash point > 200.0 °F (> 93.3 °C) >

Evaporation rate Not available.

Flammability (solid, gas) Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower

0.7 % estimated

(%)

Flammability limit - upper

5 % estimated

(%)

Explosive limit - lower (%) Not available.

Explosive limit - upper (%) Not available.

Vapor pressure 0.64 hPa estimated

Vapor densityNot available.Relative densityNot available.

Solubility(ies)

Solubility (water) Not available.

Partition coefficient Not available.

(n-octanol/water)

Auto-ignition temperature 410 °F (210 °C) estimated

Decomposition temperature Not available. **Viscosity** 400 - 3000 cps

Material name: P813E SDS US

P813E Version #: 01 Issue date: 03-05-2021

Other information

Density 9.01 lbs/gal **Explosive properties** Not explosive.

Flammability class Combustible IIIB estimated

Oxidizing properties Not oxidizing.

Pounds per gallon 9.01

Specific gravity 1 - 1.1 @ 20C **VOC** 1 %w/w

10. Stability and reactivity

ReactivityThe product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous

reactions

No dangerous reaction known under conditions of normal use.

Conditions to avoid Avoid temperatures exceeding the flash point. Contact with incompatible materials.

Incompatible materials Strong oxidizing agents.

Hazardous decomposition

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation Prolonged inhalation may be harmful.

Skin contact No adverse effects due to skin contact are expected.

Eye contact Causes serious eye irritation.

Ingestion Expected to be a low ingestion hazard.

Symptoms related to the physical, chemical and toxicological characteristics

Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred

vision.

Information on toxicological effects

Acute toxicity Not known.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation.

Serious eye damage/eye

irritation

Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicityNo data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Not classifiable as to carcinogenicity to humans.

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

Reproductive toxicityThis product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity -

single exposure

Not applicable.

Specific target organ toxicity -

repeated exposure

P813E Version #: 01

Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful.

Issue date: 03-05-2021

Material name: P813E SDS US

4/6

12. Ecological information

EcotoxicityThe product is not classified as environmentally hazardous. However, this does not exclude the

possibility that large or frequent spills can have a harmful or damaging effect on the environment.

Persistence and degradability

No data is available on the degradability of any ingredients in the mixture.

Bioaccumulative potential

No data available. No data available.

Mobility in soil
Other adverse effects

No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructionsCollect and reclaim or dispose in sealed containers at licensed waste disposal site. Dispose of

contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations

Dispose in accordance with all applicable regulations.

Hazardous waste code

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is

emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal.

14. Transport information

DOT

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

Transport in bulk according to Annex II of MARPOL 73/78 and

Not established.

H. IDO O. I.

the IBC Code

15. Regulatory information

US federal regulationsThis product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

Toxic Substances Control Act (TSCA)

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous

Yes

chemical

Classified hazard

categories

Acute toxicity (any route of exposure) Serious eye damage or eye irritation

Specific target organ toxicity (single or repeated exposure)

Aspiration hazard

SARA 313 (TRI reporting)

Not regulated.

Material name: P813E SDS US

P813E Version #: 01 Issue date: 03-05-2021 737

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act

Not regulated.

(SDWA)

US state regulations

California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Distillates (petroleum), Hydrotreated Light (CAS 64742-47-8)

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
Taiwan	Taiwan Chemical Substance Inventory (TCSI)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 03-05-2021

Version # 01

HMIS® ratings Health: 0

Flammability: 1 Physical hazard: 0 Personal protection: X

Disclaimer ChemTreat cannot anticipate all conditions under which this information and its product, or the

products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available. Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, ChemTreat, Inc. makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will ChemTreat, Inc. be responsible for damages of any nature whatsoever resulting from the use or reliance upon information. No representation or

warranties, either expressed or implied, of merchantability, fitness for a particular purpose, or of any other nature are made hereunder with respect to information or the product to which

information refers.

Other information Prepared by: Product Compliance Department; ProductCompliance@chemtreat.com

Material name: P813E SDS US

P813E Version #: 01 Issue date: 03-05-2021





SAFETY DATA SHEET

Section 1. Chemical Product and Company Identification

Product Name: ChemTreat RL100

Product Use: Reverse Osmosis Treatment & Membrane

Supplier's Name: Cleaner Product ChemTreat, Inc.

Emergency Telephone Number: (800)424–9300 (Toll Free)

Address (Corporate Headquarters): 5640 Cox Road

Telephone Number for Information:

Glen Allen, VA 23060
(800)648–4579
Fabruary 7, 2040

Date of SDS:February 7, 2019Revision Date:February 7, 2019Revision Number:19020701AN

Section 2. Hazard(s) Identification

Signal Word: WARNING

GHS Classification(s): Eye damage/irritation – Category 2b

Acute Toxicity Dermal – Category 4 Acute Toxicity Inhalation – Category 4 Acute Toxicity Oral – Category 4

Hazard Statement(s): H320 Causes eye irritation.

H312 Harmful in contact with skin.

H332 Harmful if inhaled. H302 Harmful if swallowed.

Precautionary Statement(s): This product contains a chelating agent and ingestion of large

amounts may cause hypo-calcemic tetany with spontaneous recovery.

Prevention: P261 Avoid breathing dust/fume/gas/mist/vapors/spray.

P264 Wash thoroughly after handling.

P270 Do not eat, drink, or smoke when using this product. P271 Use only outdoors or in a well–ventilated area. P280 Wear protective gloves/protective clothing/eye

protection/face protection.





Response: P301 + P312 IF SWALLOWED: Call a POISON

CENTER or doctor/physician if you feel unwell P302 + P352 IF ON SKIN: Wash with plenty of soap

and water.

P304 + P340 IF INHALED: Remove person to fresh

air and keep comfortable for breathing P305 + P351 + P338 IF IN EYES: Rinse

cautiously with water for several minutes. Remove contact

lenses, if present and easy to do. Continue rinsing. P312 Call a POISON CENTER or doctor/physician if

you feel unwell. P330 Rinse mouth.

P337 + P313 If eye irritation persists, get medical

advice/attention.

P362 + P364 Take off contaminated clothing and wash

it before reuse.

Storage: None.

Disposal: P501 Dispose of contents and container in accordance

with applicable local, regional, national, and/or

international regulations.

System of Classification Used: Classification under 2012 OSHA Hazard Communication Standard

(29 CFR 1910.1200).

Hazards Not Otherwise

Classified:

None.

Section 3. Composition/Hazardous Ingredients

Component	CAS Registry #	Wt.%
Ethylene diamine tetraacetic acid, tetrasodium salt	64-02-8	30 – 60
Sodium hydroxide	1310-73-2	0.5 – 1.9
Nitrilotriacetic acid, trisodium salt	5064-31-3	0.1 – 1

Comments

If chemical identity and/or exact percentage of composition has been withheld, this information is considered to be a trade secret.





Section 4. First Aid Measures

Inhalation: Remove to fresh air and keep at rest in a position comfortable for

breathing. Call a poison center or doctor/physician if you feel

unwell.

Eyes: Rinse cautiously with water for several minutes. Remove contact

lenses, if present and easy to do. Continue rinsing. If eye

irritation persists, get medical advice/attention.

Skin: Wash with plenty of soap and water. Call a poison center or

doctor/physician if you feel unwell.

Ingestion: DO NOT INDUCE VOMITING. Rinse mouth. Call a POISON

CENTER or doctor/physician.

Most Important Symptoms: N/D

Indication of Immediate Medical Attention and Special Treatment Needed, If

Necessary:

N/A

Section 5. Fire Fighting Measures

Flammability of the Product: Not flammable.

Suitable Extinguishing Media: Use extinguishing media suitable to surrounding fire.

Specific Hazards Arising from

the Chemical:

Use water spray to keep containers cool.

Protective Equipment: If product is involved in a fire, wear full protective clothing

including a positive-pressure, NIOSH approved, self-contained

breathing apparatus.





Section 6. Accidental Release Measures

Personal Precautions: Use appropriate Personal Protective Equipment (PPE).

Environmental Precautions: Avoid dispersal of spilled material and runoff and contact with

soil, waterways, drains, and sewers.

Methods for Cleaning up: Contain and recover liquid when possible. Flush spill area with

water spray.

Other Statements: If RQ (Reportable Quantity) is exceeded, report to National

Spill Response Office at 1–800–424–8802.

Section 7. Handling and Storage

Handling: Wear appropriate Personal Protective Equipment (PPE) when

handling this product. Do not get in eyes, or on skin and clothing. Wash thoroughly after handling. Do not ingest. Avoid breathing

vapors, mist or dust.

Store Store away from incompatible materials (see Section 10). Store

at ambient temperatures. Keep container securely closed when not in use. Label precautions also apply to empty container. Recondition or dispose of empty containers in accordance with government

regulations. For Industrial use only.

Do not store or handle in aluminum, zinc, copper, or their alloys.

Store above Freeze Point.

Section 8. Exposure Controls/Personal Protection

Exposure Limits

Component	Source	Exposure Limits
Ethylene diamine tetraacetic acid, tetrasodium salt	N/E	N/E
Sodium hydroxide	ACGIH TLV	2 mg/m³ Ceiling
	OSHA PEL	2 mg/m³ TWA
Nitrilotriacetic acid, trisodium salt	N/E	N/E

Engineering Controls: Use only with adequate ventilation. The use of local ventilation is

recommended to control emission near the source.





Personal Protection

Eyes: Wear chemical splash goggles or safety glasses with

full-face shield. Maintain eyewash fountain in work area.

Skin: Maintain quick–drench facilities in work area.

Wear butyl rubber or neoprene gloves. Wash them after each use and replace as necessary. If conditions warrant, wear protective clothing such as boots, aprons, and

coveralls to prevent skin contact.

Respiratory: If misting occurs, use NIOSH approved organic vapor/acid

gas dual cartridge respirator with a dust/mist prefilter in

accordance with 29 CFR 1910.134.

Section 9. Physical and Chemical Properties

Physical State and Appearance: Liquid, Light Straw, Clear

Specific Gravity: 1.295 @ 20°C

pH: 13.7 @ 20°C, 100.0%

Freezing Point: <-11°F
Flash Point: N/D
Odor: Mild
Melting Point: N/A
Initial Boiling Point and Boiling Range: 220°F
Solubility in Water: Complete

Evaporation Rate: <1

Vapor Density:As WaterMolecular Weight:N/DViscosity:N/DFlammability (solid, gas):N/DFlammable Limits:N/AAutoignition Temperature:N/A

Density: 10.80 LB/GA

Vapor Pressure: <17.5

% VOC: 0
Odor Threshold N/D
n-octanol Partition Coefficient N/D
Decomposition Temperature N/D





Section 10. Stability and Reactivity

Chemical Stability: Stable at normal temperatures and pressures.

Incompatibility with Various

Substances:

Strong oxidizers, Acids, Aluminum/aluminum alloys, Zinc.

Hazardous Decomposition

Products:

Oxides of nitrogen, Ammonia.

Possibility of Hazardous

Reactions:

None known.

Reactivity: N/D

Conditions To Avoid: N/D

Section 11. Toxicological Information

Acute Toxicity

Chemical Name	Exposure	Type of Effect	Concentration	Species
Ethylene diamine tetraacetic acid, tetrasodium salt	Oral	LD50	3030 MG/KG	Rat
	Dermal	LD50	>5000 MG/KG	Rabbit
Sodium hydroxide	Oral	LD50	300 MG/KG	Rat
	Dermal	LD50	1350 MG/KG	Rabbit

Carcinogenicity Category

Component	Source	Code	Brief Description
Ethylene diamine tetraacetic acid, tetrasodium salt	N/E	N/E	N/E
Sodium hydroxide	N/E	N/E	N/E
Nitrilotriacetic acid, trisodium salt	IARC	IARC-2B	Possibly carcinogenic to humans
	MAK	MAK-3A	Possibly carcinogenic-not conclusive because of lack of
			data
	NTP	NTP-R	Reasonably anticipated to be a human carcinogen

Likely Routes of Exposure: N/D





Symptoms

Inhalation: N/D

Eye Contact: N/D

Skin Contact: N/D

Ingestion: N/D

Skin Corrosion/Irritation: N/D

Serious Eye Damage/Eye

Irritation:

N/D

Sensitization: N/D

Germ Cell Mutagenicity: N/D

Reproductive/Developmental

Toxicity:

N/D

Specific Target Organ Toxicity

Single Exposure: N/D

Repeated Exposure: N/D

Aspiration Hazard: N/D

Comments: None.

Section 12. Ecological Information

Ecotoxicity

Species	Duration	Type of Effect	Test Results
Sheepshead Minnow	96h	LC50	>1000 mg/l
Mysid Shrimp	48h	LC50	>1000 mg/l
Ceriodaphnia dubia	48h	LC50	683 mg/l
Fathead Minnow	96h	LC50	707 mg/l

Persistence and Biodegradability:

N/D

Bioaccumulative Potential:

N/D

Mobility In Soil:

N/D





Other Adverse Effects: N/D

Comments: None.

Section 13. Disposal Considerations

Dispose of in accordance with local, state and federal regulations.

EPA corrosivity characteristic hazardous waste D002 when disposed of in the original product form.

Section 14. Transport Information

Controlling					Packing
Regulation	UN/NA#:	Proper Shipping Name:	Technical Name:	Hazard Class:	Group:
DOT	UN3267	CORROSIVE LIQUID, BASIC,	(ETHYLENE DIAMINE	8	PGIII
		ORGANIC, N.O.S.	TETRAACETIC ACID,		
			TETRASODIUM SALT AND		
			SODIUM HYDROXIDE)		
TDG	UN3267	CORROSIVE LIQUID, BASIC,	(ETHYLENE DIAMINE	8	PGIII
		ORGANIC, N.O.S.	TETRAACETIC ACID,		
			TETRASODIUM SALT AND		
			SODIUM HYDROXIDE)		
ICAO	UN3267	CORROSIVE LIQUID, BASIC,	(ETHYLENE DIAMINE	8	PGIII
		ORGANIC, N.O.S.	TETRAACETIC ACID,		
			TETRASODIUM SALT AND		
			SODIUM HYDROXIDE)		

Note: When shipped by ground in the U.S., by exception 49 CFR

173.154 (d) (1) not subject to transport as a hazardous material when in authorized packaging that will not react dangerously or be degraded by the corrosive material.

Section 15. Regulatory Information

Inventory Status

United States (TSCA):
Canada (DSL/NDSL):

All ingredients listed.
All ingredients listed.





Federal Regulations

SARA Title III Rules

Sections 311/312 Hazard Classes

Fire Hazard: No
Reactive Hazard: No
Release of Pressure: No
Acute Health Hazard: Yes
Chronic Health Hazard: No

Other Sections

	Section 313	Section 302 EHS	
Component	Toxic Chemical	TPQ	CERCLA RQ
Ethylene diamine tetraacetic acid, tetrasodium salt	N/A	N/A	N/A
Sodium hydroxide	N/A	N/A	1000
Nitrilotriacetic acid, trisodium salt	N/A	N/A	N/A

Comments: None.

State Regulations

California Proposition 65: This product contains chemical(s) known to the State of

California to cause cancer and/or to cause birth defects or other reproductive harm: Nitrilotriacetate acid, trisodium

salt CAS # 5064-31-3.

Special Regulations

Component	States
Ethylene diamine tetraacetic acid, tetrasodium salt	None.
Sodium hydroxide	MA, MN, NY, PA, WA
Nitrilotriacetic acid, trisodium salt	MA

Compliance Information

NSF: Certified to NSF/ANSI Standard 60

Maximum use rate for potable water - 20 mg/L

This product ships as NSF from:

Ashland, VA Nederland, TX

Food Regulations: N/A

KOSHER: This product has not been evaluated for Kosher approval.

Halal: This product has not been evaluated for Halal approval.





FIFRA: N/A

Other: None

Comments: None.

Section 16. Other Information

HMIS Hazard Rating

Health: 2
Flammability: 0
Physical Hazard: 0
PPE: X

Notes: The PPE rating depends on circumstances of use. See

Section 8 for recommended PPE.

The Hazardous Material Information System (HMIS) is a voluntary, subjective alpha–numeric symbolic system for recommending hazard risk and personal protection equipment information. It is a subjective rating system based on the evaluator's understanding of the chemical associated risks. The end–user must determine if the code is appropriate for

their use.

Abbreviations

Abbreviation	Definition
<	Less Than
>	Greater Than
ACGIH	American Conference of Governmental Industrial Hygienists
EHS	Environmental Health and Safety Dept
N/A	Not Applicable
N/D	Not Determined
N/E	Not Established
OSHA	Occupational Health and Safety Dept
PEL	Personal Exposure Limit
STEL	Short Term Exposure Limit
TLV	Threshold Limit Value
TWA	Time Weight Average
UNK	Unknown

Prepared by: Product Compliance Department; ProductCompliance@chemtreat.com

Revision Date: February 7, 2019





Disclaimer

Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, ChemTreat, Inc. makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will ChemTreat, Inc. be responsible for damages of any nature whatsoever resulting from the use or reliance upon information. No representation or warranties, either expressed or implied, of merchantability, fitness for a particular purpose, or of any other nature are made hereunder with respect to information or the product to which information refers.





SAFETY DATA SHEET

Section 1. Chemical Product and Company Identification

Product Name: ChemTreat RL2000

Product Use: Reverse Osmosis Treatment

Supplier's Name: ChemTreat, Inc.

Emergency Telephone Number: (800)424–9300 (Toll Free)

Address (Corporate Headquarters): 5640 Cox Road

Glen Allen, VA 23060 **Telephone Number for Information:** (800)648–4579

Telephone Number for Information: (800)648–4579

Date of SDS: February 7, 2019

Revision Date: February 7, 2019

Revision Number: 19020701AN

Section 2. Hazard(s) Identification

Signal Word: WARNING

GHS Classification(s): Acute Toxicity Dermal – Category 5

Acute Toxicity Inhalation – Category 5 Acute Toxicity Oral – Category 5

Hazard Statement(s): H313 May be harmful in contact with skin.

H333 May be harmful if inhaled. H303 May be harmful if swallowed.

Precautionary Statement(s): No significant health risks are expected from exposures under

normal conditions of use.

Prevention: None.

Response: None.

Storage: None.

Disposal: None.

System of Classification Used: Classification under 2012 OSHA Hazard Communication Standard

(29 CFR 1910.1200).

Hazards Not Otherwise

Classified:

None.





Section 3. Composition/Hazardous Ingredients

Component	CAS Registry #	Wt.%
Citric acid	77–92–9	10 – 30
Sodium citrate	68-04-2	3 – 7

Comments If chemical identity and/or exact percentage of composition has been

withheld, this information is considered to be a trade secret.

Section 4. First Aid Measures

Inhalation: Remove to fresh air and keep at rest in a position comfortable for

breathing. Call a poison center or doctor/physician if you feel

unwell.

Eyes: Rinse cautiously with water for several minutes. Remove contact

lenses, if present and easy to do. Continue rinsing. If eye

irritation persists, get medical advice/attention.

Skin: Wash with plenty of soap and water. Call a poison center or

doctor/physician if you feel unwell.

Ingestion: DO NOT INDUCE VOMITING. Rinse mouth. Call a POISON

CENTER or doctor/physician if you feel unwell.

Most Important Symptoms: N/D

Indication of Immediate Medical Attention and Special Treatment Needed, If

Necessary:

N/A

Section 5. Fire Fighting Measures

Flammability of the Product: Not flammable.

Suitable Extinguishing Media: Use extinguishing media suitable to surrounding fire.

Specific Hazards Arising from

the Chemical:

Use water spray to keep containers cool.





Protective Equipment: If product is involved in a fire, wear full protective clothing

including a positive-pressure, NIOSH approved, self-contained

breathing apparatus.

Section 6. Accidental Release Measures

Personal Precautions: Use appropriate Personal Protective Equipment (PPE).

Environmental Precautions: Avoid dispersal of spilled material and runoff and contact with

soil, waterways, drains, and sewers.

Methods for Cleaning up: Contain and recover liquid when possible. Flush spill area with

water spray.

Other Statements: None.

Section 7. Handling and Storage

Handling: Wear appropriate Personal Protective Equipment (PPE) when

handling this product. Do not get in eyes, or on skin and clothing. Wash thoroughly after handling. Do not ingest. Avoid breathing

vapors, mist or dust.

Storage: Store away from incompatible materials (see Section 10). Store

at ambient temperatures. Keep container securely closed when not in use. Label precautions also apply to empty container. Recondition or dispose of empty containers in accordance with government

regulations. For Industrial use only.

Store above Freeze Point.

Section 8. Exposure Controls/Personal Protection

Exposure Limits

Component	Source	Exposure Limits
Citric acid	N/E	N/E
Sodium citrate	N/E	N/E

Engineering Controls: Use only with adequate ventilation. The use of local ventilation is

recommended to control emission near the source.





Personal Protection

Eyes: Wear chemical splash goggles or safety glasses with

full-face shield. Maintain eyewash fountain in work area.

Skin: Maintain quick-drench facilities in work area.

> Wear butyl rubber or neoprene gloves. Wash them after each use and replace as necessary. If conditions warrant, wear protective clothing such as boots, aprons, and

coveralls to prevent skin contact.

Respiratory: If misting occurs, use NIOSH approved organic vapor/acid

gas dual cartridge respirator with a dust/mist prefilter in

accordance with 29 CFR 1910.134.

N/D

Section 9. Physical and Chemical Properties

Physical State and Appearance: Liquid, Light Straw, Clear

Specific Gravity: 1.110 @ 20°C

pH: 3.5 @ 20°C, 100.0%

34°F **Freezing Point: Flash Point:** N/D Odor: Mild **Melting Point:** N/A **Initial Boiling Point and Boiling Range:** 212°F Solubility in Water: Complete **Evaporation Rate:**

Vapor Density: Similar to water

Molecular Weight: N/D **Viscosity:** N/A Flammability (solid, gas): N/D Flammable Limits: N/A **Autoignition Temperature:** N/A

Density: 9.26 LB/GA **Vapor Pressure:** Similar to water

% VOC: 0

Odor Threshold N/D n-octanol Partition Coefficient N/D **Decomposition Temperature** N/D





Section 10. Stability and Reactivity

Chemical Stability: Stable at normal temperatures and pressures.

Incompatibility with Various

Substances:

Strong oxidizers, Strong bases.

Hazardous Decomposition

Products:

Oxides of carbon.

Possibility of Hazardous

Reactions:

None known.

Reactivity: N/D

Conditions To Avoid: N/D

Section 11. Toxicological Information

Acute Toxicity

Chemical Name	Exposure	Type of Effect	Concentration	Species
N/D	N/D	N/D	N/D	N/D

Carcinogenicity Category

Component	Source	Code	Brief Description
Citric acid	N/E	N/E	N/E
Sodium citrate	N/E	N/E	N/E

Likely Routes of Exposure: N/D

Symptoms

Inhalation: N/D

Eye Contact: N/D

Skin Contact: N/D

Ingestion: N/D

Skin Corrosion/Irritation: N/D





Serious Eye Damage/Eye

Irritation:

N/D

Sensitization: N/D

Germ Cell Mutagenicity: N/D

Reproductive/Developmental

Toxicity:

N/D

Specific Target Organ Toxicity

Single Exposure: N/D

Repeated Exposure: N/D

Aspiration Hazard: N/D

Comments: None.

Section 12. Ecological Information

Ecotoxicity

Species	Duration	Type of Effect	Test Results
Ceriodaphnia dubia	48h	LC50	2176 mg/l
Fathead Minnow	96h	LC50	6830 mg/l

Persistence and

Biodegradability:

N/D

Bioaccumulative Potential: N/D

Mobility In Soil: N/D

Other Adverse Effects: N/D

Comments: None.





Section 13. Disposal Considerations

Dispose of in accordance with local, state and federal regulations. Not a RCRA–regulated hazardous waste when disposed in the original product form.

Section 14. Transport Information

Controlling					Packing
Regulation	UN/NA#:	Proper Shipping Name:	Technical Name:	Hazard Class:	Group:
DOT	N/A	COMPOUND, INDUSTRIAL	N/A	N/A	N/A
		WATER TREATMENT, LIQUID			
IMDG	N/A	COMPOUND, INDUSTRIAL	N/A	N/A	N/A
		WATER TREATMENT, LIQUID			
ICAO	N/A	COMPOUND, INDUSTRIAL	N/A	N/A	N/A
		WATER TREATMENT, LIQUID			
TDG	N/A	COMPOUND, INDUSTRIAL	N/A	N/A	N/A
		WATER TREATMENT, LIQUID			

Note: N/A

Section 15. Regulatory Information

Inventory Status

United States (TSCA): Canada (DSL/NDSL):

All ingredients listed. All ingredients listed.





Federal Regulations

SARA Title III Rules

Sections 311/312 Hazard Classes

Fire Hazard:

Reactive Hazard:

Release of Pressure:

Acute Health Hazard:

Chronic Health Hazard:

No

Other Sections

	Section 313	Section 302 EHS	
Component	Toxic Chemical	TPQ	CERCLA RQ
Citric acid	N/A	N/A	N/A
Sodium citrate	N/A	N/A	N/A

Comments: None.

State Regulations

California Proposition 65: None known.

Special Regulations

Component	States
Citric acid	None.
Sodium citrate	None.

Compliance Information

NSF: N/A

Food Regulations: N/A

KOSHER: This product has not been evaluated for Kosher approval.

Halal: This product has not been evaluated for Halal approval.

FIFRA: N/A

Other: None

Comments: None.





Section 16. Other Information

HMIS Hazard Rating

Health: 1
Flammability: 0
Physical Hazard: 0
PPE: X

Notes: The PPE rating depends on circumstances of use. See

Section 8 for recommended PPE.

The Hazardous Material Information System (HMIS) is a voluntary, subjective alpha–numeric symbolic system for recommending hazard risk and personal protection equipment information. It is a subjective rating system based on the evaluator's understanding of the chemical associated risks. The end–user must determine if the code is appropriate for

their use.

Abbreviations

Abbreviation	Definition
<	Less Than
>	Greater Than
ACGIH	American Conference of Governmental Industrial Hygienists
EHS	Environmental Health and Safety Dept
N/A	Not Applicable
N/D	Not Determined
N/E	Not Established
OSHA	Occupational Health and Safety Dept
PEL	Personal Exposure Limit
STEL	Short Term Exposure Limit
TLV	Threshold Limit Value
TWA	Time Weight Average
UNK	Unknown

Prepared by: Product Compliance Department; ProductCompliance@chemtreat.com

Revision Date: February 7, 2019





Disclaimer

Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, ChemTreat, Inc. makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will ChemTreat, Inc. be responsible for damages of any nature whatsoever resulting from the use or reliance upon information. No representation or warranties, either expressed or implied, of merchantability, fitness for a particular purpose, or of any other nature are made hereunder with respect to information or the product to which information refers.



SAFETY DATA SHEET



1. Identification

Product identifier RL2032

Other means of identification

Product code C-SERIES™ RL2032

Recommended use Reverse Osmosis and Resin Cleaner

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name ChemTreat, Inc.

Address 5640 Cox Road

Glen Allen, VA 23060 United States

Telephone800-648-4579Websitechemtreat.com

E-mail productcompliance@chemtreat.com

Emergency phone number 800-424-9300

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Skin corrosion/irritation Category 1

Serious eye damage/eye irritation Category 1

Environmental hazards Not classified.

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Causes severe skin burns and eye damage. Causes serious eye damage.

Precautionary statement

Prevention Do not breathe mist/vapors. Wash thoroughly after handling. Wear protective gloves/protective

clothing/eye protection/face protection.

Response If swallowed: Rinse mouth. Do NOT induce vomiting. If on skin (or hair): Take off immediately all

contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a poison

center/doctor. Wash contaminated clothing before reuse.

Storage Store locked up.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise

classified (HNOC)

None known.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Phosphoric Acid		7664-38-2	5 - < 10

Material name: RL2032 sps us

Chemical name	Common name and synonyms	CAS number	%
Phosphonic Acid,		2809-21-4	3 - < 5
1-(1-hydroxyethylidene)bis-			
Other components below repor	table levels		80 - < 90

4. First-aid measures

Inhalation Move to fresh air. Call a physician if symptoms develop or persist.

Skin contact Take off immediately all contaminated clothing. Rinse skin with water/shower. Call a physician or

poison control center immediately. Chemical burns must be treated by a physician. Wash

contaminated clothing before reuse.

Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if Eye contact

present and easy to do. Continue rinsing. Call a physician or poison control center immediately.

Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If

vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Most important symptoms/effects, acute and

Ingestion

delayed

Indication of immediate medical attention and special treatment needed

Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result.

Provide general supportive measures and treat symptomatically. Chemical burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim under observation. Symptoms may be delayed.

Ensure that medical personnel are aware of the material(s) involved, and take precautions to **General information** protect themselves.

5. Fire-fighting measures

Suitable extinguishing media

Unsuitable extinguishing media

Water fog. Foam. Dry chemical powder. Carbon dioxide (CO2).

Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical

During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire fighting

equipment/instructions

Move containers from fire area if you can do so without risk.

Specific methods Use standard firefighting procedures and consider the hazards of other involved materials. General fire hazards No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions. protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist/vapors. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up Should not be released into the environment.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Environmental precautions

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Prevent further leakage or spillage if safe to do so. Do not contaminate water. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Do not breathe mist/vapors. Do not get in eyes, on skin, or on clothing. Avoid prolonged exposure. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Store in tightly closed container. Store away from incompatible materials (see Section 10 of the SDS).

Material name: RL2032 SDS US 2/8

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Туре	Value	
Phosphoric Acid (CAS 7664-38-2)	PEL	1 mg/m3	
US. ACGIH Threshold Limit Value	ues		
Components	Туре	Value	
Phosphoric Acid (CAS 7664-38-2)	STEL	3 mg/m3	
	TWA	1 mg/m3	
US. NIOSH: Pocket Guide to Ch	emical Hazards		
Components	Туре	Value	
Phosphoric Acid (CAS 7664-38-2)	STEL	3 mg/m3	

Biological limit values No biological exposure limits noted for the ingredient(s).

Appropriate engineering

controls

Good general ventilation should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

1 mg/m3

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles) and a face shield.

TWA

Skin protection

Wear appropriate chemical resistant gloves. Hand protection Other Wear appropriate chemical resistant clothing.

In case of insufficient ventilation, wear suitable respiratory equipment. Respiratory protection

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective

equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Liquid. Physical state **Form** Liquid. Amber Color Mild Odor

Odor threshold Not available. 0 - 1@ 20°C рH 32.72 °F (0.40 °C) Melting point/freezing point Initial boiling point and boiling Not available.

range

Not available. Flash point Not available. **Evaporation rate** Flammability (solid, gas) Not applicable. Upper/lower flammability or explosive limits

Flammability limit - lower Not available.

(%)

Material name: RL2032 3/8

C-SERIES™ RL2032 Version #: 02 Revision date: 04-03-2023 Issue date: 02-17-2023 Flammability limit - upper

(%)

Not available.

Explosive limit - lower (%)

Not available.

Not available.

Explosive limit - upper (%) Vapor pressure

Not available.

Vapor density Relative density

Not available.

Solubility(ies)

Solubility (water)
Partition coefficient

Not available.

Not available.

(n-octanol/water)

Auto-ignition temperature Not available.

Decomposition temperature Not available.

Viscosity 0 - 200 cps

Other information

Explosive properties Not explosive. **Oxidizing properties** Not oxidizing.

Pounds per gallon 9.21

10. Stability and reactivity

Reactivity Reacts violently with strong alkaline substances. This product may react with reducing agents.

Contact with incompatible materials. Do not mix with other chemicals.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous Hazardous polymerization does not occur.

reactions

Incompatible materials Bases. Reducing agents.

Hazardous decomposition

Conditions to avoid

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May cause irritation to the respiratory system. Prolonged inhalation may be harmful.

Skin contact
Causes severe skin burns.

Eye contact
Causes serious eye damage.
Ingestion
Causes digestive tract burns.

Symptoms related to the physical, chemical and toxicological characteristics

Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including

blindness could result.

Information on toxicological effects

Acute toxicity Not known.

Components Species Test Results

Phosphoric Acid (CAS 7664-38-2)

<u>Acute</u> Dermal

LD50 Rabbit 2740 mg/kg

Oral

LD50 Rat 1530 mg/kg

Skin corrosion/irritation Causes severe skin burns and eye damage.

Serious eye damage/eye

Causes serious eye damage.

irritation

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Material name: RL2032 SDS U

C-SERIES™ RL2032 Version #: 02 Revision date: 04-03-2023 Issue date: 02-17-2023

This product is not expected to cause skin sensitization. Skin sensitization

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Not classifiable as to carcinogenicity to humans. Carcinogenicity

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

This product is not expected to cause reproductive or developmental effects. Reproductive toxicity

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity Because of the low pH of this product, it would be expected to produce significant ecotoxicity upon

exposure to aquatic organisms and aquatic systems.

Persistence and degradability

No data is available on the degradability of any ingredients in the mixture.

Bioaccumulative potential

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation

potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Incinerate the **Disposal instructions**

material under controlled conditions in an approved incinerator. Do not allow this material to drain

into sewers/water supplies. Dispose of contents/container in accordance with

local/regional/national/international regulations.

Local disposal regulations

Dispose in accordance with all applicable regulations.

Hazardous waste code

D002: Waste Corrosive material [pH <=2 or =>12.5, or corrosive to steel]

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is

emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal.

14. Transport information

DOT

UN1760 **UN number**

Corrosive liquids, n.o.s. (Phosphoric Acid) **UN proper shipping name**

Transport hazard class(es)

Class 8 Subsidiary risk 8 Label(s) **Packing group**

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Special provisions B2, IB2, T11, TP2, TP27

154 Packaging exceptions 202 Packaging non bulk 242 Packaging bulk Reportable quantity (RQ lbs) 66667

Material name: RL2032 SDS US

IATA

UN1760 **UN** number

UN proper shipping name Corrosive liquid, n.o.s. (Phosphoric Acid)

Transport hazard class(es)

Class 8 Subsidiary risk П Packing group **Environmental hazards** No. 8L **ERG Code**

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo

aircraft

Allowed with restrictions.

Cargo aircraft only Allowed with restrictions.

IMDG

UN number UN1760

UN proper shipping name CORROSIVE LIQUID, N.O.S. (Phosphoric Acid)

Transport hazard class(es)

8 **Class** Subsidiary risk Ш **Packing group Environmental hazards**

Marine pollutant No. **EmS** F-A. S-B

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Not established. Annex II of MARPOL 73/78 and

the IBC Code

DOT



IATA; IMDG



15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

Toxic Substances Control Act (TSCA)

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Phosphoric Acid (CAS 7664-38-2) Listed.

Material name: RL2032 SDS US 6/8 C-SERIES™ RL2032 Version #: 02 Revision date: 04-03-2023

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous

Yes

chemical

Classified hazard Skin corrosion or irritation

categories Serious eye damage or eye irritation

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act

Not regulated.

(SDWA)

FEMA Priority Substances Respiratory Health and Safety in the Flavor Manufacturing Workplace

Phosphoric Acid (CAS 7664-38-2) High priority

US state regulations

California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Phosphoric Acid (CAS 7664-38-2)

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
Taiwan	Taiwan Chemical Substance Inventory (TCSI)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

Compliance Information: Kosher

This product is certified by the Orthodox Unionas Kosher pareve

Only when prepared by the following ChemTreat facilities:

Nederland, TX

Material name: RL2032 SDS US

C-SERIES™ RL2032 Version #: 02 Revision date: 04-03-2023 Issue date: 02-17-2023

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).



Compliance Information: NSF Whitebook

Compliance Information: NSF Standard 60

This product is certified to NSF/ANSI Standard 60 for the following approved function:Membrane Cleaner. This product is designed to be used off-line and flushed out prior to using the system for drinking water. This product ships as NSF from: 09131 - Nederland TX



16. Other information, including date of preparation or last revision

 Issue date
 02-17-2023

 Revision date
 04-03-2023

Version # 02

HMIS® ratings Health: 3

Flammability: 0 Physical hazard: 0 Personal protection: B

Disclaimer ChemTreat, Inc. cannot anticipate all conditions under which this information and its product, or

the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available. Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, ChemTreat, Inc. makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will ChemTreat, Inc. be responsible for damages of any nature whatsoever resulting from the use or reliance upon information. No representation or warranties, either expressed or implied, of merchantability, fitness for a particular purpose, or of

any other nature are made hereunder with respect to information or the product to which

information refers.

Revision information Product and Company Identification: Product and Company Identification

Composition / Information on Ingredients: Component Summary

Physical & Chemical Properties: Multiple Properties
Transport Information: Material Transportation Information
Regulatory information: Compliance Information:Kosher

Regulatory information: Compliance Information: NSF Location (STD-60)

Other information Prepared by: Product Compliance Department; ProductCompliance@chemtreat.com

Material name: RL2032 SDS US

ChemTreat

SAFETY DATA SHEET



1. Identification

Product identifier RL3400

Other means of identification

Product code C-SERIES™ RL3400

Recommended use Reverse Osmosis and Resin Cleaner

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name ChemTreat, Inc.

Address 5640 Cox Road

Glen Allen, VA 23060

Telephone United States 800-648-4579 Website chemtreat.com

E-mail productcompliance@chemtreat.com

Emergency phone number 800-424-9300

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Skin corrosion/irritation Category 1

Serious eye damage/eye irritation Category 1

Environmental hazards Not classified.

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Causes severe skin burns and eye damage. Causes serious eye damage.

Precautionary statement

Prevention Do not breathe mist/vapors. Wash thoroughly after handling. Wear protective gloves/protective

clothing/eye protection/face protection.

Response If swallowed: Rinse mouth. Do NOT induce vomiting. If on skin (or hair): Take off immediately all

contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a poison

center/doctor. Wash contaminated clothing before reuse.

Storage Store locked up.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise

classified (HNOC)

None known.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Sodium hydroxide		1310-73-2	1 - < 3
Other components below r	eportable levels		90 - 100

Material name: RL3400 sps us

4. First-aid measures

Inhalation

Move to fresh air. Call a physician if symptoms develop or persist.

Skin contact

Take off immediately all contaminated clothing. Rinse skin with water/shower. Call a physician or poison control center immediately. Chemical burns must be treated by a physician. Wash

contaminated clothing before reuse.

Eye contact

Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a physician or poison control center immediately.

Ingestion

Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If

vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Most important

symptoms/effects, acute and delayed

Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Chemical burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim under observation. Symptoms may be delayed.

General information

Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.

5. Fire-fighting measures

Suitable extinguishing media

Unsuitable extinguishing media

Do not use water jet as an extinguisher, as this will spread the fire.

Water fog. Foam. Dry chemical powder. Carbon dioxide (CO2).

Specific hazards arising from the chemical

During fire, gases hazardous to health may be formed.

Special protective equipment

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

and precautions for firefighters

Fire fighting equipment/instructions Move containers from fire area if you can do so without risk.

Specific methods

Use standard firefighting procedures and consider the hazards of other involved materials.

General fire hazards

No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist/vapors. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Do not breathe mist/vapors. Do not get in eyes, on skin, or on clothing. Avoid prolonged exposure. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities Store locked up. Store in tightly closed container. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

Material name: RL3400 SDS US

Issue dete: 02-23-2023

US. OSHA Table Z-1 Permissible Exposure Limits (PEL) for Air Contaminants (29 CFR 1910.1000)

Components Value Type Sodium hydroxide (CAS PEL 2 mg/m3

1310-73-2)

US. ACGIH Threshold Limit Values (TLV)

Value Components Type Sodium hydroxide (CAS Ceiling 2 mg/m3

1310-73-2)

NIOSH. Immediately Dangerous to Life or Health (IDLH) Values, as amended

Components Type Value Sodium hydroxide (CAS **IDLH** 10 mg/m3 1310-73-2)

US. NIOSH: Pocket Guide to Chemical Hazards Recommended Exposure Limits (REL) Components Type

Sodium hydroxide (CAS Ceiling 2 mg/m3

1310-73-2)

Biological limit values No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Wear safety glasses with side shields (or goggles) and a face shield. Eye/face protection

Skin protection

Hand protection Wear appropriate chemical resistant gloves. Wear appropriate chemical resistant clothing. Other

Respiratory protection In case of insufficient ventilation, wear suitable respiratory equipment.

Wear appropriate thermal protective clothing, when necessary. Thermal hazards

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective

equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Liquid. Physical state Liquid. **Form** Straw Color Odor Mild

Odor threshold Not available.

12 - 14

Melting point/freezing point 20.84 °F (-6.20 °C)

Initial boiling point and boiling

Not available.

range

Not available. Flash point **Evaporation rate** Not available. Flammability (solid, gas) Not applicable. Upper/lower flammability or explosive limits

Explosive limit - lower (%) Not available. Explosive limit - upper (%) Not available.

-0.01 hPa estimated Vapor pressure

Not available. Vapor density Relative density Not available.

Material name: RL3400 SDS US

C-SERIES™ RL3400 Version #: 03 Revision date: 05-23-2023 Issu9-date: 02-23-2023 Solubility(ies)

Solubility (water) Not available.

Partition coefficient Not available.

(n-octanol/water)

Auto-ignition temperature Not available.

Decomposition temperature Not available.

Viscosity 0 - 200 cps

Other information

Explosive properties Not explosive. **Oxidizing properties** Not oxidizing.

Pounds per gallon 9.99

Specific gravity 1.17 - 1.22 @ 20°C

10. Stability and reactivity

Reactivity Reacts violently with strong acids. This product may react with oxidizing agents.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous Hazardous polymerization does not occur.

reactions

Conditions to avoid Contact with incompatible materials. Do not mix with other chemicals.

Incompatible materials Strong acids. Oxidizing agents.

Hazardous decomposition

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May cause irritation to the respiratory system. Prolonged inhalation may be harmful.

Skin contactCauses severe skin burns.Eye contactCauses serious eye damage.IngestionCauses digestive tract burns.

Symptoms related to the physical, chemical and toxicological characteristics

Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result.

Information on toxicological effects

Acute toxicity Not known.

Components Species Test Results

Sodium hydroxide (CAS 1310-73-2)

Acute Dermal

LD50 Rabbit 1350 mg/kg

Oral

LD50 Rat 140 - 340 mg/kg

Skin corrosion/irritation Causes severe skin burns and eye damage.

Serious eye damage/eye

Causes serious eye damage.

irritation

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicityNo data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Risk of cancer cannot be excluded with prolonged exposure.

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

Material name: RL3400 sps us

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

Reproductive toxicity This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity -

single exposure

Specific target organ toxicity -

repeated exposure

Not classified.

Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not exclude the

possibility that large or frequent spills can have a harmful or damaging effect on the environment.

Components **Species Test Results**

Sodium hydroxide (CAS 1310-73-2)

Aquatic Acute

EC50 Water flea (Ceriodaphnia dubia) >= 34.59 - <= 47.13 mg/l, 48 hours Crustacea

No data is available on the degradability of any ingredients in the mixture.

Fish LC50 Western mosquitofish (Gambusia affinis) 125 mg/l, 96 hours

Persistence and degradability

Bioaccumulative potential No data available. No data available. Mobility in soil

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation

potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Incinerate the

material under controlled conditions in an approved incinerator. Dispose of contents/container in

accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

D002: Waste Corrosive material [pH ≤2 or =>12.5, or corrosive to steel] Hazardous waste code

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is

emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal.

14. Transport information

DOT

UN number

UN proper shipping name Corrosive liquid, basic, inorganic, n.o.s. (Sodium hydroxide)

Transport hazard class(es)

Class 8 Subsidiary risk 8 Label(s) Packing group Ш **Environmental hazards**

Marine pollutant

No.

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Special provisions B2, IB2, T11, TP2, TP27

Packaging exceptions 154 202 Packaging non bulk

Material name: RL3400 SDS US Packaging bulk 242 Reportable Quantity (LBS) 18832

IATA

UN number UN3266

UN proper shipping name Corrosive liquid, basic, inorganic, n.o.s. (Sodium hydroxide)

Transport hazard class(es)

8 Class Subsidiary risk Ш Packing group **Environmental hazards** No. **ERG Code** 8L

Other information

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Passenger and cargo

aircraft

Allowed with restrictions.

Allowed with restrictions. Cargo aircraft only

IMDG

UN3266 **UN** number

UN proper shipping name Transport hazard class(es)

CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S. (SODIUM HYDROXIDE)

8 Class Subsidiary risk П Packing group

Environmental hazards

Marine pollutant No. **EmS** F-A, S-B

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Not established. Annex II of MARPOL 73/78 and

the IBC Code

DOT



IATA; IMDG



15. Regulatory information

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication **US federal regulations**

Standard, 29 CFR 1910.1200.

Toxic Substances Control Act (TSCA)

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

Material name: RL3400 SDS US

C-SERIES™ RL3400 Version #: 03 Revision date: 05-23-2023

CERCLA Hazardous Substance List (40 CFR 302.4)

Sodium hydroxide (CAS 1310-73-2)

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous

chemical

Classified hazard Skin corrosion or irritation

Yes

categories Serious eye damage or eye irritation

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act

Not regulated.

Inventory name

(SDWA)

US state regulations

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Listed.

Sodium hydroxide (CAS 1310-73-2)

California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.

International Inventories

Country(s) or region

		(,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
Australia	Australian Inventory of Industrial Chemicals (AICIS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
Taiwan	Taiwan Chemical Substance Inventory (TCSI)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

Compliance Information: Halal

Not established.

Compliance Information: Kosher

This product is certified by the Orthodox Unionas Kosher pareve

Only when prepared by the following ChemTreat facilities:

Material name: RL3400 sps us

On inventory (yes/no)*

Ashland, VA Nederland, TX



Compliance Information: NSF Whitebook

Compliance Information: NSF Standard 60

This product is certified to NSF/ANSI Standard 60 for the following approved function: Membrane Cleaner. This product is designed to be used off-line and flushed out prior to using the system for drinking water. This product ships as NSF from:

09131 - Nederland TX 09132 - Ashland VA



16. Other information, including date of preparation or last revision

 Issue date
 02-23-2023

 Revision date
 05-23-2023

Version # 03

HMIS® ratings Health: 3

Flammability: 0 Physical hazard: 0 Personal protection: B

Disclaimer ChemTreat, Inc. cannot anticipate all conditions under which this information and its product, or

the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available. Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, ChemTreat, Inc. makes no

representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will ChemTreat, Inc. be responsible for damages of any nature whatsoever resulting from the use or reliance upon information. No representation or warranties, either expressed or implied, of merchantability, fitness for a particular purpose, or of any other nature are made hereunder with respect to information or the product to which

information refers.

Revision information Product and Company Identification: Certifications

Composition / Information on Ingredients: Ingredients Physical & Chemical Properties: Multiple Properties

Physical and chemical properties: Color

Regulatory information: Compliance Information:Kosher Location Regulatory information: Compliance Information:NSF Location (STD-60)

GHS: Classification

Other information Prepared by: Product Compliance Department; ProductCompliance@chemtreat.com

Material name: RL3400 SDS US

ChemTreat

SAFETY DATA SHEET



1. Identification

Product identifier RL9009

Other means of identification

Product code RL9009

Recommended use Reverse Osmosis Treatment

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name ChemTreat, Inc.

Address 5640 Cox Road

Glen Allen, VA 23060 United States

Telephone 800-648-4579
Website chemtreat.com

E-mail productcompliance@chemtreat.com

Emergency phone number 800-424-9300

2. Hazard(s) identification

Physical hazardsCorrosive to metalsCategory 1Health hazardsSkin corrosion/irritationCategory 1BSerious eye damage/eye irritationCategory 1

Environmental hazards Not classified.

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Causes severe skin burns and eye damage. Causes serious eye damage.

Precautionary statement

Prevention Do not breathe mist/vapors. Wash thoroughly after handling. Wear protective gloves/protective

clothing/eye protection/face protection.

Response If swallowed: Rinse mouth. Do NOT induce vomiting. If on skin (or hair): Take off immediately all

contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a poison

center/doctor. Wash contaminated clothing before reuse.

Storage Store locked up.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise

classified (HNOC)

None known.

Supplemental information 19.38% of the mixture consists of component(s) of unknown acute oral toxicity. 26.08% of the

mixture consists of component(s) of unknown acute dermal toxicity. 26.08% of the mixture consists of component(s) of unknown acute inhalation toxicity. 24.43% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 24.43% of the mixture consists of component(s) of unknown long-term hazards to the aquatic environment.

3. Composition/information on ingredients

Mixtures

Material name: RL9009 sps us

RL9009 Version #: 02 Revision date: 04-11-2023 Issue date: 08-09-2926

Chemical name	Common name and synonyms	CAS number	%
2-Butenedioic acid (Z)-, homopolymer		26099-09-2	5 - < 10
2-phosphonobutane-1,2,4-tricarbox ylic Acid		37971-36-1	5 - < 10
Diethylenetriaminepenta(methylene Phosphonic Acid), Sodium Salt		22042-96-2	5 - < 10
Other components below reportable	levels		80 - < 90

4. First-aid measures

Inhalation Skin contact Move to fresh air. Call a physician if symptoms develop or persist.

Take off immediately all contaminated clothing. Rinse skin with water/shower. Call a physician or

poison control center immediately. Chemical burns must be treated by a physician. Wash

contaminated clothing before reuse.

Eye contact

Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a physician or poison control center immediately.

Ingestion

Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Most important

symptoms/effects, acute and delayed

Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Chemical burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim under observation. Symptoms may be delayed.

General information

Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.

5. Fire-fighting measures

Suitable extinguishing media

Unsuitable extinguishing media

Water fog. Foam. Dry chemical powder. Carbon dioxide (CO2). Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical

During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire fighting

equipment/instructions

Move containers from fire area if you can do so without risk.

Specific methods General fire hazards Use standard firefighting procedures and consider the hazards of other involved materials.

No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist/vapors. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up Should not be released into the environment.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Environmental precautions

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Prevent further leakage or spillage if safe to do so. Do not contaminate water. Avoid discharge into drains, water courses or onto the ground.

Material name: RL9009 SDS US

7. Handling and storage

Precautions for safe handling Do not breathe mist/vapors. Do not get in eyes, on skin, or on clothing. Avoid prolonged exposure.

Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good

industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Store in tightly closed container. Store away from incompatible materials (see

Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

US. OARS. Workplace Environmental Exposure Level (WEEL) Guide

ComponentsTypeValueForm2-phosphonobutane-1,2,4-tr
icarboxylic Acid (CASTWA10 mg/m3Aerosol.

37971-36-1)

Biological limit values No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles) and a face shield.

Skin protection

Hand protection Wear appropriate chemical resistant gloves.Other Wear appropriate chemical resistant clothing.

Respiratory protection In case of insufficient ventilation, wear suitable respiratory equipment.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective

equipment to remove contaminants.

9. Physical and chemical properties

Appearance Clear
Physical state Liquid.
Form Liquid. Liquid

Color Amber
Odor Mild

Odor thresholdNot available.pH $\geq 1.8 - \leq 3 \otimes 100\%$ Melting point/freezing point $36.50 \,^{\circ}\text{F} \, (2.50 \,^{\circ}\text{C})$

Initial boiling point and boiling

Not available.

range

Flash point Not available.

Evaporation rate Not available.

Flammability (solid, gas) Not applicable.

Upper/lower flammability or explosive limits

Explosive limit - lower (%) Not available.

Explosive limit - upper (%) Not available.

Vapor pressure -0.01 hPa estimated

Vapor density Not available.

Relative density Not available.

Material name: RL9009 SDS US

RL9009 Version #: 02 Revision date: 04-11-2023 Issue date: 08-09-2923

Solubility(ies)

Solubility (water) Not available.

Partition coefficient Not available.

(n-octanol/water)

Auto-ignition temperatureNot available.Decomposition temperatureNot available.Viscosity> 0 - < 200 cps</th>

Other information

Explosive properties Not explosive. **Oxidizing properties** Not oxidizing.

Pounds per gallon 9.52

Specific gravity ≥ 1.29 - ≤ 1.14 @ 20C

10. Stability and reactivity

Reactivity Reacts violently with strong alkaline substances. This product may react with reducing agents.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous Hazardous polymerization does not occur.

reactions

Conditions to avoid Contact with incompatible materials. Do not mix with other chemicals.

Incompatible materials Bases. Reducing agents.

Hazardous decomposition

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May cause irritation to the respiratory system. Prolonged inhalation may be harmful.

Skin contactCauses severe skin burns.Eye contactCauses serious eye damage.IngestionCauses digestive tract burns.

Symptoms related to the physical, chemical and toxicological characteristics

Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result.

Information on toxicological effects

Acute toxicity Not known.

Skin corrosion/irritation Causes severe skin burns and eye damage.

Serious eye damage/eye

irritation

Causes serious eye damage.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicityNo data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Not classifiable as to carcinogenicity to humans.

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

Reproductive toxicityThis product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity - Not classified.

single exposure

Material name: RL9009 SDS US

RL9009 Version #: 02 Revision date: 04-11-2023 Issue date: 08-09-2926

Specific target organ toxicity -

repeated exposure

Not classified.

Aspiration hazard

Not an aspiration hazard.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity

Because of the low pH of this product, it would be expected to produce significant ecotoxicity upon

exposure to aquatic organisms and aquatic systems.

Persistence and degradability

No data is available on the degradability of any ingredients in the mixture.

Bioaccumulative potential Mobility in soil

No data available. No data available.

Other adverse effects

No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions

Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Incinerate the material under controlled conditions in an approved incinerator. Do not allow this material to drain into sewers/water supplies. Dispose of contents/container in accordance with

local/regional/national/international regulations.

Local disposal regulations

Dispose in accordance with all applicable regulations.

Hazardous waste code

D002: Waste Corrosive material [pH ≤2 or =>12.5, or corrosive to steel]

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging

Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal.

14. Transport information

DOT

UN3265 **UN** number

Corrosive liquid, acidic, organic, n.o.s. (2-phosphonobutane-1,2,4-tricarboxylic Acid and **UN proper shipping name**

Diethylenetriaminepenta(methylene Phosphonic Acid))

Transport hazard class(es)

Class 8 Subsidiary risk 8 Label(s) Packing group Ш **Environmental hazards**

> Marine pollutant No.

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Special provisions B2, IB2, T11, TP2, TP27

Packaging exceptions 154 202 Packaging non bulk Packaging bulk 242

IATA

UN3265 UN number

Corrosive liquid, acidic, organic, n.o.s. (2-phosphonobutane-1,2,4-tricarboxylic Acid and **UN proper shipping name**

Diethylenetriaminepenta(methylene Phosphonic Acid))

Transport hazard class(es)

8 Class Subsidiary risk 8 Label(s) Ш Packing group **Environmental hazards** No.

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN3265 **UN** number

Material name: RL9009 SDS US **UN** proper shipping name Corrosive liquid, acidic, organic, n.o.s. (2-phosphonobutane-1,2,4-tricarboxylic Acid and

Diethylenetriaminepenta(methylene Phosphonic Acid))

Transport hazard class(es)

Class 8 Subsidiary risk 8 Label(s) Ш Packing group

Environmental hazards

Marine pollutant No.

EmS Not assigned.

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Not established.

Transport in bulk according to Annex II of MARPOL 73/78 and

the IBC Code

DOT



IATA; IMDG



15. Regulatory information

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication **US** federal regulations

Standard, 29 CFR 1910.1200.

Toxic Substances Control Act (TSCA)

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1053)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous Yes

chemical

Classified hazard Corrosive to metal Skin corrosion or irritation categories

Serious eye damage or eye irritation

Material name: RL9009 SDS US

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act

Not regulated.

(SDWA)

US state regulations

California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. For more information go to www.P65Warnings.ca.gov.

International Inventories

Country(s) or region	Inventory name On	inventory (yes/no)*
Australia	Australian Inventory of Industrial Chemicals (AICIS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
Taiwan	Taiwan Chemical Substance Inventory (TCSI)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes
*Δ "Ves" indicates that all compo	opents of this product comply with the inventory requirements administered by the governing	(country(s)

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

Compliance Information: Halal

Compliance Information: Kosher

This product is certified by the Orthodox Unionas Kosher pareve

Ashland VA Eldridge IA Nederland TX



Compliance Information: NSF Whitebook

Compliance Information: NSF Standard 60

This product is certified to NSF/ANSI Standard 60 for the following approved function:RO Antiscalant. Maximum use rate for potable water - 20. This product ships as NSF from:

09132 - Ashland VA 09133 - Eldridge IA 09131 - Nederland TX

Material name: RL9009 SDS US

RL9009 Version #: 02 Revision date: 04-11-2023 Issue date: 08-09-2023

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).



16. Other information, including date of preparation or last revision

 Issue date
 08-09-2022

 Revision date
 04-11-2023

Version # 02

HMIS® ratings Health: 1

Flammability: 0 Physical hazard: 0 Personal protection: X

Disclaimer ChemTreat, Inc. cannot anticipate all conditions under which this information and its product, or

the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available. Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, ChemTreat, Inc. makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will ChemTreat, Inc. be responsible for damages of any nature whatsoever resulting from the use or reliance upon information. No representation or warranties, either expressed or implied, of merchantability, fitness for a particular purpose, or of any other nature are made hereunder with respect to information or the product to which

information refers.

Revision information Transport Information: Material Transportation Information

Other information Prepared by: Product Compliance Department; ProductCompliance@chemtreat.com

Material name: RL9009 sps us

From: CERS Automated Messaging - DO NOT REPLY < DoNot.ReplyTo.Cers@calepa.ca.gov>

Tuesday, February 13, 2024 10:02 AM Sent:

To: Mahnaz Ghamati

Subject: Aboveground Petroleum Storage Act for CERS ID 10453255 Accepted By Regulator

WARNING: EXTERNAL EMAIL. Exercise caution when opening links or attachments.

Your Aboveground Petroleum Storage Act submittal on January 19, 2024 for Mojave Solar LLC (CERS ID 10453255) was Accepted by San Bernardino County Fire Department on February 13, 2024. This indicates the regulator has reviewed the submittal element and finds the data/documents meet state and local reporting requirements. The regulator has not necessarily field-verified the submitted data. Any comments from the regulator are shown below.

Accepted pending field verification. If you have any questions, please contact Aleasha Enciso at aenciso@sbcfire.org or (909) 386-8401.

Facility Name: Mojave Solar LLC

CERS ID: 10453255

Facility Address: 42134 Harper Lake Rd, Hinkley, CA 92347

This is an automated email sent from the CERS System. Please DO NOT REPLY.

This is a courtesy email sent to you from the California Environmental Reporting System http://cers.calepa.ca.gov/
Contact: CERS Technical Assistance (cers@calepa.ca.gov)

~~GLG5D8M~~

From: CERS Automated Messaging - DO NOT REPLY < DoNot.ReplyTo.Cers@calepa.ca.gov>

Tuesday, February 13, 2024 10:07 AM Sent:

To: Mahnaz Ghamati

Subject: Emergency Response and Training Plans for CERS ID 10453255 Accepted By Regulator

WARNING: EXTERNAL EMAIL. Exercise caution when opening links or attachments.

Your Emergency Response and Training Plans submittal on January 22, 2024 for Mojave Solar LLC (CERS ID 10453255) was Accepted by San Bernardino County Fire Department on February 13, 2024. This indicates the regulator has reviewed the submittal element and finds the data/documents meet state and local reporting requirements. The regulator has not necessarily field-verified the submitted data. Any comments from the regulator are shown below.

Accepted pending field verification. If you have any questions, please contact Aleasha Enciso at aenciso@sbcfire.org or (909) 386-8401.

Facility Name: Mojave Solar LLC

CERS ID: 10453255

Facility Address: 42134 Harper Lake Rd, Hinkley, CA 92347

This is an automated email sent from the CERS System. Please DO NOT REPLY.

This is a courtesy email sent to you from the California Environmental Reporting System http://cers.calepa.ca.gov/
Contact: CERS Technical Assistance (cers@calepa.ca.gov)

~~I3ED7KY~~

From: CERS Automated Messaging - DO NOT REPLY < DoNot.ReplyTo.Cers@calepa.ca.gov>

Tuesday, February 13, 2024 10:21 AM Sent:

To: Mahnaz Ghamati

Subject: Facility Information for CERS ID 10453255 Accepted By Regulator

WARNING: EXTERNAL EMAIL. Exercise caution when opening links or attachments.

Your Facility Information submittal on February 13, 2024 for Mojave Solar LLC (CERS ID 10453255) was Accepted by San Bernardino County Fire Department on February 13, 2024. This indicates the regulator has reviewed the submittal element and finds the data/documents meet state and local reporting requirements. The regulator has not necessarily field-verified the submitted data. Any comments from the regulator are shown below.

Accepted pending field verification. If you have any questions, please contact Aleasha Enciso at aenciso@sbcfire.org or (909) 386-8401.

Facility Name: Mojave Solar LLC

CERS ID: 10453255

Facility Address: 42134 Harper Lake Rd, Hinkley, CA 92347

This is an automated email sent from the CERS System. Please DO NOT REPLY.

This is a courtesy email sent to you from the California Environmental Reporting System http://cers.calepa.ca.gov/
Contact: CERS Technical Assistance (cers@calepa.ca.gov)

~~YTXZSAJ~~

From: CERS Automated Messaging - DO NOT REPLY < DoNot.ReplyTo.Cers@calepa.ca.gov>

Tuesday, February 13, 2024 10:03 AM Sent:

To: Mahnaz Ghamati

Subject: Facility Information for CERS ID 10453255 Not Accepted By Regulator

WARNING: EXTERNAL EMAIL. Exercise caution when opening links or attachments.

DO NOT REPLY directly to this automated email sent from the CERS System. Direct any response to your local regulator.

Your Facility Information submittal on January 22, 2024 for Mojave Solar LLC (CERS ID 10453255) was Not Accepted by San Bernardino County Fire Department on February 13, 2024. This indicates the regulator has reviewed the submittal element and finds the data/documents do not meet state and local reporting requirements. The regulator's review comments are shown below.

SUPERSEDED: The information in this submittal is no longer current. A more recent submittal has been submitted and will be reviewed. No further action is required for this submittal. If you have any questions, please contact Aleasha Enciso at aenciso@sbcfire.org or (909) 386-8401.

Facility Name: Mojave Solar LLC

CERS ID: 10453255

Facility Address: 42134 Harper Lake Rd, Hinkley, CA 92347

This is an automated email sent from the CERS System. Please DO NOT REPLY.

This is a courtesy email sent to you from the California Environmental Reporting System http://cers.calepa.ca.gov/
Contact: CERS Technical Assistance (cers@calepa.ca.gov)

~~EWBGFT1~~

From: CERS Automated Messaging - DO NOT REPLY < DoNot.ReplyTo.Cers@calepa.ca.gov>

Tuesday, February 13, 2024 10:00 AM Sent:

To: Mahnaz Ghamati

Subject: Hazardous Materials Inventory for CERS ID 10453255 Accepted By Regulator

WARNING: EXTERNAL EMAIL. Exercise caution when opening links or attachments.

Your Hazardous Materials Inventory submittal on January 19, 2024 for Mojave Solar LLC (CERS ID 10453255) was Accepted by San Bernardino County Fire Department on February 13, 2024. This indicates the regulator has reviewed the submittal element and finds the data/documents meet state and local reporting requirements. The regulator has not necessarily field-verified the submitted data. Any comments from the regulator are shown below.

CONDITIONALLY ACCEPTED. This submittal was accepted, however the following must be corrected: ** Must mark "No" to trade secret for items on hazardous materials inventory. If item is a trade secret, a trade secret disclosure form must be submitted for review. ** If you have any questions, please contact Aleasha Enciso at aenciso@sbcfire.org or (909) 386-8401.

Facility Name: Mojave Solar LLC

CERS ID: 10453255

Facility Address: 42134 Harper Lake Rd, Hinkley, CA 92347

This is an automated email sent from the CERS System. Please DO NOT REPLY.

This is a courtesy email sent to you from the California Environmental Reporting System http://cers.calepa.ca.gov/
Contact: CERS Technical Assistance (cers@calepa.ca.gov)

~~6YP7BDY~~

Phone: 760 308 0400

Appendix O

HAZ-6

Site Security





January 25, 202 4		
Submitted Electronically		
ATTN: California Energy Commission RE: Affidavit of Compliance for Project O	wners	
To Whom it May Concern:		
•	:	·
;		
	1	
		-named project.
Dated this 25 day of January 2024.		
Rr Collaft	25 ene 2024	
Signature	Date	

THIS AFFIDAVIT OF COMPLIANCE SHALL BE APPENDED TO THE PROJECT SECURITY PLAN AND SHALL BE RETAINED AT ALL TIMES AT THE PROJECT SITE FOR REVIEW BY THE CALIFORNIA ENERGY COMMISSION COMPLIANCE PROJECT MANAGER.



UNIVAR SOLUTIONS SECURITY PROGRAM

As an international distributor of industrial chemicals, a participant in the National Association of Chemical Distributors Responsible Distributor program, and an active member of the communities we serve, Univar Solutions USA LLC (Univar) has long had policies and procedures in place to ensure the security of our products, facilities, employees and communities. The following summary outlines the major provisions of Univar's Security Program which reflects not only prudent measures to maximize the secure and safe handling of chemicals, but also the security requirements of various federal programs related to management of hazardous materials including DOT hazardous material transportation requirements, DHSCFAT program and Department of Commerce import rules among others. Note that this description is necessarily a broad overview of Univar's security program as various agencies limit the security related information that can be disclosed.

For our business partners that are C-TPAT certified please consider the following outline a demonstration of the degree to which Univar complies with C-TPAT security criteria.

BUSINESS PARTNER REQUIREMENT

Univar has a written and verifiable process for the selection of business partners including manufacturers, product suppliers and vendors. Other internal requirements such as; capability of meeting contractual security requirements and financial soundness are included in the verification process.

POINT OF ORIGIN

Univar ensures its foreign business partners have security criteria in place that enhances the integrity of the shipment at point of origin. Periodic reviews of foreign business partners' processes and facilities are conducted based on risk.

CONTAINER SECURITY

Container integrity is maintained as mandated by international cargo transport laws and regulations.

EN ROUTE SECURITY

Hazardous cargo is secured while in transit. Additionally, products and routes are annually evaluated to assess potential security risks.

COMMON CARRIER EVALUATION

In addition to the above security measures, Univar has taken steps to verify our common carriers' compliance with DOT's HM-232 rules. Each common carrier has been asked to certify their security compliance with regards to HM-232.



PERSONNEL SECURITY

Personnel security begins with hiring qualified employees. Univar has established policies and procedures to ensure we hire and maintain qualified employees. These policies and procedures include, but are not limited to:

- Pre-employment background checks
- Pre-employment and random drug tests for drivers and warehouse staff
- Policy on "Standards of Conduct" (included in the Employee Handbook)
- Policy on "Confidential Information" (included in the Employee Handbook)
- Checkout procedures for terminating employees
- Referral of illegal or criminal activities to law enforcement

PHYSICAL ACCESS CONTROLS & SECURITY, PROCEDURAL & IT SECURITY

SECURITY & VULNERABILITY ASSESSMENT

Due to the hazardous nature of the chemicals we manage and distribute, Univar constantly assesses its security and vulnerability concerning internal or external threats that could potentially disrupt operations or harm our employees, communities or the environment. Univar's security program addresses the following potential sources of loss or disruption:

- Theft, vandalism, and break-ins
- Theft of confidential business information
- Sabotage of equipment, utilities, and records
- Product contamination and tampering
- Bomb threats
- Civil unrest disrupting plant access and operations
- Workplace violence and assaults

Additionally, Univar has developed a risk-based matrix to identify areas of concern and has taken steps to address those areas of concern.

The initial security evaluations periodically reviewed by the site security official to evaluate the integrity and effectiveness of security policies, procedures and systems.

UNAUTHORIZED ACCESS

Univar has established minimum facility security guidelines that must be implemented and adhered to by each facility. Those minimum guidelines include but are not limited to:

- Perimeter and warehouse security
- Equipment security
- Access controls for production areas, warehouses, utility facilities, and offices
- Signs to direct visitors and vehicles to the appropriate entry points
- Visitor control



Univar employees have been trained to question unescorted person(s) within the operating areas, and to be watchful for unusual activity on company property or in the immediate surrounding areas.

SITE SECURITY COORDINATOR

Each Univar facility has designated an employee, and an alternate, as the site security coordinator. This person(s) is responsible for performing the following security management functions:

- Prepare and implement a site specific security program consistent with the requirements herein
- Establish relationships with law enforcement and emergency response agencies
- Manage incident reporting procedures, conduct incident investigations, and if necessary, conduct investigations into breaches of company security policy
- Train employees about security awareness
- Address security issues in an emergency, participate in crisis management planning and ensure appropriate execution in emergency
- Periodically reassess the facility's site security program

TRAINING

The Security Coordinator or his/her designee will train site personnel upon hire and every three years thereafter on the site security program. At a minimum, training includes:

- Company security objectives
- Specific site security procedures:
 - Product integrity
 - Personnel security
 - Facility security
 - En-route security
- Employee responsibilities

Jack Spicusza

Should you have any general questions regarding Univar site and transit security program, please contact Jack Spicuzza, Vice President, North America Environnmental, Health, Safety and Quality at (614)309-8728 or Jeff Dixon, Director, International Trade Services at (281)543-8771.

Respectfully,

Jack Spicuzza

Vice President, North America Environmental, Health, Safety and Quality

SAMPLE CERTIFICATION (Attachment C)

Affidavit of Compliance for Hazardous Materials Transport Vendors

I, Matthew Renouf, Dist	rict Manager	
	(Name of person signing affid	avit)(Title)
	172.802 and has conducted em	pared and implemented security plan aployee background investigations in
_Airgas USA, LLC		
	(Company name)	
for hazardous materials de	livery to	
Compressed Gases a	nd Carbon Dioxide to Mojav	e Solar LLC Hinkley Ca
	(Project name and locat	ion)
1	Renouf 11/13/2023	
	(Signature of officer or ac	gent)
Dated this 25th	day of January	, 20 <u>24</u>

THIS AFFIDAVIT OF COMPLIANCE SHALL BE APPENDED TO THE PROJECT SECURITY PLAN AND SHALL BE RETAINED AT ALL TIMES AT THE PROJECT SITE FOR REVIEW BY THE CALIFORNIA ENERGY COMMISSION COMPLIANCE PROJECT MANAGER.

SAMPLE CERTIFICATION (Attachment C)

Affidavit of Compliance for Hazardous Materials Transport Vendors

l	MARY DES	CARO
	(Ni	ame of person signing affidavit)(Title)
in confor		-named company has prepared and implemented security plan 802 and has conducted employee background investigations in opports A and B.
	BECK OIL, IN	NC.
		(Company name)
for hazar	dous materials deliver	y to
	MOJAVE SOLAR LLC	C. HINKLEY, CA.
29		(Project name and location)
as require	8	nergy Commission Decision for the above-named project. Dustino (Signature of officer or agent)
Dated thi	s TWENTY-FIFTH	day of JANUARY, 20 24

THIS AFFIDAVIT OF COMPLIANCE SHALL BE APPENDED TO THE PROJECT SECURITY PLAN AND SHALL BE RETAINED AT ALL TIMES AT THE PROJECT SITE FOR REVIEW BY THE CALIFORNIA ENERGY COMMISSION COMPLIANCE PROJECT MANAGER.

206

Desert Environmental Services, Inc.

12127 Mall Blvd Suite A 389

Victorville, CA 92392

January 25., 2024

I, Fernando Nieves, Project Manager herby certify that background investigation to ascertain the accuracy of the identity and employment of all employees of:

Desert Environmental Services, Inc.

For employment at:

Mojave Solar, LLC

42134 Harper Lake Road

Hinkley, CA 92347

Have been concluded as required by the California Energy Commission for the above referenced project.

Fernando L. Nieves

Dated this 25. Day of January 2024

This affidavit of compliance shall be appended to this Project Security Plan and shall be retained at all times at the project site for review by the California Energy Commission Compliance Project Manager.

42134 Harper Lake Road Hinkley, California 92347 Phone: 760 308 0400

Appendix P

LAND-1

Farmland Mitigation





Abengoa Mojave Solar Project Mitigation Property and Edison Sandlot Transmission Upgrade Mitigation Property 2023 Annual Report



Abengoa Mojave Solar Project Mitigation Property and Edison Sandlot Transmission Upgrade Mitigation Property 2023 Annual Report

Transition Habitat Conservancy

PO Box 721300, Pinon Hills, CA 92372 (571) 481-7816 Sam Easley Sam@TransitionHabitat.org

December 2023 Annual Report

w=	00 Abengoa MSP Sandlot 2023 annual report Authors: Brendan-SDC
7	01. Authorization to hold mitigation lands 20220805
7	02. Abengoa Survey Report 2023
7	03. Workplan for DTCI Grant
7	04. 2022_990
1	05. 2022 Audit Report Final
755	06. Endowment Performance Abengoa 2023

In 2017 THC became an Accredited Land Trust by the Land Trust Alliance. This is a national mark of distinction. Accreditation affirms national quality standers are met resulting in sound finances, ethical conduct, responsible governance and lasting stewardship. THC is Authorized to Hold Mitigation Land by the California Department of Fish and Wildlife.

Exhibit 01 Authorization to Hold Mitigation lands

The Transition Habitat Conservancy (THC) acquired fee title to 234 acres owned by Solucar Inc., a subsidiary of Abengoa, in August of 2014. This acquisition serves to mitigate for the loss of desert tortoise habitat from the construction of the Abengoa Mojave Solar Project and the transmission upgrades for Edison known as Sandlot. THC manages and monitors the land use of the property in perpetuity in order to detect changes harmful to the habitat values of the property, and to take action when necessary to correct these issues. This mitigation satisfies the following permits:

- For Mojave Solar: The Abengoa Mojave Solar Project ("AMSP") in San Bernardino County, California, pursuant to California Energy Commission ("CEC") License Decision CEC-800-2010-008-CMF, dated September 2010 (the "CEC License Decision") (hereinafter "AMSP Requirements")
- For SCE: Incidental Take Permit No. 2081-2011-055-06 (the "ITP") issued by the California Department of Fish and Wildlife ("CDFW") for the Special Protection System for the Abengoa Mojave Solar Project ("SPS Project") and Lockhart Substation Project CPUC A.11-05-006, State Clearinghouse Number 2011051041, July 2011 (hereinafter "SPS Upgrade Requirements")

I. Annual Monitoring

Monitoring of all parcels occurred in 2023. For the second year in a row, most of our monitoring was accomplished using satellite imagery provided through the LENS program. This was done for a variety of reasons from cost-effectiveness to safety of our staff. However, we also monitored hundreds of restoration sites along the legal route system in this area and oversaw restoration crews in the field. Our staff spent dozens of days patrolling our lands and adjacent public land. To view a full report, open the file:

Exhibit 02 Abengoa Survey Report 2023

II. Tortoise Surveys and Plans Overview

In 2022 Edison International provided two \$20,000 grants to Transition Habitat Conservancy(THC) for a multi-faceted research project on a tortoise "hotspot" on these mitigation parcels, as well as adjacent conservation land. Prior research by Hardshell Labs, administered by THC, had identified this approximately one square mile area as having an exceptionally dense tortoise population and one with very good demographic characteristics. The second of these grants was acquired late in 2022, and project activities occurred throughout 2023 as described in previous annual updates. Multiple years of grant received from Edison has also led to a scaled-up proposal that we presented to the Wildlife Conservation Board at their November meeting. We were awarded \$1.9 million to continue studying these "hotspots" and testing innovative conservation technologies for use in desert tortoise habitat protection. Please see attached workplan for more detail on our planned grant activities on these lands.

Exhibit 03 Workplan for DTCI Grant

Continuing Threats in 2023

III. The Desert Tortoise Conservation Implications of Widespread Marijuana Cultivation in the West Mojave Desert

Many of these operations seem to have been raided, shut down, or abandoned since we first observed them arrive a few years ago. It seems like the illegal activity has ceased or slowed down, but impacts remain. The following points should be considered when examining continued threats from these grow operations.

Conservation Investment

There has been a huge investment in desert tortoise conservation in the Fremont-Kramer Critical Tortoise Habitat Unit by federal, state and conservation organizations so this area should be a top priority area for enforcement efforts. conservation investment allows for military base expansions and renewable energy and power transmission development in the west Mojave desert. Failure to protect this habitat will degrade lands already purchased for mitigation and prevent future mitigation efforts. These vital mitigation lands allow for development.

Habitat destruction

Clearance of the footprint of the greenhouses and their support structures and the establishment of many new roads providing access to remote grow ops result in direct habitat destruction, further reducing the habitat available to tortoises. Even though operations have been shut down, there has not been guidance about how to move forward with restoring their massive impacts. Trash is spreading from these abandoned structures and (possibly toxic) dust is blowing across the desert where families are camping and riding.

Habitat degradation

The damage to tortoise habitat has already occurred and restoration will take decades, if not longer, without some kind of intervention. We need funding for cleanups on private land. Or some kind of mechanism to acquire those parcels with management funding. This will be a major project, but it is a blight on our landscape to not clean up this mess.

IV. Financials

THC had Audited Financial Statements produced by an independent CPA and those are attached. In August of 2022 our Authorization to Hold Mitigation Lands from CDFW was renewed for the Baldy Mesa solar project, authorization is attached. This process is now required on a per-project basis. THC's financial position is strong thanks to rebounding endowment performance, successful grant proposals, charitable contributions, ongoing mitigation work, and shrewd investments elsewhere. Tax returns and endowment performance are also attached as exhibits below.

Exhibits 04. 2022 990 05. 2022 Audit Report 06. Endowment Performance Abengoa

Sincerely Yours,

Sam Easley, Executive Director Transition Habitat Conservancy

Sam Enely

(571) 481-7816

Sam@transitionhabitat.org

PO Box 721300

Pinon Hills, CA 92372



State of California – Natural Resources Agency
DEPARTMENT OF FISH AND WILDLIFE
Inland Deserts Region
3602 Inland Empire Boulevard, Suite C-220
Ontario, CA 91764
www.wildlife.ca.gov

GAVIN NEWSOM, Governor
CHARLTON H. BONHAM, Director

August 5, 2022

Jill Bays, President
Transition Habitat Conservancy
1681 Hillview Road
Pinon Hills, California 93272
Jill@transitionhabitat.org

Approval for Transition Habitat Conservancy to Manage and Steward Mitigation Land for the Baldy Mesa Solar Project

Dear Ms. Bays:

The Inland Deserts Region of California Department of Fish and Wildlife (CDFW) received a proposal for Transition Habitat Conservancy (THC) to manage and steward mitigation land for the Baldy Mesa Solar Project (Project; [Lake and Streambed Alteration Agreement EPIMS-SBR-13456 and Incidental Take Permit 2081-2020-037-06]). Pursuant to Government Code § 65967(c) and its regulatory authority under the Fish and Game Code, CDFW has exercised the required due diligence process in reviewing your qualifications and supporting documentation. We are pleased to inform you that THC is approved to manage and steward mitigation land for this Project.

This approval is contingent on accuracy of the information provided. THC must notify CDFW (at mitland@wildlife.ca.gov) of any substantial changes, including but not limited to, staff/consultant oversight or management of the project, business status, and financial status. At such point, CDFW will provide information on the documentation needed to reevaluate the entity's qualifications.

CDFW's regional staff reviews a proposed entity's qualifications for specific projects on a project-by-project basis. If THC is proposed to hold a conservation easement or manage and steward mitigation land for another project, CDFW regional staff will conduct a separate project specific review. CDFW may request additional documentation or updates to the information previously submitted for their review.

Please provide a copy of this letter to the project proponent to confirm that THC has been approved to manage and steward mitigation land for the Project. If you have questions, please contact Rose Banks at (760) 218-0022, or by email at rose.banks@wildlife.ca.gov.

Sincerely,

llisa Ellsworth Alisa Ellsworth

Environmental Program Manager

Jill Bays, President Transition Habitat Conservancy August 5, 2022 Page 2

ec: AES Clean Energy
Dallas Pugh, Senior Manager Permitting
Dallaspugh@aes.com

California Department of Fish and Wildlife Habitat Conservation Planning Branch mitland@wildlife.ca.gov

Melani Millard, Senior Land Agent Melani.Millard@wildlife.ca.gov



Monitoring Survey
Transition Habitat Conservancy
Property: Abengoa
Location: Fremont-Kramer Desert Wildlife Management Area

ocation: Fremont-Kramer Desert Wildlife Management Area
Date: December 2023

Abengoa Annual Monitoring Survey

Contents

Contents	1
Executive Summary	2
Property Description Sandlot	3
Property Description MSP	3
Legal Description of Property and Conservation Values	4
Location Maps	6
Location Maps	7
Summary of Site Inspection	8
Summary Land Use Changes Observed	8
Signature Page	9
Detailed Monitoring Report	10



Property: Abengoa

Location: Fremont-Kramer Desert Wildlife Management Area

Date: December 2023

Executive Summary

The Transition Habitat Conservancy (THC) acquired fee title to 234 acres owned by Solucar Inc., a subsidiary of Abengoa, in August of 2014. This acquisition serves to mitigate for the loss of desert tortoise habitat from the construction of the Abengoa Mojave Solar Project and the transmission upgrades for Edison known as Sandlot. THC manages and monitors the land use of the property in perpetuity in order to detect changes harmful to the habitat values of the property, and to take action when necessary to correct these issues. This mitigation satisfies the following permits:

- For Mojave Solar: The Abengoa Mojave Solar Project ("AMSP") in San Bernardino County, California, pursuant to California Energy Commission ("CEC") License Decision CEC-800-2010-008-CMF, dated September 2010 (the "CEC License Decision") (hereinafter "AMSP Requirements")
- For SCE: Incidental Take Permit No. 2081-2011-055-06 (the "ITP") issued by the California Department of Fish and Wildlife ("CDFW") for the Special Protection System for the Abengoa Mojave Solar Project ("SPS Project") and Lockhart Substation Project CPUC A.11-05-006, State Clearinghouse Number 2011051041, July 2011 (hereinafter "SPS Upgrade Requirements")

The parcels subject to this monitoring parcel are owned by the Transition Habitat Conservancy and are subject to a Conservation Easement with specific conservation values described in the section "Legal Description of Property and Conservation Values." In order to ensure these specific conservation values are upheld, yearly monitoring is prescribed.

Monitoring Plan: Annual Monitoring of all parcels occurred in 2023. For the second year in a row, most of our monitoring was accomplished using satellite imagery provided through the LENS program. This was done for a variety of reasons from cost-effectiveness to the safety of our staff.

The parcels were visited several times throughout the year, but formal monitoring was completed in July of imagery obtained in June. The large number of informal visits throughout the year ensures that we have a very good handle about what is happening on this property. Other than three designated routes that traverse the parcels, there were no new observed land uses on the property.



Property: Abengoa

Location: Fremont-Kramer Desert Wildlife Management Area

Date: December 2023

Property Description Sandlot

Conservation Area Name: Fremont-Kramer Desert Wildlife Management Area

Assessor Parcel No: 0490-222-39 (previously 0490-184-48)

Acres: \pm 102 acres

Landowner: Transition Habitat Conservancy

Conservation Easement Grantee: California Department of Fish and Wildlife

Summarized Legal Description: The property is a portion of the W½ of the E½ of Sections 23 and 26, Township 11 North, Range 5 West, San Bernardino Base and Meridian, County of San Bernardino, State of California.

Property Description MSP

Assessor Parcel No(s): 0490-222-39 (previously 0490-223-35 & 0490-223-37)

Acres: $73 \pm acres (0490-223-35)$ and $58 \pm acres (0490-223-37)$

Total acreage: $132.78 \pm acres$

Landowner: Transition Habitat Conservancy

Conservation Easement Grantee: California Department of Fish and Wildlife

Summarized Legal Description: The property is a portion of the W½ of the E½ of Sections 23 and 26, Township 11 North, Range 5 West, San Bernardino Base and Meridian, County of San Bernardino, State of California. USGS Quadrangle: 1986, 7.5-minute series, Lockhart, California Quadrangle, provisional edition.

Directions to Property: From Kramer Junction, CA, travel east on CA Highway 58 for approximately 13 miles. Turn north and travel on Harper Lake Road for approximately seven miles. Turn west on Hoffman Road and travel for approximately 2.4 miles to reach the east boundary of the property.

Monitor(s): Sarah Berryman and Tim Shields

Date of inspection: July 3, 2023 (image from 6/14) and informally throughout the year

Season of Inspection: Summer 2023



Property: Abengoa

Location: Fremont-Kramer Desert Wildlife Management Area

Date: December 2023

Legal Description of Property and Conservation Values

Parcel APN 0490-184-48 is located in the valley surrounding Harper Dry Lake, three miles west of Harper Dry Lake and 19 miles northwest of Barstow, California. The Easement Area rests on the relatively flat bajada draining into Harper Dry Lake. The Easement Area consists of one assessor parcel located within Township 11 North, Range 5 West, San Bernardino Base and Meridian, County of San Bernardino, State of California, and is described as the southeast quarter of Section 23 excepting therefrom the north half of the north half of said southeast quarter, also excepting therefrom the easterly 1,700 feet of the southeast quarter of said Section 23, together with the northeast quarter of Section 26 excepting therefrom the easterly 1,700 feet of said northeast quarter.

The Easement Area is within the Fremont-Kramer Desert Wildlife Management Area and forms a portion of THC's Lockhart Ecological Reserve. The Easement Area conserves critical habitat for the federally threatened desert tortoise and the state-listed Mohave ground squirrel, and also provides protection for special vegetation communities, including shadscale and spinescale scrub. The terrain on the parcel is relatively level with a slight downward gradient to the northeast. The elevation ranges between 2,090 and 2,130 feet above mean sea level.

The specific Conservation Values as described in the Conservation Easement are: land being in an unimproved natural condition, with high quality habitat for desert tortoise, Mohave ground squirrel, and containing shadscale scrub intergrading with spinescale scrub.

Parcels APN 0490-223-35 and APN 0490-223-37, These parcels are located in the valley surrounding Harper Dry Lake, three miles west of Harper Dry Lake and 19 miles northwest of Barstow, California. The parcels rest on the relatively flat bajada draining into Harper Dry Lake but contain low hills in its northernmost one-quarter. The two parcels are located within Township 11 North, Range 5 West, San Bernardino Base and Meridian, County of San Bernardino, State of California, and are described as the north half of the north half of the east half of Section 23, excepting therefrom the easterly 1,700 feet, together with the south half of the north half of the north half of the north half of the south half of the east half of Section 23, excepting therefrom the easterly 1,700 feet (APN 0490-223-35) and the east half of the south half of Section 14, excepting therefrom the easterly 1,700 feet (APN 0490-223-37).



Monitoring Survey
Transition Habitat Conservancy
Property: Abengoa

Location: Fremont-Kramer Desert Wildlife Management Area

Date: December 2023

The Easement Area is within the Fremont-Kramer Desert Wildlife Management Area and forms a portion of THC's Lockhart Ecological Reserve. The properties conserve critical habitat for the federally threatened desert tortoise and the state-listed Mohave ground squirrel and provide protection for the burrowing owl and other special-status plant and animal species. The terrain of the Easement Area is relatively level in the southern three-quarters and contains low, rocky hills in the northern one-quarter, with an overall downward gradient to the northeast. The elevation ranges between 2,080 and 2,250 feet above mean sea level.

The specific Conservation Values as described in the Conservation Easement are: land being in a natural condition, with high quality habitat for desert tortoise, Mohave ground squirrel, burrowing owl, and other special-status plant and animal species.



Property: Abengoa

Location: Fremont-Kramer Desert Wildlife Management Area

Date: December 2023

Location Maps

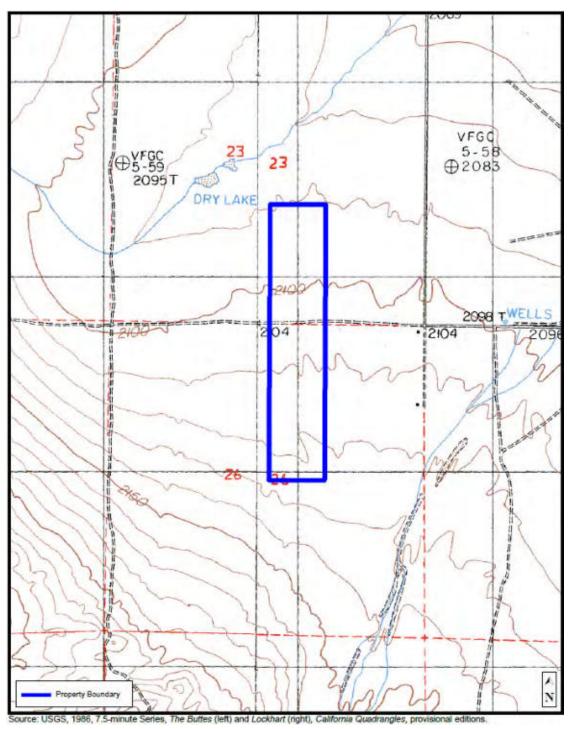


FIGURE 1. Aerial view of parcel 0490-184-48

Monitoring Survey Transition Habitat Conservancy Property: Abengoa

Location: Fremont-Kramer Desert Wildlife Management Area Date: December 2023

Location Maps

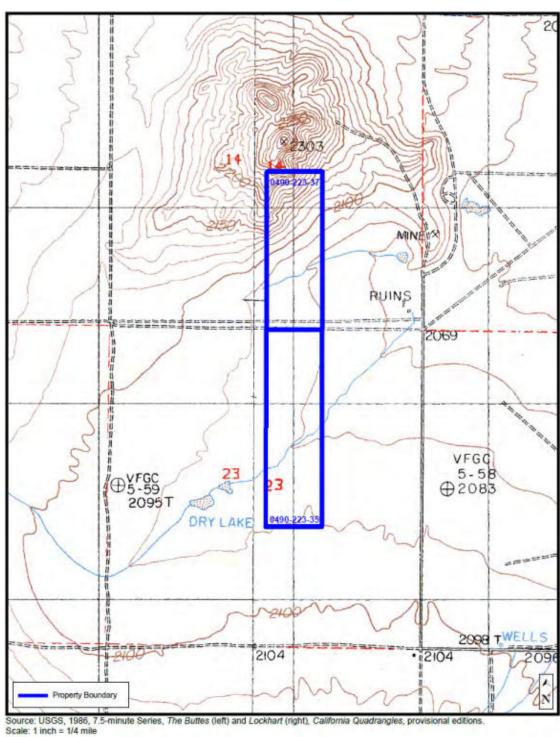


FIGURE 2. Aerial view of parcel 0490-223-35 and 0490-223-37



Property: Abengoa

Location: Fremont-Kramer Desert Wildlife Management Area

Date: December 2023

Summary of Site Inspection

Inspection Items	None	Onsite	Nearby
Landscape Alterations	Х		
Roads, paved	X		
Dump areas of any kind	Х		
Utility lines outside existing locations	Х		
Wells and/or other water developments outside existing locations	Х		
Structures of any type except fencing	X		
Mines, shafts, pits	Х		
Pipelines (water or otherwise) outside existing locations	Х		
Billboards	X		
Off-Road Vehicle Use		Х	X
Physical Improvements of Any Kind	X		
Grading or excavation	Х		
Commercial uses	X		

Summary Land Use Changes Observed

Persistent tracks on an old roadbed along the western boundary of parcel 0490-223-37 but no trespass is observed heading onto the property. The main vehicle route in the area that passed through this tortoise hotspot was decommissioned and disguised by THC in 2021 and touched up by more volunteers in 2023. No other land uses of note.



Property: Abengoa

Location: Fremont-Kramer Desert Wildlife Management Area

Date: December 2023

Signature Page

Prepared by:

Name: Sarah Berryman Signature: Date:

Title: Natural Resources Biologist

01/30/2024

Approved by:

Name: Sam Easley Signature: Date:

Title: Executive Director

Detailed Monitoring Report

See following pages.

AbengoaA - Fremont-Kramer


Remote Monitoring Report

Transition Habitat Conservancy

January 28, 2024



Property Overview

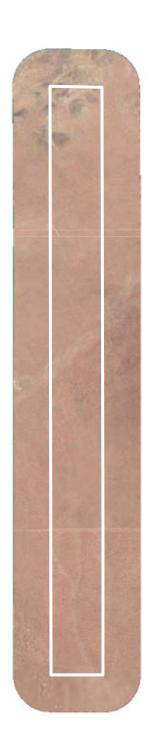


1000 ft

CAPTURE DATE

June 14, 2023

SOURCE

Maxar WorldView (0.5m)
Includes copyrighted material of Maxar Technologies Inc. 2023

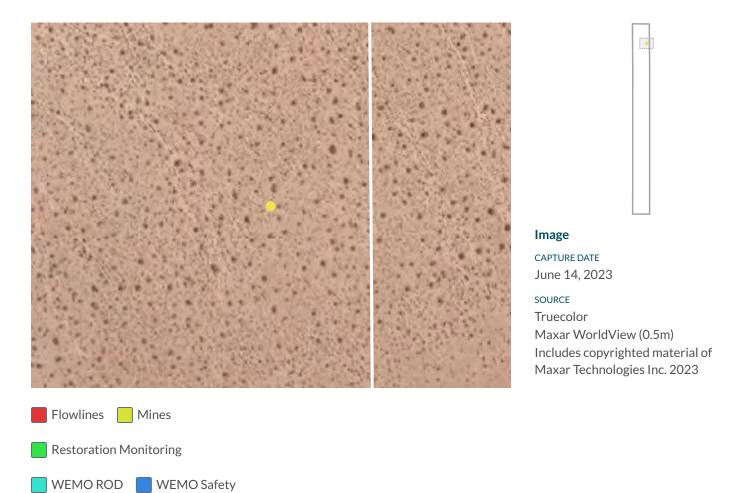

Interpretation

LOCATION

NOTE

35.04476, -117.37261

There appears to be an old, faint track mark here.

INTERPRETER

Sarah Berryman

INTERPRETATION DATE



Image

CAPTURE DATE
June 14, 2023

SOURCE

Truecolor

Maxar WorldView (0.5m) Includes copyrighted material of Maxar Technologies Inc. 2023

Flowlines Mines

Restoration Monitoring

WEMO ROD WEMO Safety

Interpretation

CENTER

35.04438, -117.37344

NOTE

There are old bike and two-tracks visible in this area.

AREA

3.95 acres

INTERPRETER

Sarah Berryman

INTERPRETATION DATE



Interpretation

CENTER

NOTE

35.04281, -117.37493

There is a track exiting the property here as well as a small intersection of track marks.


AREA

0.89 acres

INTERPRETER

Sarah Berryman

INTERPRETATION DATE

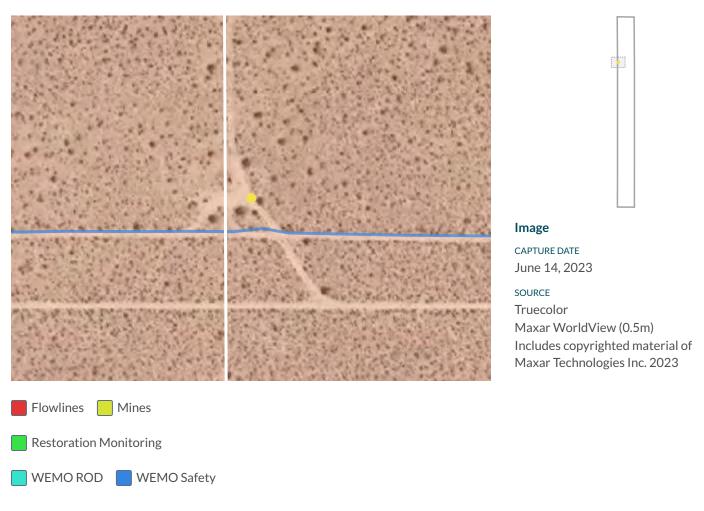

Interpretation

LOCATION

35.04078, -117.37508

INTERPRETER


Sarah Berryman

INTERPRETATION DATE

July 3, 2023

NOTE

An old road is here, but is blocked off by rocks. A currently used parking area is here, and is utilized by THC to survey the area.

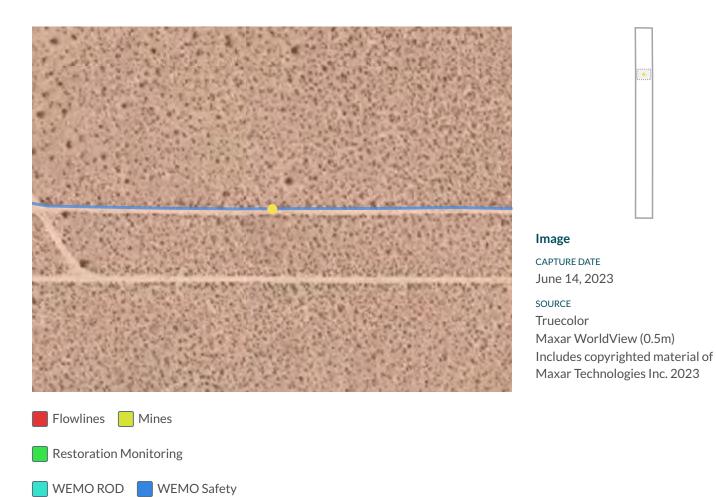

Interpretation

LOCATION

NOTE


35.04061, -117.37367

WEMO route FP5342 cuts through this property.

INTERPRETER

Sarah Berryman

INTERPRETATION DATE

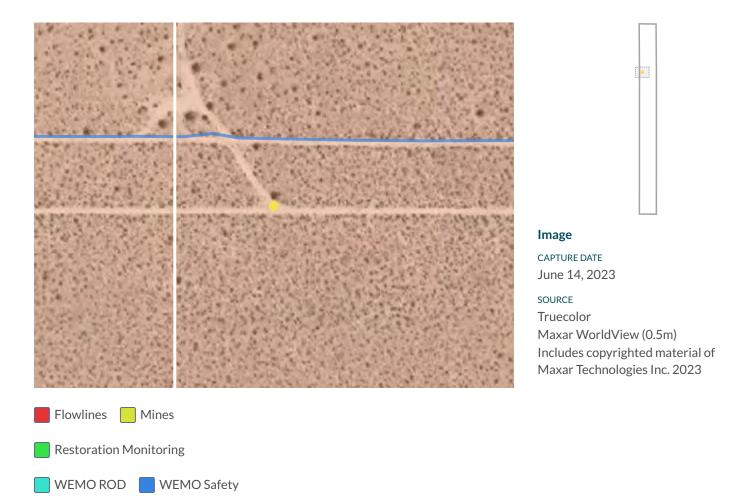

Interpretation

LOCATION

NOTE


35.04033, -117.37469

There is a cross over and parallel route to FP5342 here.

INTERPRETER

Sarah Berryman

INTERPRETATION DATE

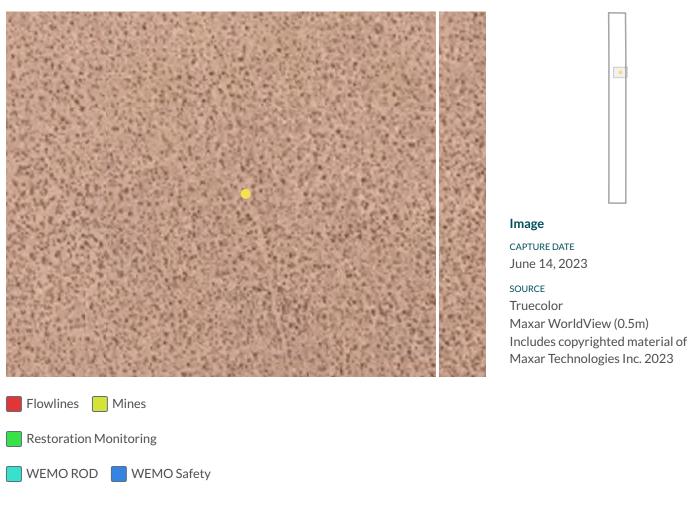

Interpretation

LOCATION

NOTE


35.03861, -117.37306

There is an old route or incursion visible here. On the ground the entry and exit points are not visible.

INTERPRETER

Sarah Berryman

INTERPRETATION DATE

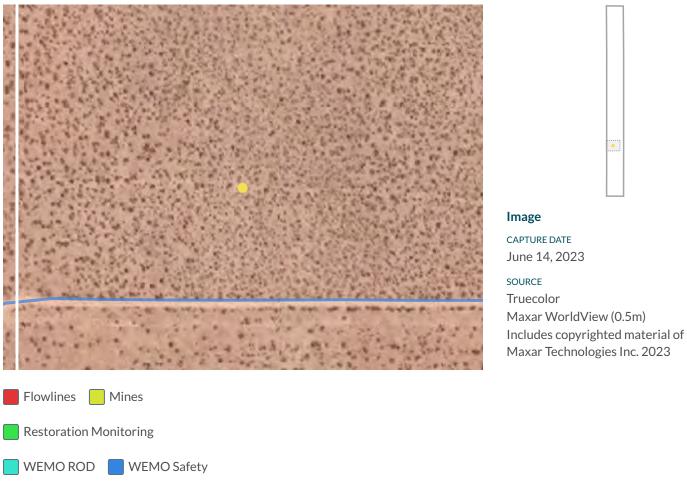

Interpretation

LOCATION

NOTE


35.02627, -117.37401

An old route or fence line is visible here on the property.

INTERPRETER

Sarah Berryman

INTERPRETATION DATE

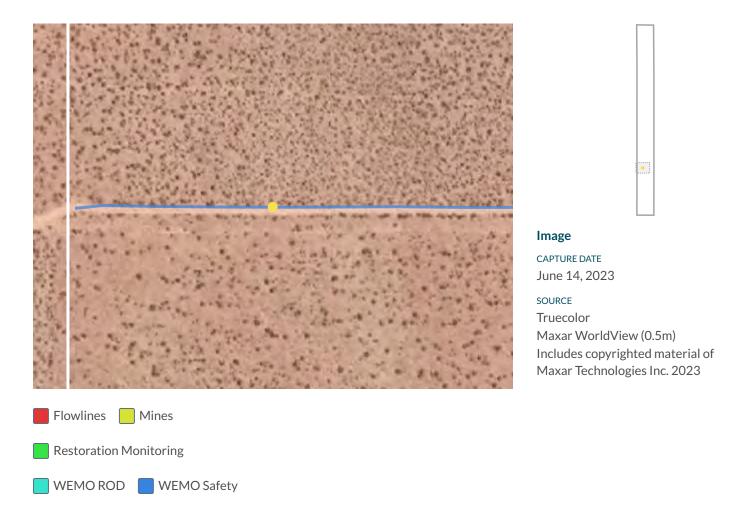

Interpretation

LOCATION

NOTE


35.02578, -117.37412

WEMO route FP5334 runs east and west across the property here.

INTERPRETER

Sarah Berryman

INTERPRETATION DATE

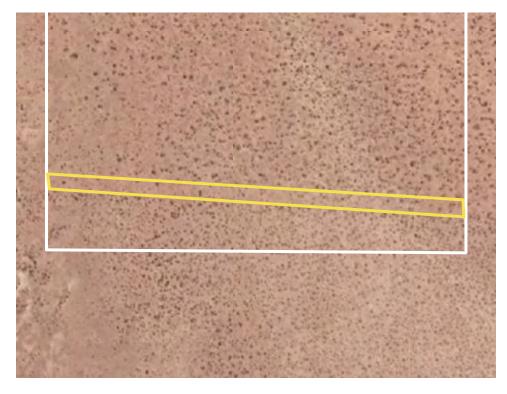

Image

CAPTURE DATE June 14, 2023

SOURCE

Truecolor

Maxar WorldView (0.5m) Includes copyrighted material of Maxar Technologies Inc. 2023

Flowlines Mines



Restoration Monitoring

WEMO ROD WEMO Safety

Interpretation

CENTER

NOTE

35.01885, -117.37363

This area looks like it had been cleared a long time ago.


AREA

0.76 acres

INTERPRETER

Sarah Berryman

INTERPRETATION DATE

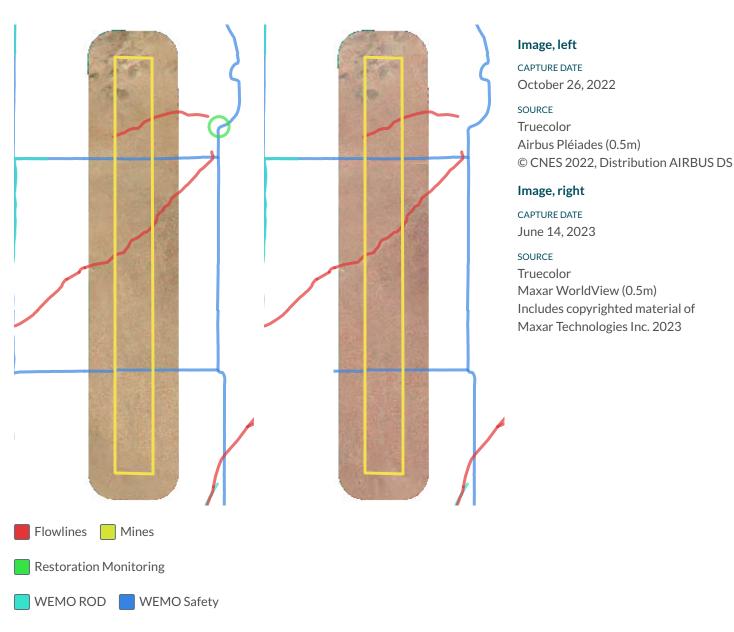

Interpretation

35.03132, -117.37392

CENTER NOTE

There have been no significant changes in land usage between 2022 and 2023.

AREA

233.68 acres

INTERPRETER

Sarah Berryman

INTERPRETATION DATE

Phone: 760 308 0400

Appendix Q

Worker Safety-6

SBCFD Payments

Mojave Solar LLC

42134 Harper Lake Road Hinkley, California 92347 Phone: 760 308 0400

Submitted Electronically

Subject: 09-AFC-5C Condition Number:

WORKER SAFETY-6

Description: SBDFD Annual O&M Contribution Verification (2022-2023)

Submittal Number: WKSF6-10-00

October 17, 2023

Ashley Gutierrez, CPM
California Energy Commission
1516 Ninth Street
Sacramento, CA 95814
Ashley.Gutierrez@energy.ca.gov

Ms. Gutierrez,

Attached, please find confirmation of the Mojave Solar Project's compliance with WORKER SAFETY-6, with respect to the annual O&M Contributions as required by Section 2(b) of the Agreement By and Among the San Bernardino County Fire Protection District and The County of San Bernardino and Mojave Solar LLC Related to Fire Protection and Emergency Medical Services Mitigation for the Mojave Solar Project (the "Fire Services Agreement"). The backup documentation provides support for (i) agreement by SB County Fire with the calculated payment amount and allowable tax offsets, (ii) confirmation of receipt of payment by SB County Fire, (iii) the calculation of the payment amount and allowable tax offsets with references to the applicable sections of the Fire Services Agreement; (iv) parcel maps and property tax statements, (v) the allocation of property tax payments to MSP for the applicable parcels, and (vii) the General Fund share allocation table.

Should you have any questions or comments, please don't hesitate to contact me.

Sincerely,

Mahnaz Ghamati

Quality, Environmental & Compliance Manager

ASI Operations LLC

42134 Harper Lake Rd Hinkley, CA 92347 Cell: (760) 498-0549

mahnaz.ghamati@atlantica.com

Attachments: Backup documentation. Payment receipt confirmation and calculation.

Calculation of O&M Contribution	Comments
Prior Year O&M Contribution Annual Value	\$ 411,000.00 Initial Year
ECI for December 2022	5.70% See Attachment 4
Total O&M Contribution Due for This Period	\$ 434,427.00 See Section 2(a) Below
Property Tax Offset	
MSP Property Taxes Paid APN 0490-121-49 (TRA 56103)	\$ 919,856.39 See Attachment 1
MSP Property Taxes Paid APN 0490-121-49 (TRA 56103)	\$ 356,739.53 See Attachment 1
SB County General Fund Share for TRA 56103	17.3568% See Attachment 3
Property Taxes to SB General Fund	\$ 221,576.10 Taxes x TRA GF Share %
Sales Taxes Paid to SB General Fund	\$ 28,346.74 Sales Taxed Paid (*)
Calculated Offset (max 60% of \$434,427.00)	\$ (249,922.84) See Section 3(b) Below
Net O&M Contribution Due	\$ 184,504.16

(*) See calculations on separate attached PDF.

Section 2(a):

- 2. Contributions to Mitigate Fire and Emergency Response.
- (a) Annual Operations and Maintenance Costs. Beginning on the April 24, 2012, being the date the project commences construction of above-ground structures, (such date the "Commencement Date"), MS shall owe its contribution (subject to partial year proration and the offsets described in Section 3) per annum to SBCFPD to fully mitigate any and all operations and maintenance costs in connection with any need to provide fire protection and emergency response services to the Project ("O&M Contribution"), payable annually, in arrears. The amount of the O&M Contribution from the Commencement Date through the day before the date on which the project commences commercial operation, as such term is defined in California Energy Commission Decision CEC-800-2010-008 CMF, ("Operations Date") shall be \$318,000 per annum. The O&M Contribution shall be adjusted annually for each fiscal year (April 24 to April 23) in accordance with the United States Department of Labor Bureau of Labor Statistics Employment Cost Index= for Total Compensation (Not Seasonally Adjusted) for Private Industry Workers for the Los Angeles-Long Beach-Riverside, California Census Region and Metropolitan Area ("ECI"), or a comparable index agreed to by the Parties if such index is no longer available. The adjustment shall be based on the most recent 12-month ECI percentage change published prior to April 24 of each year.

The amount of the O&M Contribution from the Operations Date through the Termination Date ("Operations Period") shall be \$411,000 per annum. The O&M Contribution payment shall be due on April 23 of each year following the Commencement Date through the Termination Date (as defined below) and prorated for partial years.

Section 3(b):

(b) Credit for Certain Property Tax Payments

In addition to any refunds or offsets determined under subsection 3(a) or 3(c), up to sixty percent (60%) of the O&M Contribution shall be offset, on a dollar for dollar basis, by any property and/or possessory interest tax revenue from the Project. Tax revenue shall be calculated as an appropriate percentage of property and/or possessory tax payments made on Assessor Parcel Numbers ("APNs") for the Project (a current list of APNs attached hereto as Exhibit "D"). Tax payments shall be evidenced by payment amounts for such APNs as set forth on the County Tax Collector's website (http://www.mytaxcollector.com/trSearch.aspx, as it may be amended). Tax payments shall not include any amounts paid for penalties or interest. In the event any property tax refunds are issued for such APNs, the amount of property tax payments used to calculate tax revenue shall be reduced by the amount of the refund(s).

Amounts offset pursuant to this Section 3(b) shall be applied to the O&M Contribution due and payable for the tax year in which the applicable property and/or possessory interest tax revenue from the Project was accrued, prorated for partial years. By way of illustration, if an O&M Contribution was due on April 23, 2015, tax revenue from the tax year from April 24, 2014 through April 23, 2015 would be applied to offset the O&M Contribution due on April 23, 2015. Such offsets amount shall be calculated by MS and submitted to SBCFPD for review and approval prior to offsetting the O&M Contribution.

Invoice No.

MSOL2023



157 W. 5th Street, 2nd Floor San Bernardino, CA 92415-0451 (909) 387-5974

INVOICE ___

MOJAVE SOLAR LLC Bill to:

ATTN: Claudia Brkich 1553 W Todd Dr Ste 204 Tempe, AZ 85283

March 29, 2023

Contract #12-781

		PAYMENT DI	UE BY 4/23/2023
DESCRIPTION		Amount Due	Amount Due
O & M CONTRIBUTION PERIOD 4/24/22-	-4/23/23	\$434,427.00	
PROPERTY TAX CREDITS		(\$249,922.84)	\$184,504.16
Payment Details —	Pavi	SubTotal ments Received	\$184,504.16
MAKE ALL CHECKS PAYABLE TO:	r ayr	TIOTILO TROCTIVEU	
San Bernardino County Fire Protection District Attn: Accounts Receivable	ВА	LANCE DUE	\$184,504.16

157 W. 5th Street, 2nd Floor San Bernardino, CA 92415-0451

Office Use Only:

GL: 40709735 CC: 5900022442

Text: Solar Farm – Mojave/Abengoa Fire Services

If you have any questions, please call John Lopez @ 909-387-5625

Transaction Search Results



For the period: 04/19/2023 to 04/19/2022 To 04/19/2022 To 04/19/2022 To 04/19/2022 To 04/19/2022 To 04/19/2022 To 04/19/202 To 04/19/200 To 04/1

04/19/2023	1028911249Z1V	Z1V-Mojave Oper Cst Disb Sub: USD	ACH Debits	16941722	184,504,16

Supplier	San Bernardino County Fire
Name of financial institution	Wells Fargo Bank
Address of financial institution	333 S Grand Ave 5th Floor, Los Angeles, CA 90071
Swift Code of financial institution	WFBIUS6S
Account number	4941-04-4786
Routing Transit Number / ABA	121-000-248
Taxpayer ID number	N/A
Ref Mojave Solar - Invoices	MSOL2023
Amount Payable	184,504.16


Mojave Solar Project Property Tax Allocations


APN Descriptions - See Attachment 2		Total Bill	MSP Share	ASI Share	MSP Allocation
MSP Property Taxes Paid APN 0490-121-49 (TRA 56103)	\$	919,856.39	100.00%	0.00%	\$ 919,856.39
MSP Property Taxes Paid APN 0490-121-49 (TRA 56103)	\$	-	100.00%	0.00%	\$ -
MSP Property Taxes Paid APN 0490-121-49 (TRA 56103)	\$	356,739.53	100.00%	0.00%	\$ 356,739.53
MSP Property Taxes Paid APN 0490-171-09 (TRA 56103)	\$	-	0.00%	100.00%	\$ -
MSP Property Taxes Paid APN 0490-131-17 (TRA 56053)	\$	-	0.00%	100.00%	\$ -
MSP Property Taxes Paid APN 0490-121-47 (TRA 56103)	\$	-	0.00%	100.00%	\$ -
MSP Property Taxes Paid APN 0490-121-46 (TRA 56103)	\$	-	0.00%	100.00%	\$ -
MSP Property Taxes Paid APN 0490-223-34 (TRA 56053)	\$	-	0.00%	100.00%	\$ -
MSP Property Taxes Paid APN 0490-223-36 (TRA 56053)	\$	-	0.00%	100.00%	\$
Total	\$ ^	1,276,595.92	100.00%	0.00%	\$ 1,276,595.92

Exhibit D Assessor's Parcel Numbers

APN 0490-121-49-0-000 (Mojave Solar Project Site) APN 0490-121-49-P-000 (Mojave Solar Project Site)

Attachment 2

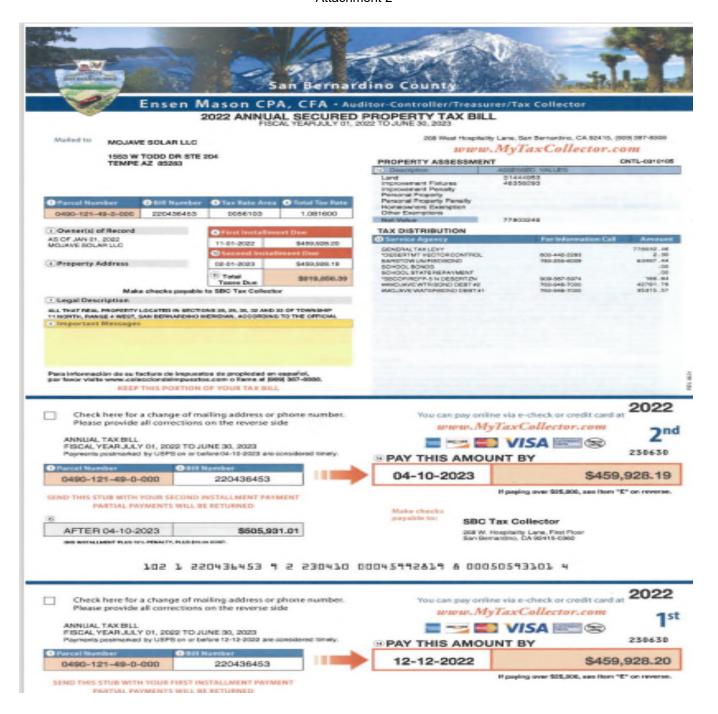

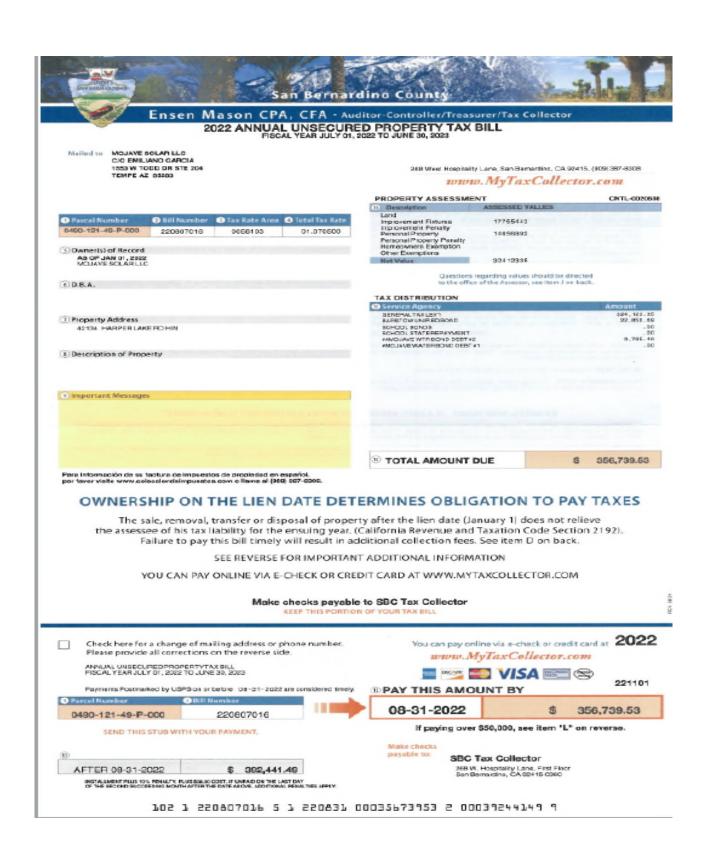

Attachment 3 https://www.sbcounty.gov/atc/DBMFiles/PIP739-PI739DYL%20ALLOC%20RPT%202%2010-31-2022 38467791522.pdf

PGM-ID: P17390YL SAN BERHARDING COUNTY AUDITOR-CONTROLLER PAGE: 1483
TIME: 22:41:07 PROPERTY TAX DIVISION DATE: 10/31/22
ROLL-YEAR: 2022 ALLOCATION PERCENTAGE CALCULATION - II

TRA	AGENCY	AGY FCT OF REVENUE	* (CURRENT (VALUE	PRIOR - VALUE	DIFFERENCE)	* .01 = TRA INCREMENT
56103	AB01 GA01 BF04 GA01 BF08 GA01 BF08 GA01 BB01 GA01 BB01 GA02 BS01 GA02 BS01 GA03 SC10 GA01 UD55 GA01 UD55 GA01 UD55 GA01 UF01 GA05 UF01 GA05 UF01 GA05 UF01 GA01 WR03 GL01 WR03 GL01	17356792 26300115 02743823 00104983 01681866 00555965 00061448 00102181 00234424 10160134 34064225 0253560 003129058 0000000 001329058 00000000	125, 627, 344 125, 627, 344	122,612,204 122,612,204 122,612,204 122,612,204 122,612,204 122,612,206 122,612,204 122,612,204 122,612,204 122,612,204 122,612,204 122,612,204 122,612,204 122,612,204 122,612,204 122,612,204 122,612,204 122,612,204 122,612,204	3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140 3,015,140	5,233.32 7,929.85 827.30 31.66 507.10 179.69 18.52 30.81 70.69 3,063.43 10,270.84 619.17 943.46 .00 220.18 18.72 286.66

3/16/23, 3:25 PM

Table 13. Compensation and wages and salaries (not seasonally adjusted): Employment Cost Index for total compensation, and wages and salaries, for private industry workers, by area - 2



U.S. BUREAU OF LABOR STATISTICS

Bureau of Labor Statistics > Economic News Release > Employment Cost Index

Economic News Release



Table 13. Compensation and wages and salaries (not seasonally adjusted): Employment Co Index for total compensation, and wages and salaries, for private industry workers, by area

Table 13. Employment Cost Index for total compensation and wages and salaries, for private industry workers by area

	12-month percent changes -							
	Total	compensatio	Wages and salaries					
Census region and metropolitan area(1)	Dec. 2021	Sep. 2022	Dec. 2022	Dec. 2021	Sep. 2022	Dec. 2022		
Northeast								
Boston-Worcester-Providence, MA-RI-NH-CT CSA	4.2	5.6	5.5	4.8	5.7	5.8		
New York-Newark, NY-N3-CT-PA CSA	3.9	4.7	5.1	4.6	4.6	5.0		
Philadelphia-Reading-Camden, PA-NJ-DE-MD CSA	3.8	4.4	4.1	4.1	4.9	4.4		
South								
Atlanta-Athens-Clarke County-Sandy Springs, GA CSA	2.5	5.0	4.4	3.1	5.2	4.8		
Dailas-Fort Worth, TX-OK CSA	3.6	5.3	5.5	4.6	5.7	5,5		
Houston-The Woodlands, TX CSA	3.5	5.4	3.1	3.9	5.9	3.3		
Miami-Fort Lauderdale-Port St. Lucie, FL CSA	5.2	6.7	6.3	6.0	7.1	6.8		
Washington-Baltimore-Arlington, DC-MD-VA-WV-PA CSA	4.0	4.4	4.3	4.2	4.1	4.3		
Midwest								
Chicago-Naperville, IL-IN-WI CSA	4.0	4.8	4.4	4.1	4.6	4.4		
Detroit-Warren-Ann Arbor, MI CSA	3.3	5.6	4.9	3.7	5.0	4.1		
Minneapolis-St. Paul, MN-WI CSA	4.4	5.7	4.9	4.5	5.9	5.3		
West								
Los Angeles-Long Beach, CA CSA	4.8	5.8	5.7	5.5	6.1	5.9		
Phoenix-Mesa-Scottsdale, AZ MSA	4.9	5.5	4.4	5.3	6.6	5.0		
San Jose-San Francisco-Oakland, CA CSA	2.8	4.5	4.6	3.2	4.4	4.5		
Seattle-Tacoma, WA CSA	6.3	3.0	3.2	3.8	5.9	6.2		

Footnotes

(1) These areas include Consolidated Statistical Areas (CSAs) and Metropolitan Statistical Areas (MSAs). Beginning with the December 2018 release, area definitions are based on Office of Management and Budget Bulletin No. 13-01, dated February 28, 2013. Previous area definitions are based on Office of Management and Budget Bulletin No. 04-03, dated February 18, 2004. For more information on metropolitan area definitions, see www.census.gov/programs-surveys/metro-micro.html.

(2) Includes wages, salaries, and employer costs for employee benefits.

SOURCE: U.S. Bureau of Labor Statistics, National Compensation Survey

Phone: 760 308 0400

Appendix R

Worker Safety-9

Joint Training with the SBCFD



Drill report

Title:	
Emergency drill re	port
FO-OM-SOL-USA-N	MJV-013
Date August 3,202	3



FO-OM-SOL-USA-MJV-013 Emergency Drill Report

Revision: 01	Date:

Page: 2 of 5

1 General data

Plant	Alpha solar field			
Area	Alpha East solar field 96C			
Time	1311			
Weather conditions	Clear sky slight breeze 100F			
Kind of drill	Vehicle accident unresponsive operator			
Description	Vehicle collided into header support driver is unresponsive passenger called in emergency			

Observer				
Company	Post	Name	Workplace	
Mojave Solar	Solar field operator	Jarmaine Graves	Alpha Solar field	

- 2 **Execution** call came in man down hit header support at Alpha solar field 96C Jessy Maxey is unresponsive. Alpha Control called 911 San Bernardino fire department was onsite doing a walk through of the plant for knowledge of fire hydrants and fire points.
- **2.1 Event and scene** fire department along with one ERT member was escorted to scene assessed area for nay hazards. Proceed to evaluate the patient for any injuries and did a full assessment to a paramedic level of care. This was a Drill so there were no injuries found and patient was ok.

Kind of emergency	Partial X Total □	
Event/ scene		Solar field operators auto accident



FO-OM-SOL-USA-MJV-013 Emergency Drill Report

Revision: 01	Date:
Page:	: 3 of 5

Mo	i awa	· 5^	lar	114	7
IVIU	Jave	30	Iai		_

Damaged plant		N/A
Situation/ area		N/A
Danca and a suitane and	Tag number	N/A
Damaged equipment	Name	N/A
Initiated management	Yes □ No X	N/A
Injured personnel	Number	N/A

2.2 Conditions before the emergency clear ski temp 100F slight wind

2.3 Execution and chronological sequence

Time	Position	Action
1311	S/F operator	Called in Man Down (J. Maxey) @96C unresponsive
1312		1312 - 911 Called (Sanchez) ERT was also called out
1316		Fire department on site
1323		Ambulance on site
1326		Drill completed

Time	Position	Action

2.4 Comments from Observers

- Observation trucks were parked close to mirrors, if there was a dust devil storm or high winds were to kick up the trucks were in the way if the mirrors needed to be stowed.
- 911 call took 4 attempts to have them answer call
- When call finally went through 911 operator placed us on hold

•



Emergency Drill Report

Revision: 01 Date:

Page: 4 of 5

2.5 Incidents and recommendations

Incidents- Faults	Recommendations	Due date	Responsible
Observation trucks were parked close to mirrors, if there was a dust devil storm or high winds were to kick up the trucks were in the way if the mirrors needed to be stowed.	When pickups are parked for work or in a drill have them out of the mirror swing area	August 31th, 2023	H&S
Only three people were able to show up from San Bernardino fire small amount of people come to call	Set up meeting with local military base for a site visit and or go to there site to talk about where we are for a joint drill in future	August 31, 2023	H&S
During the Drill the ERT team couldn't attend due to P! work being performed	When we have a drill all ERT members should be able to attend	August 31,2023	H&S
Calling in a emergency was not done right	When calling in an emergency the person calling must say there name where they are who is hurt and any other information needed for information to the control room to repeat to site personnel and 911 operator plus ERT responders	August 31,2023	H&S

FO-OM-SOL-USA-MJV-013



Mojave Solar LLC

FO-OM-SOL-USA-MJV-013 Emergency Drill Report

Revision: 01 Date:

Page: 5 of 5

Phone: 760 308 0400

Appendix S

SOIL&WATER-1

Drainage, Erosion, and Sedimentation Control Plan (DESCP)

Maintenance Order

Order N:	5814176
Location:	Mojave Solar
Order type:	ZM71
Plant:	0680

Start PM Order	Sta	rt	PM	Orde	r
----------------	-----	----	----	------	---

Observations:

Rel.PM Order Date:	01/02/2023	Ordered By:		
Functional Location:	MSPA Mojave Solar Pla	ant Alpha		
Equipment:			Tag#:	
Description:	Legal020	PM Activity: S27 Preve	entive	
Legal020 Stormwate	r weekly inspection			
	Work observations, w	vorkplace security meas	ures	/
Completed	Inspection	1 Please :	see a	Hadourt
		34		*
Priority:	3: Medium	To be done in:	Preventi order (S	ve maintenance olar US)
Execution PM Order:	11			
Completion date:	1/2/23	To be done by:		olar Field
	-//	Work center:	N	/ISPSFD
Hours spent:	6hr	Signature:	Tito	
	ration Description			Quantity Unit
Operation descriptio	n:	Real T.	Start	To be done by:
checklist This is pertaining to Certification SWAT3. Form code MJV-PRC https://atlanticayield ave/1 Procedures/00 Checklists/Operation monthly report form.doc?d=w21e5f. 1&web=1&e=JI0o2h	l.sharepoint.com/:w:/r/s), Forms Logs ns/MJV-PRO-TEM-0013 5f8ed6c4742b0ef8f48aa	Condition of ites/DocuMoj Stormwater e99c1e3&csf=	V	
End DM Ordon				
End PM Order: Acceptance date:	HILLIAND - WAR SHOOT	Accepted by:	THE LEW	Halford P. San
Acceptance date.	/	iccopico oj.		1

Position:

843

Signature: