

LATHAM & WATKINS^{LLP}

October 31, 2011

VIA FEDEX

CALIFORNIA ENERGY COMMISSION
Attn: Docket No. 08-AFC-08
1516 Ninth Street, MS-4
Sacramento, California 95814-5512


Re: Hydrogen Energy California Project: Docket No. 08-AFC-08

Dear Sir/Madam:

Pursuant to California Code of Regulations, Title 20, Sections 1209, 1209.5, and 1210, enclosed herewith for filing please find a copy of Applicant's Status Report No. 9.

Please note that the enclosed submittal was filed today via electronic mail to your attention and served on all parties to the above-referenced project.

Very truly yours,


Paul E. Kihm
Senior Paralegal

Enclosure

cc: 08-AFC-08 Proof of Service List (w/encl., via e-mail and U.S. Mail)
Michael J. Carroll, Esq. (w/encl.)
Marc T. Campopiano, Esq. (w/encl.)

650 Town Center Drive, 20th Floor
Costa Mesa, California 92626-1925
Tel: +1.714.540.1235 Fax: +1.714.755.8290
www.lw.com

FIRM / AFFILIATE OFFICES

Abu Dhabi	Moscow
Barcelona	Munich
Beijing	New Jersey
Boston	New York
Brussels	Orange County
Chicago	Paris
Doha	Riyadh
Dubai	Rome
Frankfurt	San Diego
Hamburg	San Francisco
Hong Kong	Shanghai
Houston	Silicon Valley
London	Singapore
Los Angeles	Tokyo
Madrid	Washington, D.C.
Milan	

File No. 045049-0001

DOCKET
08-AFC-8
DATE <u>OCT 31 2011</u>
RECD. <u>NOV 01 2011</u>

Michael J. Carroll
Marc T. Campopiano
LATHAM & WATKINS LLP
650 Town Center Drive, Suite 2000
Costa Mesa, CA 92626
(714) 540-1235

STATE OF CALIFORNIA
ENERGY RESOURCES
CONSERVATION AND DEVELOPMENT COMMISSION

In the Matter of:)	Docket No. 08-AFC-8
)	
REVISED APPLICATION FOR)	APPLICANT'S STATUS REPORT NO. 9
CERTIFICATION)	
FOR THE HYDROGEN ENERGY)	
CALIFORNIA PROJECT)	
-----)	

Applicant Hydrogen Energy California LLC (Applicant) hereby files its Status Report 9 with respect to the Hydrogen Energy California Project (HECA or Project).

Introduction and Project Overview

Hydrogen Energy California LLC is proposing to design, construct and operate an Integrated Gasification Combined Cycle (IGCC) power facility with carbon capture, utilization and sequestration (CCUS) in Kern County, California. The Hydrogen Energy California Project will gasify a 75% coal and 25% petroleum coke (petcoke) fuel blend to produce a hydrogen-rich gas which will fuel a combustion turbine operating in combined cycle mode. The Project will generate approximately 400 MW (gross) and 288 MW (net) of low-carbon baseload electricity while capturing carbon dioxide (CO₂) and transporting it for enhanced oil recovery (EOR) and sequestration. The Project is designed to achieve at least 90% CO₂ capture efficiency while permanently sequestering more than 2.0 million tons per year. The Project Site is located near the Elk Hills Field and the unincorporated community of Tupman in western Kern County, California, as shown on Figure 1-1, Project Vicinity Map.

Project Modifications

SCS Energy California LLC acquired 100% ownership of Hydrogen Energy California LLC from BP Alternative Energy North America Inc. and Rio Tinto Hydrogen Energy LLC on September 2, 2011. SCS Energy California LLC is an affiliate of SCS Energy

LLC (SCS Energy). SCS Energy is a private power plant development company headquartered in Concord, Massachusetts.

SCS Energy has modified the Project design to better meet market demands. Unless otherwise noted below, Project design elements will not appreciably change from those detailed in previous regulatory filings. Basic Project components remain unchanged:

- IGCC
- 90% CCUS via EOR at the adjacent Elk Hills Field
- Project Site
- State-of-the-art air emissions controls
- Brackish make-up water supplied by the Buena Vista Water Storage District
- Zero liquid discharge

Notable modifications are detailed below:

- Mitsubishi Heavy Industries (MHI) oxygen-blown dry feed gasification technology has been selected.
- A new rail spur will be constructed to the Project Site in order to facilitate feedstock and equipment delivery and fertilizer and product off-take. This modification will help to reduce truck traffic on local roads.
- A new, integrated fertilizer plant will produce approximately 1 million tons per year of nearly carbon free nitrogen-based fertilizer.
- The 75% coal, 25% petcoke fuel blend will be used for the life of the facility.
- Natural gas will be used for start-up only, not for gas turbine routine operation. A natural gas interconnection will be made with a PG&E natural gas pipeline located approximately 8 miles north of the Project Site.
- Potable water will be delivered from a new West Kern Water District potable water production site less than 1 mile away or from new on-site well(s), thereby eliminating the need for a 5.5 mile potable water line.

Location

The combined Project Site and Controlled Area remain the same as detailed in previous filings. The combined 1,101 acres are located in south-central California near the unincorporated community of Tupman, approximately 7 miles west of the city of Bakersfield, as shown on Figure 1-1, Project Vicinity Map. The Project Site and vicinity is predominantly used for agricultural purposes, including cultivation of cotton, alfalfa and onions.

Permitting

The Project is subject to regulatory oversight by federal, state and regional/local agencies. At the federal level, the Project is subject to environmental review under the National Environmental Policy Act (NEPA), with the DOE serving as Lead Agency. At the state level, the project will be subject to the California Environmental Quality Act (CEQA) with the California Energy Commission (CEC) serving as Lead Agency. The DOE and CEC will be working together to combine these regulatory processes in a manner that enhances public involvement.

Process Overview

The Project design consists of an IGCC polygeneration plant that will : (1) use coal/petcoke gasification to create hydrogen while capturing over 90% of the CO₂, (2) use a hydrogen-fired combined cycle power block, (3) include a hydrogen-fed, 90% carbon-free fertilizer plant, and (4) sequester the captured CO₂ by using it for EOR at the adjacent Elk Hills Field.

Gasification

The Project uses Mitsubishi Heavy Industries (MHI) gasification technology. The MHI oxygen-blown gasifier is a pressurized, upflow, entrained-flow slagging reactor with a two-stage operation. The MHI gasifier is a dry-feed system and the reactor internal is protected by a membrane wall. Gasification is a chemical conversion process that occurs in a reducing environment. Gasification differs from combustion in that gasification produces syngas, an intermediate product that can then be used for purposes such as generating electricity or producing chemicals.

The gasifier is fed a blend of coal and petcoke along with oxygen. Coal will be delivered to the rail unloading and transfer system at the Site. The coal is unloaded from unit trains and conveyed to coal storage. Conveyors will be fully enclosed for weather protection and to control fugitive dust. Coal feedstock buildings will be fully enclosed. Dust suppression spray systems, dust collection systems, and/or transfer design are used to control fugitive dust.

The gasification process begins with the solid feedstocks being dried by recycling hot exhaust gas through the solid feed mill. The solid feed is metered into the mill and ground and classified to meet size specifications. The feed stream is transported into pressurized feed surge storage and then pneumatically fed to the gasifier feed injectors. The feed stream chemically reacts with the oxygen in the gasifiers to form syngas, composed mostly of hydrogen and carbon monoxide. The high temperature ensures complete gasification of the feedstock and traps inorganic matter, like ash and metal, in a glassy matrix material. This material, referred to as gasification solids, is inert and can be beneficially used.

The syngas leaving the gasifiers is cooled in an efficient heat recovery system and cleaned in preparation as feedstock to the gas turbines. Post gasification treatment for syngas includes removal of entrained particulates, shift conversion of carbon monoxide and water to hydrogen and CO₂, mercury removal, and acid gas removal. The sulfur in the syngas is recovered and converted into a liquid sulfur product for sale.

Fertilizer Production

A portion of clean syngas will be sent to the pressure swing adsorption (PSA) unit to generate a high-purity hydrogen gas stream for use as a feedstock for the ammonia. The off-gas from the PSA unit is compressed and sent to the HRSG for use as duct-burner fuel. Two PSA units in series are utilized to maximize hydrogen recovery. A high-purity hydrogen stream (from the PSA unit) and nitrogen (from the ASU) are the two primary feedstocks to the ammonia plant.

Cold liquid ammonia is stored in a tank at atmospheric pressure. A vapor recovery system is included to prevent any product losses. The liquid ammonia will be pumped from the tank to the various users within the facility. The liquid ammonia is the feedstock for the fertilizer products, including urea and UAN.

There is a large degree of heat integration between the fertilizer plant and the power plant. The fertilizer plant is not self sufficient on steam and requires a large amount of medium pressure steam that is generated by the power plant HRSG.

Additionally, the Load Serving Entities have indicated the desirability for some portion of the power output to be dispatchable. The fertilizer plant production and product storage capability is an essential and integral component necessary to achieve a dispatchable power generation profile.

Power Block

The clean syngas also will be used as fuel in the combined cycle power block. The Project combined cycle power block will include one single-shaft nominal 405 MWe MHI M501G “G” class advanced combustion turbine (CT) / steam turbine (ST) / generator configured to utilize syngas, one heat recovery steam generator (HRSG), and a water cooled surface condenser. The CT, HRSG, and ST will convert chemical energy contained in the syngas fuel to electricity through the shaft power developed by the CT and ST generator and through the thermal energy recovered from the CT exhaust. This exhaust gas is converted to high-energy steam in the HRSG and combined with the high-energy steam recovered in the gasification process to generate additional electricity in the ST. The “G” class machine is arranged in a single shaft configuration where the CT and ST share a common shaft / generator.

The facility will produce a nominal 400 MW, with up to 288 MW of dispatchable power for the grid, and will produce approximately 1 million tons per year of nitrogen-based fertilizer as well as liquid sulfur for sale. At least 90% of the carbon in the raw syngas will be converted into CO₂ during steady state operation, which will be captured, compressed, and transported by pipeline for EOR and sequestration at the adjacent Elk Hills Field. A simplified block flow diagram for the Project is shown in Figure 1-2, Overall Block Flow Diagram.

Major Project resource inputs and outputs are detailed below.

Resource Inputs

Petcoke and Western Coal – The Project will use a blend of 75% coal and 25% petcoke. Petcoke will be supplied from refineries in California, and/or other regional sources. The petcoke that will be used for the Project is a by-product from the oil refining process which is predominantly exported overseas for use as a low-grade fuel. Petcoke will be blended with Western coal to diversify the feedstock supply.

Natural Gas Supply – Natural gas will be used for gas turbine start-up. A natural gas interconnection will be made with a PG&E natural gas pipeline located approximately 8 miles north of the Project Site. The interconnect will consist of one tap off the existing natural gas line, one meter set, one service pipeline service connection, and a pressure limiting station located on the Project Site.

Brackish Water Supply Pipeline – The Project will utilize brackish groundwater supplied from the Buena Vista Water Storage District located to the northwest. The raw water supply pipeline will be approximately 18 miles in length.

Oxygen - The gasification process requires high-pressure, high-purity oxygen (95% volume). The oxygen is supplied from the Air Separation Unit, which separates and purifies oxygen and nitrogen from the ambient air.

Resource Outputs

Electrical Transmission Line – An electrical transmission line will interconnect the Project to the CAISO grid. The expected tie in will be on PG&E's 230 KV transmission system.

CO₂ Pipeline – Carbon dioxide will be compressed and transported by pipeline to the adjacent Elk Hills Field for CO₂ EOR and sequestration. The CO₂ pipeline is approximately 4 miles in length.

Nitrogen-Based Fertilizer - Approximately 1 million tons per year of nitrogen-based fertilizer will be produced at the facility. The fertilizer product(s) will be stored onsite for shipment via railcars or trucks.

Liquid Sulfur– Through an oxidation and cleaning process the sulfur in the syngas is converted to a purified degassed liquid sulfur. The degassed liquid sulfur will be stored in an onsite tank for shipment via railcars or tank trucks.

Gasification Solids - Gasification solids are comprised of vitrified (glass like) material produced by melting the mineral matter in the coal and petcoke and small amounts of unconverted carbon that exit the gasifier. The low-carbon gasification solids will be washed and then transported off-site by rail or truck for sale or disposal.

Wastewater - The Project has been designed for Zero Liquid Discharge (ZLD) and therefore will not discharge surface, waste or storm water off site. Wastewater produced internally will be fully recycled and reused. Any solid materials will be trucked to an approved off-site material disposal facility in accordance with applicable regulations and permit conditions. Sanitary wastewater from restrooms, showers, and kitchens will be conveyed by an underground gravity collection system and discharged to a private on-site sewage disposal system consisting of a conventional septic tank and leach field.

Emissions Controls

The Project will produce dispatchable baseload electricity while substantially reducing greenhouse gas emissions by capturing CO₂ and transporting it for EOR and sequestration. Furthermore, the Project will employ Best Available Control Technology (BACT) to control project emissions. The following is a summary of the emission control equipment used on the Project:

- 90% of the Project CO₂ emissions will be reduced through EOR and sequestration.
- The Project will use a state-of-the-art emissions control process to minimize sulfur dioxide emissions.
- The Project incorporates post-combustion control technologies to meet BACT requirements. The HRSG includes a selective catalytic reduction (SCR) system to minimize the stack nitrogen oxide emissions and a carbon monoxide oxidation catalyst to control carbon monoxide and volatile organic compounds emissions.
- Mercury capture technology consisting of fixed beds of sulfur-impregnated activated carbon will convert more than 95% of the mercury present in syngas to a stable mercuric sulfide (HgS) product captured in the catalyst.

- The feedstock solids handling system includes rail/truck unloading using a conveyor system to transport the feedstock to storage silos. All coal feedstock buildings are fully enclosed. Dust suppression spray systems, dust collection systems, and/or transfer design are used to control fugitive dust.
- The cooling towers will include high-efficiency mist eliminators to minimize particulate emissions and reduce water losses.
- A Continuous Emissions Monitoring System (CEMS) will be installed on the HRSG and other stack emission sources required by applicable regulations and permit conditions. The CEMS records nitrogen oxide, oxygen, and carbon monoxide levels in order to demonstrate facility compliance with local, state, and federal emission requirements. Each CEMS system undergoes periodic calibration, audits, and testing to verify accuracy.

Key Project Benefits

The Project will provide numerous benefits at the local, regional, state, national and global levels. Among these benefits are the following:

1. Helping to Ensure Adequate Supplies of Electricity

The Project will provide approximately 288 MW of new, dispatchable baseload low-carbon generating capacity. The CEC estimates that the state will need to add over 9,000 MW of capacity between 2008 and 2018 to meet demand¹.

2. Protecting the Environment

At least 90% of the CO₂ in the raw syngas will be captured in a high-purity CO₂ stream during steady-state operation, compressed, and transported by pipeline for injection into secure geologic formations for EOR and sequestration. The Project will prevent the release of more than 2 million tons (roughly equivalent to the CO₂ output of 500,000 automobiles) per year of greenhouse gases to the atmosphere by sequestering them underground.

The Project will employ state-of-the-art emission control technology to achieve very low criteria pollutant emissions. The Project will conserve fresh water sources by using brackish groundwater for Project process water needs. Direct surface water discharge of industrial wastewater will be eliminated through the use of ZLD technology.

3. Protecting Domestic Energy Supplies

The Project will conserve domestic energy supplies, thereby enhancing energy security. The Project will advance technology to reduce stress on U.S. natural gas supplies by using a by-product from the oil refining process and coal to generate electricity. In addition, the Project will produce additional energy from existing California oil fields by

¹ California Energy Commission, 2007. *2007 Integrated Energy Policy Report*. Report Number CEC-100-2007-008-CMF-ES.

injecting CO₂ and increasing production by an estimated 10 to 20%.

4. Promoting Hydrogen Infrastructure

The Project will increase the supply of hydrogen available to support the state's goal of energy independence as expressed in California Executive Order S-7-04, which mandates the development of a hydrogen infrastructure and transportation in California. The Project is poised to supplement the quantities of hydrogen necessary for these future energy and transportation technologies and support California's role as a world leader in clean energy.

5. Stimulating the Local and California Economy

The Project will boost the local and California economy. At the peak of construction, HECA will employ an estimated 2,000 workers, and will provide up to 140 permanent operational positions once completed. The Project will generate an economic impact of \$6.4 billion in Kern County during construction and the first 20 years of operation.

6. Increase Domestic Production of Fertilizer

The Project will produce approximately 1 million tons per year of nearly carbon-free domestic fertilizer that will be available for regional markets.

Schedule

The milestones for the Project are anticipated to be as follows:

HECA submits updated Project application materials ²	March 2012
Start of construction	June 2013
Completion of construction	October 2016
Commissioning and initial startup	October 2016 through August 2017
Commercial operation of the Project	September 2017

Public Outreach

The Applicant is committed to maintaining and building upon past public outreach efforts and will actively seek opportunities to engage the public in the decision making process. The Project has retained the HECA Information Center located at 189 East Front Street Buttonwillow, CA 93205. In addition, the Project has recently updated the "Project News" section of the website, which can now be accessed at (<http://hydrogenenergycalifornia.com/>) and will continue to post Project-related news, educational materials and opportunities for community involvement as information becomes available.

In addition, in October 2011, HECA representatives met with Clean Air Task Force to provide a Project overview and update, and also met with Congressman Kevin McCarthy to provide a

² Including responses to outstanding issues identified in CEC Staff letter of August 5, 2011.

Project briefing. On October 25, 2011, HECA presented a Project overview at the Annual Meeting of WESTCARB (West Coast Regional Carbon Sequestration Partnership).

DATED: October 31, 2011

Respectfully submitted,


/S/ MICHAEL J. CARROLL

Michael J. Carroll
LATHAM & WATKINS LLP
Counsel to Applicant

Enclosed Figures

Figure 1-1 Project Vicinity Map

Figure 1-2 Overall Block Flow Diagram

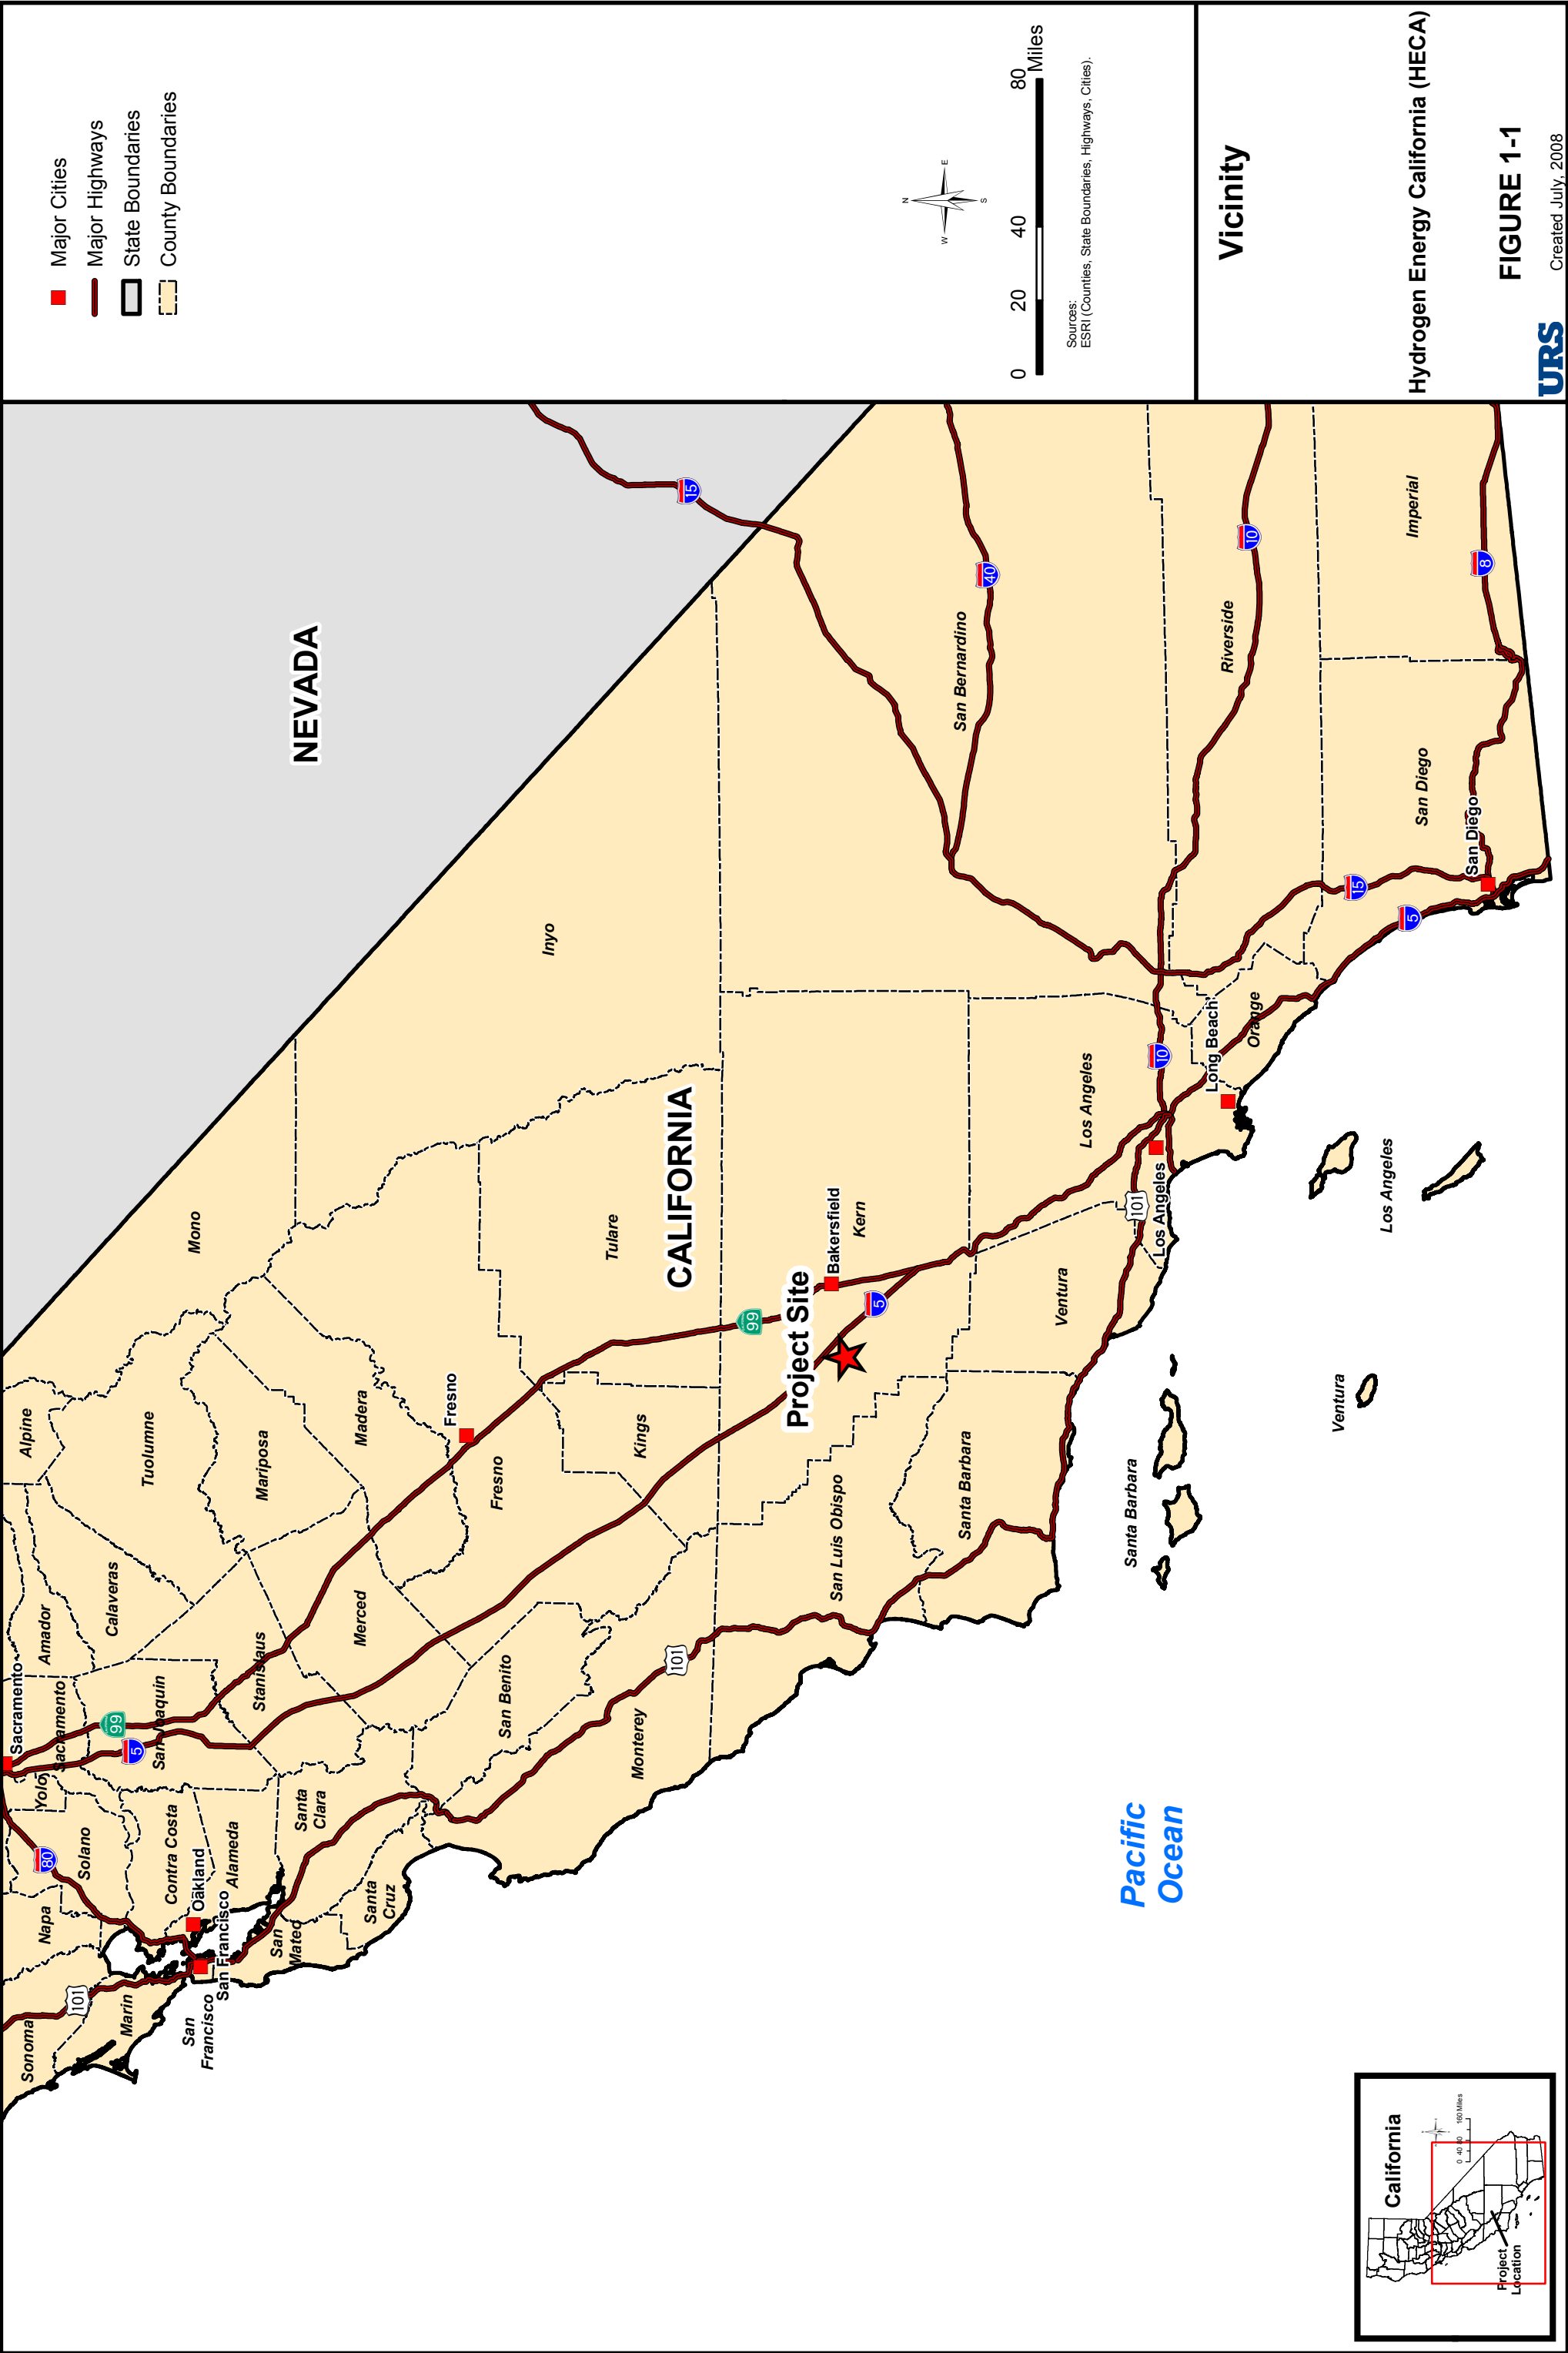

**STATE OF CALIFORNIA
ENERGY RESOURCES
CONSERVATION AND DEVELOPMENT COMMISSION**

In the Matter of:)	Docket No. 08-AFC-08
)	
APPLICATION FOR CERTIFICATION,)	PROOF OF SERVICE
FOR THE HYDROGEN ENERGY)	
CALIFORNIA PROJECT BY HYDROGEN)	(October 25, 2011)
ENERGY INTERNATIONAL, LLC)	
_____)	

APPLICANT

Marisa Mascaro
SCS Energy LLC
30 Monument Square, Suite 235
Concord, MA 01742
mmascaro@scsenergyllc.com

APPLICANT'S CONSULTANT

Dale Shileikis
Vice President
Energy Services Manager
Major Environmental Programs
URS Corporation
One Montgomery Street, Suite 900
San Francisco, CA 94104-4538
dale_shileikis@urscorp.com

George Landman
197 Woburn St.
Lexington, MA 02420
Glandman@yahoo.com

HYDROGEN ENERGY CALIFORNIA PROJECT
CEC Docket No. 08-AFC-08

INTERESTED AGENCIES

California ISO
e-recipient@caiso.com
e-mail preferred

Marni Weber
Department of Conservation
Office of Governmental and Environmental Relations
(Department of Oil, Gas & Geothermal Resources)
801 K Street MS 2402
Sacramento, CA 95814-3530
Marni.Weber@conservation.ca.gov

INTERVENORS

California Unions for Reliable Energy
Thomas A. Enslow
Marc D. Joseph
Adams Broadwell Joseph & Cardozo
520 Capitol Mall, Suite 350
Sacramento, CA 95814
tenslow@adamsbroadwell.com

Tom Frantz
Association of Irrigated Residents
30100 Orange Street
Shafter, CA 93263
tfrantz@bak.rr.com

Babak Naficy
Law Offices of Babak Naficy
Kern-Kaweah Chapter of the Sierra Club
1504 Marsh Street
San Luis Obispo, California 93401
babaknaficy@sbcglobal.net

Timothy O'Connor, Esq.
Environmental Defense Fund (EDF)
1107 Ninth St., Suite 540
Sacramento, CA 95814
toconnor@edf.org

George Peridas
Natural Resources Defense Council
111 Sutter Street, 20th Fl.
San Francisco, CA 94104
gperidas@nrdc.org

HYDROGEN ENERGY CALIFORNIA PROJECT
CEC Docket No. 08-AFC-08

ENERGY COMMISSION

James D. Boyd, Commissioner

Vice Chairman and Presiding Member
CALIFORNIA ENERGY COMMISSION
1516 Ninth Street
Sacramento, CA 95814-5512
jboyd@energy.state.ca.us

Raoul Renaud

Hearing Officer
CALIFORNIA ENERGY COMMISSION
1516 Ninth Street
Sacramento, California 95814-5512
rrenaud@energy.state.ca.us

Alan Solomon

Project Manager
CALIFORNIA ENERGY COMMISSION
1516 Ninth Street
Sacramento, California 95814-5512
asolomon@energy.state.ca.us

Lisa De Carlo

Staff Counsel
CALIFORNIA ENERGY COMMISSION
1516 Ninth Street
Sacramento, California 95814-5512
ldecarlo@energy.state.ca.us

Jennifer Jennings

Public Adviser's Office
CALIFORNIA ENERGY COMMISSION
E-mail preferred
Publicadviser@energy.state.ca.us

DECLARATION OF SERVICE

I, Paul Kihm, declare that on October 31, 2011, I served and filed copies of the attached:

APPLICANT'S STATUS REPORT NO. 9

to all parties identified on the Proof of Service List above in the following manner:

California Energy Commission Docket Unit

- ☒ Transmission via electronic mail and by depositing one copy with FedEx overnight mail delivery service at Costa Mesa, California, with delivery fees thereon fully prepaid and addressed to the following:

CALIFORNIA ENERGY COMMISSION

Attn: DOCKET NO. 08-AFC-08

1516 Ninth Street, MS-4

Sacramento, California 95814-5512

docket@energy.state.ca.us

For Service to All Other Parties

- ☒ Transmission via electronic mail to all email addresses on the Proof of Service list; and
- ☒ by depositing one paper copy with the United States Postal Service via first-class mail at Costa Mesa, California, with postage fees thereon fully prepaid and addressed as provided on the Proof of Service list to those addresses **NOT** marked "email preferred."

I further declare that transmission via electronic mail and U.S. Mail was consistent with the requirements of California Code of Regulations, title 20, sections 1209, 1209.5, and 1210.

I declare under penalty of perjury that the foregoing is true and correct. Executed on October 31, 2011, at Costa Mesa, California.



Paul Kihm